




Use toughened laminated glass if highest part of glazing is more than 5 m above finished floor level

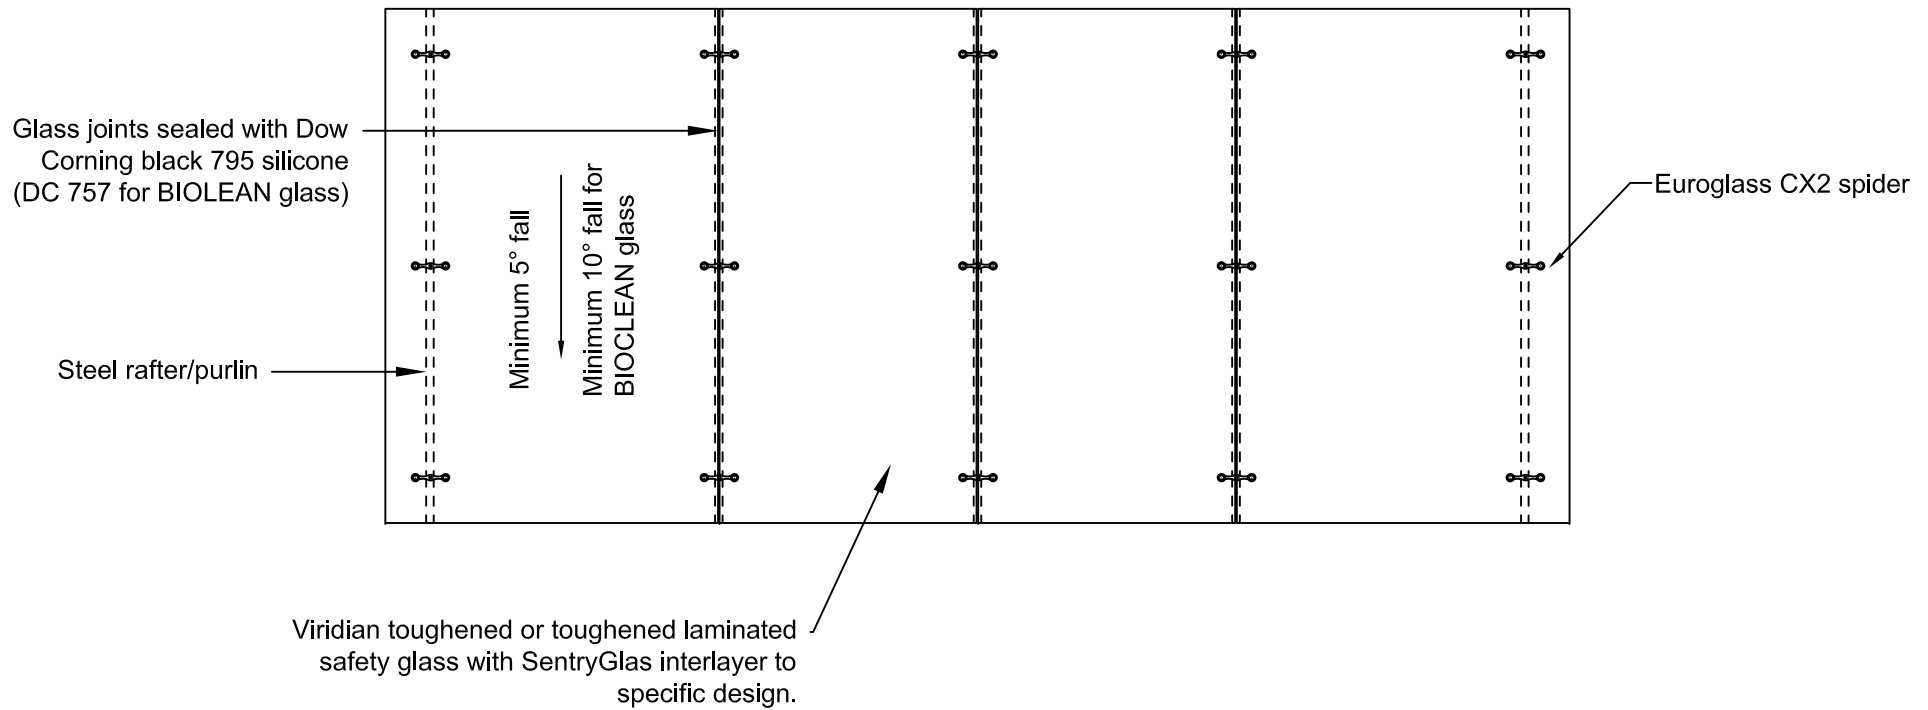


Allow toughened laminated glass if highest part of glazing is more than 5 m above finished floor level

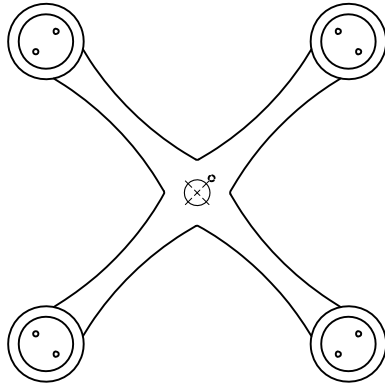


Euroglass CX4



Euroglass CX2



Euroglass CX1

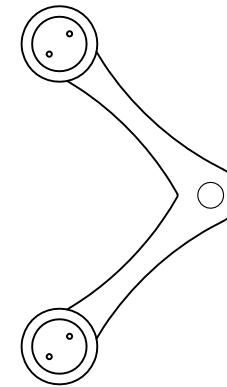

Euroglass CX2 90°

