

TEST REPORT

for

Speedfloor Ltd.
16B Ormiston Rd.
Auckland, New Zealand 2016
Hamish Coubray / 64 9 3034825

Impact Sound Transmission Test

ASTM E 492 – 09 (2016)e1 / ASTM E 989 – 18

On

**Speedfloor 8" (200mm) Joist Floor-Ceiling Assembly
Overlaid with 3-1/2 Inches (90mm) of Normal Weight Concrete,
and Porcelain Tile over 6mm AcoustiCork Underlayment
1.5"x2" Hat Channel, a Single Layer of 1/2 Inch Type C Gypsum Board**

Report Number: NGC 7020073_R1

Assignment Number: G-1631

Test Date: 06/02/2020

Report Reissue Date: 10/02/2020

Submitted by:


Anthony J. Rivers
Test Technician

Reviewed by:


Robert J. Menchetti
Director

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. This report may not be reproduced except in full, without written approval of the laboratory.

Revision Summary:

| Date | SUMMARY |
|---------------------------|---|
| Approval Date: 07/23/2020 | Original issue date: 07/23/2020 Original NGCTS report: NGC 7020073 |
| Reissue Date: 10/02/2020 | Report #: NGC 7020073_R1 The report was revised to fix a typographical error. |

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. This report may not be reproduced except in full, without written approval of the laboratory.

Report Number: NGC 7020073_R1

Page 3 of 5

Test Method: This test method is in accordance with American Society for Testing and Materials Standard Test Method for Laboratory Measurement of Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine - Designation: E 492-09 (2016)e1 / E 989-18.

The uncertainty limits of each tapping machine location met the precision requirements of section A1.4 of ASTM E 492-09 (2016)e1.

Specimen Description: Speedfloor 8" (200mm) Joist floor-ceiling assembly overlaid with, according to client, 3-1/2 Inches (90mm) of Normal Weight concrete, Porcelain Tile over 6mm AcoustiCork Underlayment, 1.5" x 2" Hat Channel and a layer of 1/2" Type C gypsum board.

The test specimen was a floor assembly and was observed to consist of the following:
All weights and dimension are averaged:

- 1 layer of, Porcelain Tile. The tile was adhered to the 6mm AcoustiCork underlayment using thin set mortar, and grouted with Spectralock Pro Grout. Measured thickness: 8.89 mm (0.35 in.). Measured weight: 19.43 kg/m² (3.98 PSF)
- 1 layer of, 6mm AcoustiCork underlayment. The underlayment was adhered to the concrete slab using Mapei Ultrabond ECO350 adhesive. The adhesive was applied using a 0.06 mm x 0.06 mm x 0.03 mm (1/16 in. x 1/16 in. x 1/16 in.) Square-Notch Trowel. Measured thickness: 6.10 mm (0.24 in.). Measured weight: 1.17 kg/m² (0.24 PSF)
- 1 layer of, 90mm (3-1/2 in.) Normal Weight concrete. Measured weight: 213.59 kg/m² (43.75 PSF)
- According to the client, Speedfloor 8" (200mm) joists. Measured weight: 6.01 kg/m² (1.23 PSF)
- 1.5" x 2 in. Hat Channel. The channel was spaced 406.4 mm (16 in.) o.c and was attached perpendicular to the joist. Measured weight of the channel: 0.82 kg/m² (0.17 PSF)
- 1 layer of 12.70 mm (1/2 in.) Type C gypsum board. The Gypsum board was attached to the Hat channel with 31.8 mm (1-1/4 in.) Type S screws spaced 203.2 mm (8 in.) o.c. Measured weigh: 9.28 kg/m² (1.90 PSF)

The overall weight of the test assembly is: 250.30 kg/m² (51.27 PSF)

The perimeter of the test frame was sealed with a rubber gasket and a sand filled trough.

The test frame was structurally isolated from the receiving room.

Specimen size: 3657.6 mm x 4876.8 mm (12 ft. x 16 ft.)

Conditioning: Minimum 24 hours at 70°F, 55% R.H

Test Results: The results of the tests are given on pages 4 and 5 of the report.

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. This report may not be reproduced except in full, without written approval of the laboratory.

| Normalized impact sound pressure level | | | | | | |
|--|---------------------|---------------------|-----------------------|------------|----------------|-----------------|
| Test: ASTM E 492 - 09 (2016) / ASTM E 989 - 18 | | | | | | |
| Test Report: NGC7020073_R1 | | | | | Date: 6/2/2020 | |
| Specimen Size [m²]: 17.8 | | | | | Page 4 of 5 | |
| Source room | | | Receiving room | | | |
| Rm Temp [°C]: 25 | | | Volume [m³]: 124 | | | |
| Humidity [%]: 50 | | | Rm Temp [°C]: 25 | | | |
| | | | Humidity [%]: 50 | | | |
| Impact Insulation Class IIC [dB]: 49 | | | | | | |
| Sum of Unfavorable Deviations [dB]: 30 | | | | | | |
| Max. Unfavorable Deviation [dB]: 4 | | | at 160 Hz | | | |
| Frequency [Hz] | L _n [dB] | L ₂ [dB] | d [dB/s] | Corr. [dB] | u.Dev. [dB] | ΔL _n |
| 80 | 67 | 66.5 | 31.12 | 0.5 | | 1.28 |
| 100 | 64 | 64.6 | 26.38 | -0.6 | 1 | 3.61 |
| 125 | 65 | 66.2 | 22.01 | -1.2 | 2 | 0.90 |
| 160 | 67 | 68.9 | 17.62 | -1.9 | 4 | 0.87 |
| 200 | 66 | 68.7 | 15.58 | -2.7 | 3 | 0.47 |
| 250 | 65 | 67.7 | 16.10 | -2.7 | 2 | 0.74 |
| 315 | 65 | 68.0 | 16.26 | -3.0 | 2 | 0.57 |
| 400 | 65 | 67.9 | 17.53 | -2.9 | 3 | 0.56 |
| 500 | 64 | 66.3 | 18.79 | -2.3 | 3 | 0.50 |
| 630 | 63 | 65.0 | 20.18 | -2.0 | 3 | 0.47 |
| 800 | 61 | 62.8 | 21.16 | -1.8 | 2 | 0.46 |
| 1000 | 60 | 61.8 | 19.86 | -1.8 | 2 | 0.39 |
| 1250 | 57 | 58.9 | 20.48 | -1.9 | 2 | 0.44 |
| 1600 | 50 | 51.6 | 21.39 | -1.6 | | 0.34 |
| 2000 | 44 | 45.0 | 24.15 | -1.0 | | 0.41 |
| 2500 | 45 | 45.6 | 26.86 | -0.6 | | 0.41 |
| 3150 | 44 | 43.8 | 30.05 | 0.2 | 1 | 0.55 |
| 4000 | 38 | 37.6 | 32.44 | 0.4 | | 0.69 |
| 5000 | 30 | 29.1 | 36.28 | 0.9 | | 0.80 |

L_n = Normalized Sound Pressure Level, dB
 L₂ = Receiving Room Level, dB
 d = Decay Rate, dB/second
 ΔL_n = Uncertainty for 95% Confidence Level

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agent of the U.S. Government. This report may not be reproduced except in full, without written approval of the laboratory.

1650 Military Road • Buffalo, NY 14217-1198
(716) 873-9750 • Fax (716) 873-9753 • www.ngctestingservices.com

Normalized impact sound pressure level


Test: ASTM E 492 - 09 (2016) / ASTM E 989 - 18

Page 5 of 5

Test Report: NGC7020073_R1
 Test Date: 6/2/2020
 Specimen Size [m²]: 17.8

Impact Insulation Class IIC [dB]: 49

| Frequency [Hz] | L_n [dB] |
|-------------------|---------------|
| 80 | 67 |
| 100 | 64 |
| 125 | 65 |
| 160 | 67 |
| 200 | 66 |
| 250 | 65 |
| 315 | 65 |
| 400 | 65 |
| 500 | 64 |
| 630 | 63 |
| 800 | 61 |
| 1000 | 60 |
| 1250 | 57 |
| 1600 | 50 |
| 2000 | 44 |
| 2500 | 45 |
| 3150 | 44 |
| 4000 | 38 |
| 5000 | 30 |

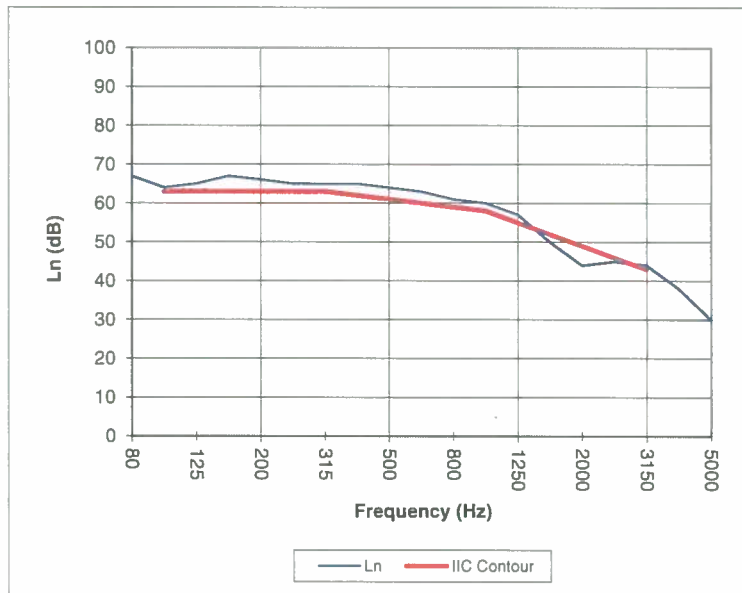

* Due to high insulating value of specimen, background levels limit results at these frequencies.

L_n = Normalized Sound Pressure Level, dB

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agent of the U.S. Government. This report may not be reproduced except in full, without written approval of the laboratory.