

TEST REPORT

for

Speedfloor Ltd.
16B Ormiston Rd.
Auckland, New Zealand 2016
Hamish Coubray / 64 9 3034825

Sound Transmission Loss Test

ASTM E 90 – 09 (2016) / E 413 – 16

On

**Speedfloor 8" (200mm) Joist Floor-Ceiling Assembly
Overlaid with 3-1/2 Inches (90mm) of Normal Weight Concrete,
and Porcelain Tile over 6mm AcoustiCork Underlayment
with Furring Channel, a Single Layer of 1/2 Inch Type C Gypsum Board**

Report Number: NGC 5020076_R1

Assignment Number: G-1631

Test Date: 06/25/2020

Report Reissue Date: 10/05/2020

Submitted by:


Anthony J. Rivers
Test Technician

Reviewed by:


Robert J. Menchetti
Director

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. This report may not be reproduced except in full, without written approval of the laboratory.

Revision Summary:

Date	SUMMARY
Approval Date: 07/24/2020	Original issue date: 07/24/2020 Original NGCTS report: NGC 5020076
Reissue Date: 10/05/2020	Report #: NGC 5020076_R1 The report was revised to fix a typographical error.

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. This report may not be reproduced except in full, without written approval of the laboratory.

Report Number: NGC 5020076_R1

Page 3 of 5

Test Method: This test method conforms explicitly with the American Society for Testing and Materials Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

Specimen Description: Speedfloor 8" (200mm) Joist floor-ceiling assembly overlaid with, according to client, 3-1/2 Inches (90mm) of Normal Weight concrete, Porcelain Tile over 6mm AcoustiCork Underlayment, Furring Channel and a layer of 1/2" Type C gypsum board.

The test specimen was a floor assembly and was observed to consist of the following:
All weights and dimension are averaged:

- 1 layer of, Porcelain Tile. The tile was adhered to the 6mm AcoustiCork underlayment using thin set mortar, and grouted with Spectralock Pro Grout. Measured thickness: 8.89 mm (0.35 in.). Measured weight: 19.43 kg/m² (3.98 PSF)
- 1 layer of, 6mm AcoustiCork underlayment. The underlayment was adhered to the concrete slab using Mapei Ultrabond ECO350 adhesive. The adhesive was applied using a 0.06 mm x 0.06 mm x 0.03 mm (1/16 in. x 1/16 in. x 1/16 in.) Square-Notch Trowel. Measured thickness: 6.10 mm (0.24 in.). Measured weight: 1.17 kg/m² (0.24 PSF)
- 1 layer of, 90mm (3-1/2 in.) Normal Weight concrete. Measured weight: 213.59 kg/m² (43.75 PSF)
- According to the client, Speedfloor 8" (200mm) joists. Measured weight: 6.01 kg/m² (1.23 PSF)
- Furring channel. The channel was spaced 406.4 mm (16 in.) o.c and was attached perpendicular to the joist. Measured weight of the channel: 0.73 kg/m² (0.15 PSF)
- 1 layer of 12.70 mm (1/2 in.) Type C gypsum board. The Gypsum board was attached to the furring channel with 31.8 mm (1-1/4 in.) Type S screws spaced 203.2 mm (8 in.) o.c. Measured weight: 9.28 kg/m² (1.90 PSF)

The overall weight of the test assembly is: 250.20 kg/m² (51.25 PSF)

The perimeter of the test frame was sealed with a rubber gasket and a sand filled trough.

The test frame was structurally isolated from the receiving room.

Specimen size: 3657.6 mm x 4876.8 mm (12 ft. x 16 ft.)

Conditioning: Minimum 24 hours at 70°F, 55% R.H

Test Results: The results of the tests are given on pages 4 and 5 of the report.

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. This report may not be reproduced except in full, without written approval of the laboratory.

Sound Transmission Loss Test Data							
Test: ASTM E 90 - 09 (2016) / ASTM E 413 - 16							
Test Report: NGC 5020076_R1				Date: 6/29/2020		Page 4 of 5	
Specimen Size [m²]: 17.8							
Source room				Receiving room			
Volume [m³]: 86				Volume [m³]: 124			
Rm Temp [°C]: 25				Rm Temp [°C]: 25			
Humidity [%]: 50				Humidity [%]: 50			
Sound Transmission Class STC [dB]: 55							
Sum of Unfavorable Deviations [dB]: 27							
Max. Unfavorable Deviation [dB]: 8				at 125 Hz			
Frequency	STL	L1	L2	d	Corr.	u.Dev.	ΔSTL
[Hz]	[dB]	[dB]	[dB]	[dB/s]	[dB]	[dB]	
80	36	100.9	67.6	30.1	2.8		2.92
100	29	103.0	77.5	25.2	3.5		5.81
125	31	102.9	76.1	18.9	4.3	8	0.98
160	38	105.3	72.5	16.5	5.2	4	2.25
200	42	105.3	68.4	15.7	5.2	3	0.85
250	47	102.5	60.8	15.9	5.3	1	1.70
315	47	99.9	58.3	15.8	5.3	4	0.77
400	48	99.1	55.5	17.4	4.5	6	0.56
500	54	99.8	50.7	19.3	4.9	1	0.79
630	57	100.8	47.7	20.6	4.0		0.58
800	60	99.8	43.5	21.0	3.7		0.34
1000	62	98.2	40.2	19.9	4.0		0.59
1250	67	96.5	34.2	20.4	4.7		0.67
1600	71	96.3	29.4	21.6	4.0		0.89
2000	74	99.0	28.4	24.5	3.3		1.02
2500	74	99.8	28.8	27.5	3.0		1.24
3150	76	99.0	25.0	30.5	2.0		1.36
4000	79	96.7	20.1	32.8	2.4		1.80
5000	80	89.1	10.9	35.8	1.8		2.11
STL = Sound Transmission Loss, dB							
L1 = Source Room Level, dB							
L2 = Receiving Room Level, dB							
d = Decay Rate dB/second							
Δ STL = Uncertainty for 95% Confidence Level							

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agent of the U.S. Government. This report may not be reproduced except in full, without written approval of the laboratory.

Sound Transmission Loss Test Data

Page 5 of 5

Test: ASTM E 90 - 09 (2016) / ASTM E 413 - 16

Test Report: NGC 5020076_R1


Test Date: 6/29/2020

Specimen Size [m²]: 17.8

Sound Transmission Class STC = 55 dB

Frequency [Hz]	STL [dB]	ΔSTL
80	36	2.92
100	29	5.81
125	31	0.98
160	38	2.25
200	42	0.85
250	47	1.70
315	47	0.77
400	48	0.56
500	54	0.79
630	57	0.58
800	60	0.34
1000	62	0.59
1250	67	0.67
1600	71	0.89
2000	74	1.02
2500	74	1.24
3150	76	1.36
4000	79	1.80
5000	80	2.11

* Due to high insulating value of specimen, background levels limit results at these frequencies.

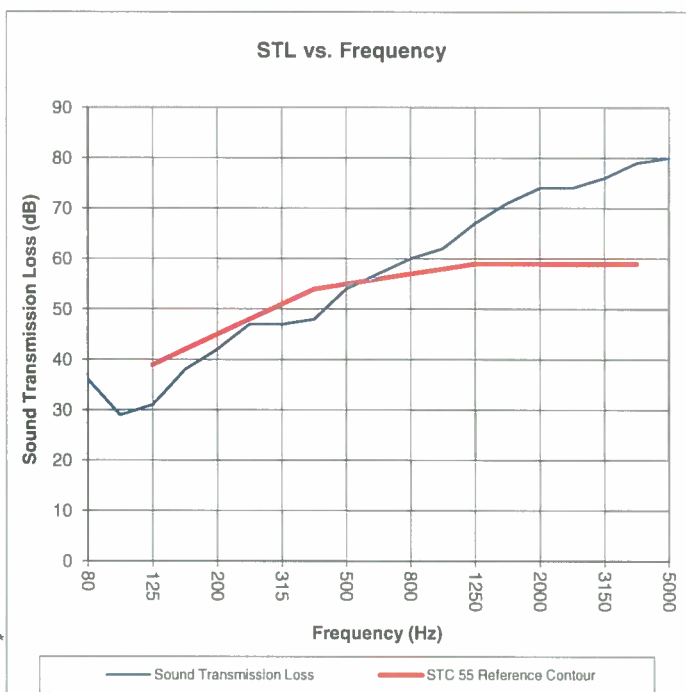

STL = Sound Transmission Loss, dB
 Δ STL = Uncertainty for 95% Confidence Level

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agent of the U.S. Government. This report may not be reproduced except in full, without written approval of the laboratory.