

HYGIENE AND TOUCHLESS SPECIFICATION GUIDE



Supplied by:

Mico Design

mico design

Adjusting to Change

As New Zealand and the rest of the world do our best to cope with this worldwide pandemic, the effects that Covid-19 have left us with have changed the way we look at everyday life.

The most important change is how we look at Hygiene and the precautions that should now be implemented.

From a Bathroom perspective this means looking at alternative measures that centralise around Touch Free, Hygiene friendly fixtures.

This includes:

- Sensor Tapware & Dispensers
- Antibacterial finishes
- Open rim Toilet Suites
- Knee / Foot operated Basins
- Integrated Touchless Wash Stations
- And many more Hands-Free products

This Hygiene & Touchless Specification Guide has been created to assist specifiers, by offering easy and quick referencing to a vast range of Bathroom products that are Hygiene orientated.





Table of Contents

SENSOR IAPWARE	4
SENSOR SOAP DISPENSERS	15
BASINS	
TOILETS	
URINALS	
ACCESSORIES	
WATER DISPENSERS	
FEATURE PRODUCT - ALAVO	68
AFFILIATED BRANDS	72
BRANCH LOCATIONS	73

mico design

The bathroom specialist

SENSOR TAPWARE

-mico design

Dolphin Thru Panel Mounted Inform Tap 90º Spout

DS101.130 - Brushed Satin SS 130mm projection, DS101.130.2 - Mirror Polished SS 130mm projection

736381 - Brushed Satin SS 180mm projection DS101.180.1, 736382 - Mirror Polished SS 180mm projection DS101.180.2

736387 - Brushed Satin SS 230mm projection DS101.230.1, 736388 - Mirror Polished SS 230mm projection DS101.230.2

736393 - Brushed Satin SS 280mm projection DS101.280.1, 736394 - Mirror Polished SS 280 projection DS101.280.2

Self-monitoring analysis and recording technology (SMART) allows the facilities manager to connect point to point via the Dolphin InForm App when used with the optional Bluetooth Adaptor (sold seperately - order product 25148)

Manufactured from high-quality durable 316 Marine grade stainless steel

Infared touch Free tap for ultimate hygiene, prevents cross contamination, sensor mounted end of spout

Designed to be mounted through an IPS panel for future servicing

Flow rate - 3.78L/M with the standard fitted flow regulator.

Water supply: single inlet cold or pre-mixed, a TMV2 or TMV3 thermostatic mixer is recommended for premix applications

Maximum operating temperature - 60degree C

Power Source:Plug in 9 Volt transformers

5 Different lengths, Brushed and Mirror finishes available

Also available with powder coating in any RAL colour (enquire for more detail)


















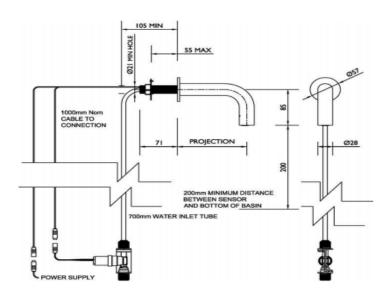



Dolphin Thru Panel Mounted Inform Tap 55º Spout

DS103.130.1- Brushed Satin SS 130mm projection, DS103.130.2 - Mirror Polished SS 130mm projection

736416 - Brushed Satin SS 180mm projection DS103.180.1, 736417- Mirror Polished SS 180mm projection DS10.180.2

736422 - Brushed Satin SS 230mm projection DS103.230.1, 736423 - Mirror Polished SS 230mm projection DS103.230.2

736428 - Brushed Satin SS 280mm projection DS103.280.1, 736429 - Mirror Polished SS 280 projection DS103.280.2 S

Self-monitoring analysis and recording technology (SMART) allows the facilities manager to connect point to point via the Dolphin InForm App when used with the optional Bluetooth Adaptor (sold seperately - order product 25148)

Manufactured from high-quality durable 316 Marine grade stainless steel Infared touch Free tap for ultimate hygiene, prevents cross contamination, sensor mounted end of spout

Designed to be mounted through an IPS panel for future servicing

Flow rate - 3.78L/M with the standard fitted flow regulator.

Water supply: single inlet cold or pre-mixed, a TMV2 or TMV3 thermostatic mixer is recommended for premix applications

Maximum operating temperature - 60degree C

Power Source:Plug in 9 Volt transformers

5 Different lengths, Brushed and Mirror finishes available

Also available with powder coating in any RAL colour (enquire for more detail)


















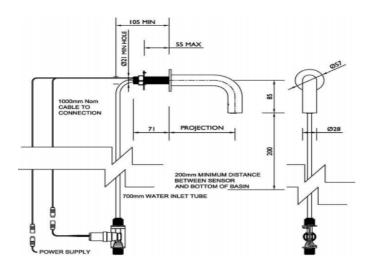



Dolphin Solutions Smart Application

The Dolphin Solutions Smart App allows the building owner, facilities manager or engineer to easily control and monitor Dolphin Smart products in the washroom.

Just from your phone or tablet it is now possible via this app to monitor the usage statistics of the Smart product including total number of uses, total water consumptions, average numbers of uses per day etc..., check the functionality and status of the product, and to quickly change settings to suit the specific environment, user type and installation and maintenance requirements.





- > Improving a building's efficiency with intelligent and measurable water management reporting
- > Water and eco management focused
- > Diagnosis data and usage statistics
- > Remote activation/de-activation and cleaning modes

Do your clients have bespoke requirements for washroom technology which will integrate with their BMS? Get in touch today to work with us in our development of this technology.

The Dolphin InForm Tap





















Dolphin Panel Mounted 220mm Electronic Infrared Tap - Long Series

726327 - Polished Chrome, Battery Powered, 726329 - Polished Chrome, Mains Powered 726343 - Matt Black - Battery Powered, 726344 - Matt black, Mains Powered

726326 - Brushed Satin - Battery Powered, 726328 - Brushed Satin, Mains Powered
Watermark & 6 Star WELS approved product. Touch Free Tap - for ultimate hygiene - prevents cross contamination

Matt Black, polished or brushed chrome or plated brass finishes available

Water Supply: Single inlet - cold or pre-mixed - a TMV2 or TMV3 thermostatic mixing valve is recommended for premixed applications

Flow rate - 3.8 litres/minute with our standard fitted flow regulator at any pressure between 0 and 6 bar Flow time once user's hands are removed from the tap - 1 second

Power Source: Plug-in 9 Volt transformers or 9 Volt Battery (with low battery warning)

2 year manufacturers warranty. Maximum water temperature 70ºC

Operating pressure 0.5 - 8.0 bar (7 - 116 PSI). Power Connections: tap female, power source male

Supplier Code: DBL400 - Battery Powered Supplier Code: DBL425 - Mains Powered












Polished Chrome

Brushed Satin

Matt Black







PLEASE NOTE: Dolphin recommends having access available to the fixing nut on the back of the tap for installation & ongoing maintenance. Maintenance of the tap solenoid and diaphragm should also be addressed every 6 months. Further details are provided in the maintenance booklet supplied with each sensor tap.



Dolphin Panel Mounted 170mm Electronic Infrared Tap

726323 - Polished Chrome, Battery Powered, 726325 - Polished Chrome, Mains Powered 726341 - Matt Black - Battery Powered, 726342 - Matt black, Mains Powered

726322 - Brushed Satin - Battery Powered, 726324 - Brushed Satin, Mains Powered

Touch Free Tap - for ultimate hygiene - prevents cross contamination, Quality polished or brushed chrome plated brass

finishes available from stock - other finishes available to special order

Water Supply: Single inlet cold or pre-mixed - a TMV2 or TMV3 thermostatic mixing valve

is recommended for premixed applications

Flow rate - 3.8 litres/minute with our standard fitted flow regulator at any pressure

between 0 and 6 bar (other flow rates such as 1.89 and 1.33 LPM available to special order - please enquire)

Flow time once user's hands are removed from the tap - 1 second (adjustable by using

remove control DB51). Interchangeable STD M22/24 Neoperl Aerator insert

Tap settings may be adjusted by using remote control (DB51)

Mandatory Hygiene Flush feature can be specified to combat Legionella, 2 year manufacturer's warranty Complies with SKA rating criteria

To special order we can supply a threaded tail extension kit

Supplier Code: DB400 - Battery Powered Supplier Code: DB425 - Mains Powered










Polished Chrome

Brushed Satin

Matt Black

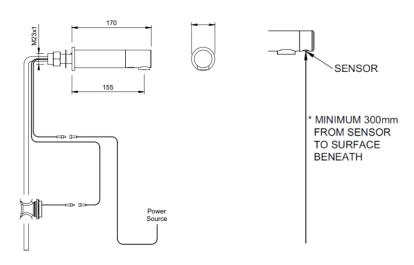

PLEASE NOTE: Dolphin recommends having access available to the fixing nut on the back of the tap for installation & ongoing maintenance. Maintenance of the tap solenoid and diaphragm should also be addressed every 6 months. Further details are provided in the maintenance booklet supplied with each sensor tap.



Raymor Commercial Touch-Free Electronic Basin Sensor Taps


729159 - Wall Mounted 729157 - Bench Mounted

6 Star 6lpm, Run time, sensitivity and dead flush are programmable by remote control
Extension leads available, Supplied with inlet strainer and flow controller
Digital Technology in sensor, IP rated control box enclosure houses the solenoid valve and waterproof connections
Battery or Mains options also available, (Can be changed after installation) Simple installation
Recommended for all projects. Supplier Code Bench Mounted STS1000Z, Wall Mounted STS2500Z














Presto Nova Single Deck-Mounted Sensor Tap Single Feed

734511 - with 230 VAC / 7 VDC Transformer - Chrome 734512 - Integrated 6V CRP2 lithium battery - Chrome 734513 - Integrated 6V CRP2 lithium battery - Matt Black

55391 - Integrated 6V CRP2 lithium battery - Chrome with Black Top Working pressure : 1 to 5 bar Flow : 3 I/min with integrated flow limiter

High quality anti-limescale aerator, Anti-water-hammering design > Hydraulic supply : G 3/8" (12x17)

Power supply: 230 VAC / 7 VDC transformer in IP65 waterproof case or Lithium battery


Material and colour finish: Injected molded metal body and cover Chrome finishing

Thermal resistance: Resistant to a temperature of 75°C for 30 minute thermal shocks Security: Temperature limiting system to avoid any risk of scalding Anti-overflow security time is set to 30 seconds, Anti-blocking system preventing the water to flow continuously. Delivered with: 1 Brass clamping nut, 1 Gasket and 1 Washer

2 PEX Hoses with revolving nuts and NF check valves 2 MM G 3/8" (12x17) Stop valves

2 Filter gaskets, 1 Self-adhesive sticker, Instruction manual. Standards & approvals : Molded chrome-plated body in accordance with EN 12540. Brass in accordance with NF EN1982, EN12164, EN12165 200-hour neutral salt spray resistant (NSS) in accordance with NF ISO 9227

Note: Matt Black and Chrome with Black Top only available in Battery models

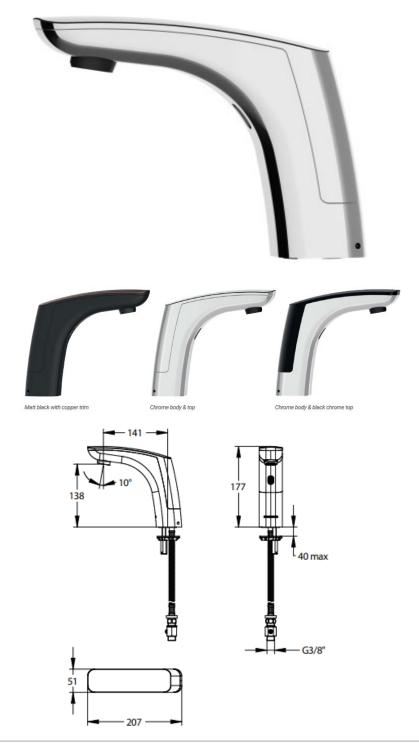

Dolphin Electronic Infrared Tap DB840 - Battery / DB845 - Transformer

Flow rate 3.8 litres/minute with our standard fitted flow regulator at any pressure between 0 and 6 bar (other flow rates available to special order please enquire)

Flow time once user's hands are removed from the tap 1 second (adjustable by using remote control DB51) 3/8" BSP water supply connector

Tap settings including optional hygiene flush can be adjusted by using remote control (DB51)

Mandatory Hygiene Flush feature can be specified to combat Legionella

2 year manufacturer's warranty, Complies with SKA rating criteria


We recommend our Dolphin Blue DB61 TMV3 be used in conjunction with this Dolphin Blue tap Our low flow taps are fully BREEAM compliant and contribute to up to five BREEAM WAT 1 credits

Power Source: Plug-in 9 Volt transformers or 9 Volt Battery (with low battery warning)
Power connections: tap: female / power source: male

Maximum water temperature 70°C, Operating pressure 0.5 - 8.0 bar (7 - 116 PSI)
Counter Hole: diameter 28-34mm, Minimum/maximum thickness: 2-27mm



PLEASE NOTE: Dolphin recommends having access available to the fixing nut on the back of the tap for installation & ongoing maintenance. Maintenance of the tap solenoid and diaphragm should also be addressed every 6 months. Further details are provided in the Maintenance booklet supplied with each Sensor Tap.



Dolphin Blue Electronic Infrared Tap Deck Mounted

726334 - Battery Powered - Brushed Satin, 726336 - Transformer Powered - Brushed Satin 726335 - Battery Powered - Polished Chrome, 726337 - Transformer Powered - Polished Chrome 726347 - Battery Powered - Matt Black, 726348 - Transformer Powered - Matt Black

Touch Free Tap - for ultimate hygiene - prevents cross contamination

Quality polished or brushed chrome plated brass finishes available

Water Supply: 3/8 inch single inlet cold or pre-mixed - a TMV2 or TMV3 thermostatic mixing valve is recommended for premixed applications. Flow rate - 3.8 litres/minute with our standard fitted flow regulator at any pressure between 0 and 6 bar. 2 year manufacturer's warranty

Max water temperature 70°C, Operating pressure 0.5-8.0 bar (7-116 PSI) Very low energy usage. We recommend our Dolphin Blue DB61 TMV3 be used in conjunction with this Dolphin Blue tap. Power connections: soap dispenser: male / power source: female minimum distance between sensor and the bottom of basin = 300 mm










Polished Chrome

Brushed Satin

Matt Black



PLEASE NOTE: Dolphin recommends having access available to the fixing nut on the back of the tap for installation & ongoing maintenance. Maintenance of the tap solenoid and diaphragm should also be addressed every 6 months. Further details are provided in the maintenance booklet supplied with each sensor tap.




Dolphin Blue Behind Mirror Infrared Tap 726349

Touch free electronic behind mirror tap
Power Supply 9V transformer
Operating pressure 0.5-8.0 bar / 7.0-116.0 PSI
Water supply Cold or premixed water
Water flow 6 LPM / 1.58 GPM - SSR PCA stream
Water temperature 70ŰC Maximum
2 year manufacturer warranty
We recommend our Dolphin Blue DB61 TMV3 be used in conjunction with this Dolphin Blue tap



PLEASE NOTE: Dolphin recommends having access available to the fixing nut on the back of the tap for installation & ongoing maintenance. Maintenance of the tap solenoid and diaphragm should also be addressed every 6 months. Further details are provided in the Maintenance booklet supplied with each Sensor Tap.

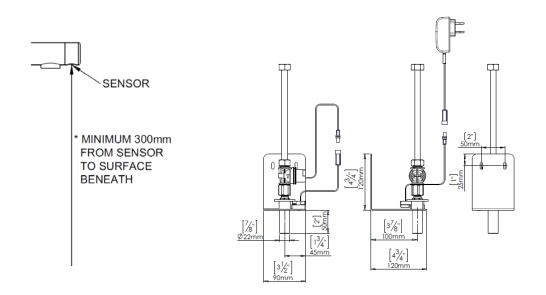



SENSOR SOAP / SANITISER DISPENSERS

-mico design

Dolphin Panel Mounted Infrared Foam Soap Dispenser 726368 - BCL632FC Polished Chrome Plate, 728433 - BCL632FS-2 Brushed (Satin) Chrome Plate 726402 - BCL632FB - Black Finish 726376-Elements Luxury Foaming Soap 5L*PLEASE NOTE -(MUST BE USED WITH FOAMDISPENSER)

Integral peristaltic pump prevents backflow ensuring a germ free environment and, in conjunction with the touch free operation, eliminates the risks of contamination. Soap and air settings can be adjusted to personalise soap 'foamability' via a remote control which easy to use and designed for the janitor or client to use (DB53). One of these is supplied FOC with every 6 dispensers or can be purchased separately. Sensor settings (range etc) can be adjusted with a separate remote control - this is a more complex unit and designed more for maintenance staff to use (DB52)

Available in high quality polished chrome (BCL632FC) or brushed satin (BCL632FS-2)

finishes on solid brass construction with other finishes available on request Panel mounted it includes a 1 litre foam soap bottle, integral bottle support and fixing kit

Designed to match Dolphin Blue DB400 and DB1400 series taps. Power connections: soap dispenser: female / power source: male. Draws maximum current of 0.5A at sensor activation 2 year guarantee. Powered by 12v Transformer; a 3pin version is supplied complete with each dispenser. Convenient, quick and Highly economical - Foam soaps use less product with the same result.



A Dolphin Wall Mounting Plate is available if fixing cant be achieved from back of wall










Polished Chrome

Brushed Satin

Matt Black

*Please Note: Dolphin Luxury Foaming Soap must be used to ensure correct function of the soap dispenser.



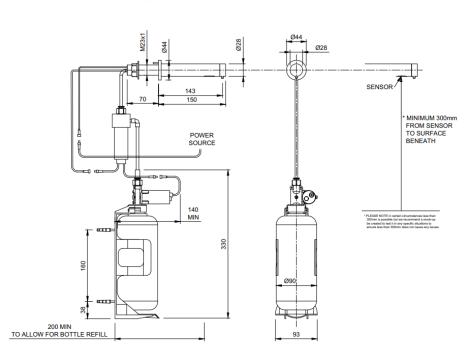



Dolphin Counter Mounted Foam Soap Dispenser BC633FC Dolphin Foam Soap Dispenser in Polished Chrome BC633FS Dolphin Foam Soap Dispenser in Satin Chrome 726376 - Luxury Foam Refill 5L

Hands free for ultimate hygiene stainless steel infrared soap dispenser. Manufactured from chrome plated brass Brushed satin and mirror polish finishes available. Powder coating also available - contact us to enquire

1000ml capacity - bulk fill. Also available for liquid soap - see BC633.Complies with the following certifications;


Doc M BC633FC Polished chrome finish


BC633FS Brushed Satin finish





*Please Note: Dolphin Luxury
Foaming Soap must be used
to ensure correct function of
the soap dispenser.

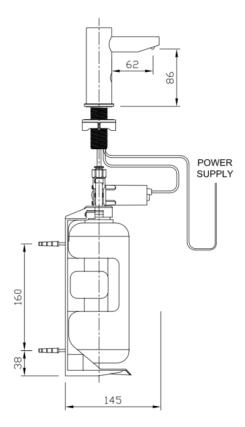



Dolphin Foam Soap Cartridge Multifeed System DS800


726376 - Elements Luxury Foaming soap 5L

Multifeed system can supply up to 8 foam soap dispensers
Compliant with WELL v2 2018 by International WELL Building Institute. W08 Handwashing, Part 2A
Pending UK Patent. Application No. 1314060.3. Uses 3.5 litre cartridges - 10,000 shots approx. per cartridge AL0467
For mounting under counter, behind hinged mirrors, in service duct or within cleaner's cupboard
2 litre reservoir (fixed collapsible container to continue supplying dispensers when cartridge finishes)
Compatible with BCL632F, BC1022F, BC1032F, BC633F, BC637F, ALS0300
Requires DS800PIPEWORK for multifeed installation (1 per soap position)












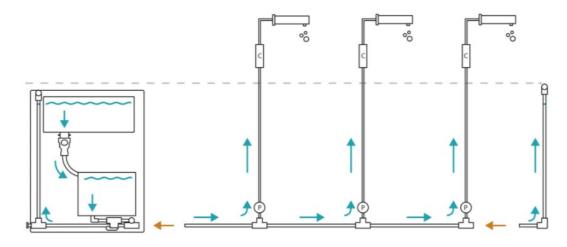

Dolphin Panel Mounted Infrared Liquid Soap Dispenser
726372 - BCL632C Polished Chrome Plate, 726373 - BCL632S-2 Brushed (Satin) Chrome Plate
726401 - BCL632B Black Finish

BCL632C-BTRY Polished Chrome Plate -Battery Powered, BCL632S-2-BTRY Brushed (Satin) Chrome Plate -Battery Powered 729466 - Luxury Soap Refill 5L Electronic soap dispenser activated by an infrared sensor

Soap Drop Portions: 0.7-0.9ml per drop portion (this is adjustable and depends on viscosity of soap)
High quality polished chrome or brushed nickel-finish brass construction, Soap Container - 1,000ml
2 year guarantee, Powered by 9v Transformer, Wall Mounted, Designed to match Dolphin Blue DB400 and DB1400 range taps,
Settings can be adjusted with a remote control (DB52). Power connections: soap dispenser: female / power source: male Draws
maximum current of 0.5A at sensor activation



A Dolphin Wall Mounting Plate is available if fixing cant be achieved from back of wall










Polished Chrome

Brushed Satin

Matt Black

*Dolphin 5L Soap Refill



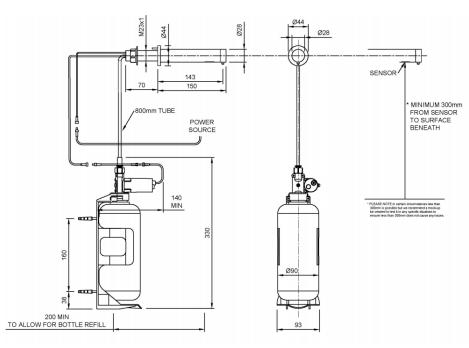




Dolphin Counter Mounted Liquid Soap Dispenser BC633FC Dolphin Soap Dispenser in Polished Chrome BC633FS Dolphin Soap Dispenser in Brushed Satin Chrome 729466 - Luxury Soap Refill 5L

Soap Dispenser - Electronic foam soap dispenser activated by an infrared sensor. When the user places his hand within the sensor range, the soap dispenser delivers the foam soap. A big improvement in soap dispenser foaming soap drastically reduces soap consumption when compared to standard liquid soap. Integral peristaltic pump prevent backflow ensuring a germ free environment and, in conjunction with the touch free operation, eliminates the risks of contamination. Soap and air settings can be adjusted to personalise soap 'foamability' via a remote control which easy to use and designed for the janitor or client to use (our DB53). 1 of these is supplied FOC with every 6 dispensers or can be purchased separately. Sensor settings (range etc) can be adjusted with a separate remote control - this is a more complex unit and designed more for maintenance staff to use (our DB51)

Counter mounted it includes a 1 litre foam soap bottle, integral bottle support and fixing kit





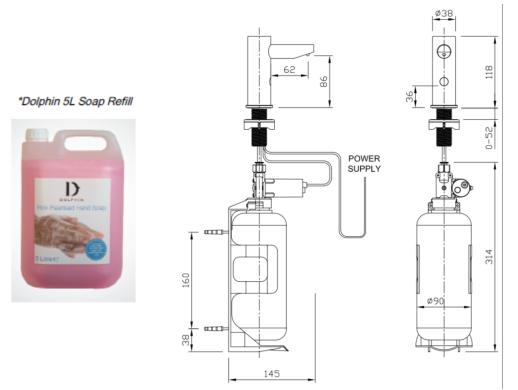

Dolphin Top Fill Multifeed Soap System BC6300TF

729466 - Luxury Soap Refill 5L

Dolphin's Multifeed Top filling soap dispenser kit is the ideal solution for heavy usage areas.

The multifeed system supplies up to 6 soap dispensers simultaneously. Includes 5 Litres soap container. Top filling mechanism with anti-theft cover - no need to remove the container from below the counter. Lockable top button in high quality chrome plated finish.


Can be used with wall and deck mounted Dolphin soap dispensers.


Multifeed soap dispenser kit is simple, clean and quick to install. Helps to ensure that the bathroom stays organized, neat and provides a germ free and automated environment.

Perfect combination with Dolphin's electronic faucets and soap dispensers lines.

The following functions can be performed by using remote control: Soap dosage selection, refill the soap tank, temporary off, return to factory settings.

Easy to Install, High Quality PVC Clear Tubing. 5 Litre soap Container. Dispensers not included, please order separately

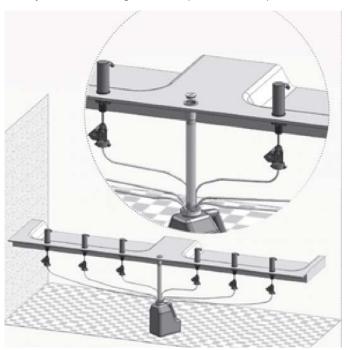

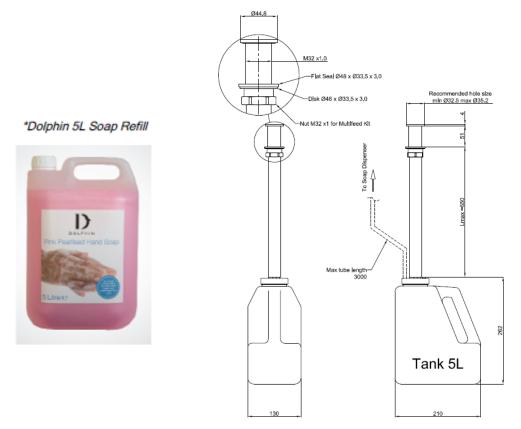

Dolphin Infrared Automatic Hands Free Foaming Soap Dispenser 726354 - Soap Dispenser 726376 - Elements Luxury Foaming Soap 5L *(MUST BE USED WITH DISPENSER)

Quality stainless steel construction, Lockable

Automatic touch free foaming soap dispenser - ultra hygienic

Very economical cost in use - uses as little as 0.6ml of soap per cycle - less than half most traditional liquid soap dispensers, Requires 4 x 1.5V C batteries for estimated 25,000 shots


Must be fitted at least 300mm above basin, Low voltage LED indication, Not suitable for use in shower areas USES FOAMING SOAP ONLY

BC950F



*Please Note: Dolphin Luxury Foaming Soap must be used to ensure correct function of the soap dispenser.








Dolphin Satin Stainless Steel Behind Mirror Automatic Foam Soap Dispenser 726394-Soap Dispenser

726376 - Elements Luxury Foaming Soap 5L *PLEASE NOTE: TO BE USED WITH DISPENSER)
Behind mirror, drop down, automatic foam soap dispenser - stainless steel. Usage: Medium Traffic Areas
Finish: Brushed Satin Stainless Steel, Soap Capacity: Approximately 800ml
Delivery per activation: 0.6ml-0.8ml. 06.0160



*Please Note: Dolphin Luxury Foaming Soap must be used to ensure correct function of the soap dispenser.



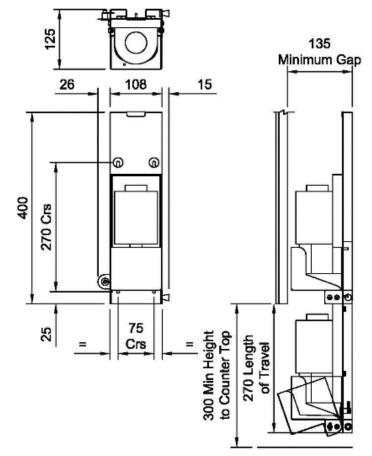

Dolphin Infrared Sensor Liquid Soap or Hand Sanitiser Dispenser BC950-For Standard Soap 729466 - Luxury Soap Refill 5L


Touch free for ultimate hygiene, Manufactured from cast 304 grade stainless steel. Brushed satin finish. Powder coating also available - contact us to enquire. Lockable950ml capacity - bulk fillRequires 3 x C batteries for estimated 10,000 shots Must be fitted at least 300mm above basin. Low voltage LED indication Not suitable for use in shower areas

Doc M Compliant



*Dolphin 5L Soap Refill



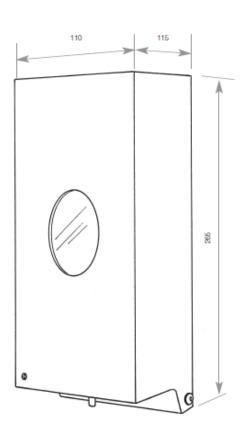



Dolphin Prestige Touch Free Soap Dispenser - Behind Mirror

DP1510

Touch Free liquid soap dispenser, Stainless steel construction, For mounting behind fixed mirrors 950 ml refillable soap bottle, Battery-powered with two 1.5 V LR14 batteries.


Power supply available as an option. Wear parts can be replaced as modules.

Mounting: With two screws through key holes and one optional anti-theft hole in the back wall. Depth of substructure installation: min. 185 mm Height above vanity unit: min. 250 mm



*Dolphin 5L Soap Refill



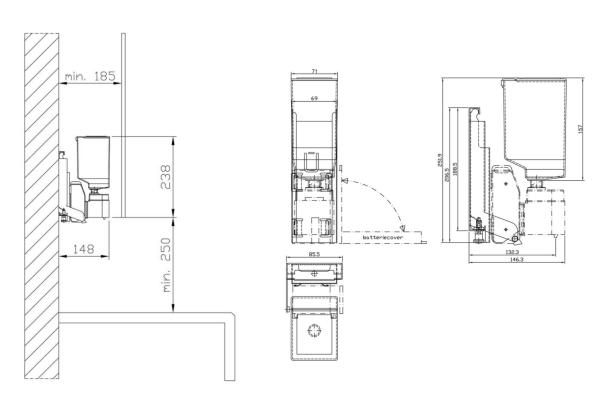

Dolphin Excel Touch Free Plastic Soap Dispenser B950P


729466 - 5L Bulk Soap Refill

High impact white plastic ABS construction. Lockable. Bulk fill - 800ml capacity, 1 ml of soap per shot approximately Automatic touch free dispensing - ultra hygienie, Requires 6 x AA batteries for estimated 17,000 shots Low voltage LED indication. Not suitable for use in shower areas. Uses Standard Liquid Hand Soap, Anti Bacterial Soap and Alcohol Hand Sanitiser (max 70% alcohol content)



*Dolphin 5L Soap Refill



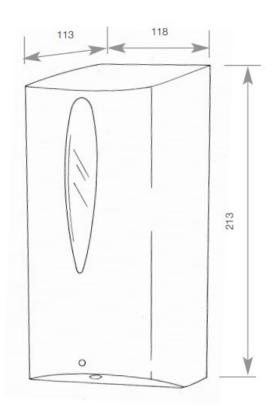



Dolphin Hand Sanitiser Sign and Dispenser - Liquid Bulk Fill \$8301

Please enquire for Lead time. Hand Sanitiser Point composite back board
BC233W Dolphin Excel Bulk Fill Dispenser - Liquid. 1 litre tank with Lid. 1ml Lotion Pump - 1000 dispenses per
1000ml refill Interchangeable pumps and containers
For use with Alcohol sanitizers or gels (up to 70% alcohol content), before and after work creams.
High quality ABS. Keyed Dispenser. Size 420 h x 297 w mm
Manufactured in the UK




297	7	
		420

Dolphin Bulk Fill Lotion Dispenser

Please enquire for Lead time. Bulk 1 litre tank with Lid. Interchangeable pumps and containers
Print options. Manufactured in the UK. Coloured window options For use with Perfumed/Unperfumed hand lotion soap; Anti bac Soap; before and after work creams, sun creams; Alcohol sanitizers or gels(up to 70% alcohol content); Grit or beaded soaps

Alternative metal arm for hands free applications - BC233FLX-ELB. BC233FLX is a replacement for product code

BC123. High quality ABS. 1ml Lotion Pump - 1000 dispensers per 1000ml refill Keyed Dispenser. Stylish Design

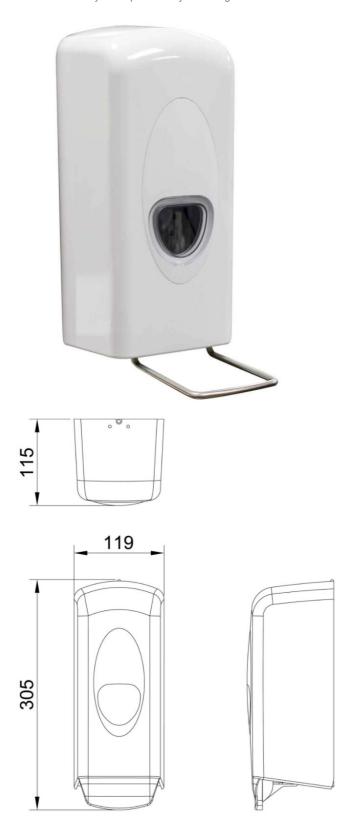



Dolphin Stand with Hands Free Bulk Fill Dispenser and Drip Tray \$\$206

Please enquire for Lead time

Ideal Sanitising stand for reception areas, store entrances, building entry points

Stand made from stainless steel for durability

now with integral stainless steel drip tray to catch any residue Includes BC233W-ELB Liquid Bulk Fill Dispenser, with hands free metal arm

For use with Alcohol sanitizers or gels(up to 70% alcohol content); Perfumed/Unperfumed hand lotion soap; Anti bac Soap; before

and after work creams, sun creams; Grit or beaded soap

1ml Lotion Pump - 1000 dispenses per 1000ml refill

Made in the UK

Keyed Dispenser

Stand Dimensions - Height: 1350mm, Base: 390 w mm x 420 d mm



Dolphin Wall Mounted Sanitiser Station

SS401

Touch-Free Hand sanitising station for public areas and offices
Corian construction for durability and maintenance Range of Corian Colours, Touch Free Foam Sanitiser Dispenser. Battery or transformer options 3.5Ltr Cartridge Sanitiser system 10,000 doses. Plug and play rapid replenishment system Lockable door for replenishment Width 450 MM, Height 330 MM, Depth 270 MM





BASINS


-mico design


BASIN

Accessible Basin LH & RH Shelf Options SANH710BLT - Left Hand SANH710BRT - Right Hand Complies with AS1428.1

Unique, rear offset location of drain to eliminate outlets reaching over waste Sloped surfaces to prevent bacteria growth in stagnant puddles Can support up to 150kgs. Accessible clearance. Easy installation Underside of bowl is glazed for easy cleaning Life-long, anti-microbial technology in coating for infection control Recommended for use in health and aged care projects



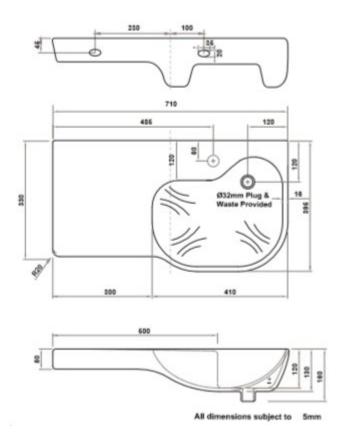

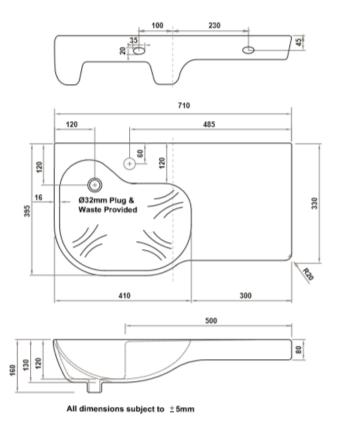


BASIN

Wall Mounted Basin 560mm

SANH560B
Unique, rear offset location of drain to eliminate outlets reaching over waste Sloped surfaces to prevent bacteria growth in stagnant puddles Support up to 150kgs. Accessible clearance. Easy installation
Underside of bowl is glazed for easy cleaning Life-Long, anti-microbial technology in coating for infection control Recommended for use in Health and Aged Care projects



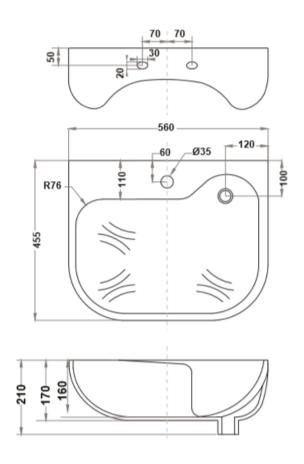



BASIN

Hands Free, Knee Operated Basin HFB1

The HFB1 Hands Free, Knee Operated Basin is a wall mounted unit that is designed to be operated using your knee so there is no need to touch taps, reducing the risk of cross contamination or infection.


The unit is made from 304 grade stainless steel, has a 40mm stainless steel waste outlet and is mounted using


concealed wall brackets from rear keyhole fixing points.

It is supplied pre-plumbed with wall brackets, goose neck spout and the pressure limiting valve.

The HFB1 is for use in applications such as health care & medical facilities, food preparation, and other areas where you require the ability to wash hands without touching taps.



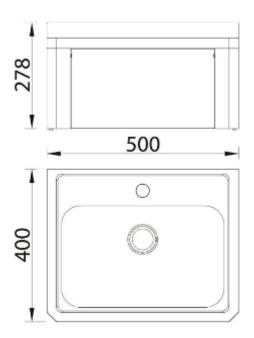

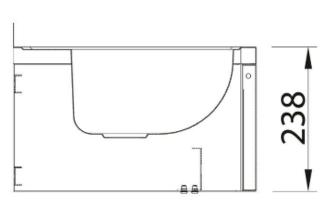


WASHBASIN


Stoddart Plumbing WB.KO3 Wash Basin - Knee Operated WB.KO3

Stoddart designed and introduced the Knee Operated Wash Basin with the full front knee operated panel to provide easy access to hygienic hand washing. This commercial kitchen unit comes with an integrated stainless steel splashback with bevelled top to comply with the health and plumbing requirements. Integrated splashback allows for wall mount without need to run pipe in wall. The most popular option for kitchens has a tempering valve pre-fitted to provide comfort and improved cleaning. With the optional tempering valve, this basin meets AS 4674 for the design, construction and fit out of food premises.





PLAN VIEW



88 290 END VIEW




WASHBASIN


Acero G4 Hand Wash Basin G4PK1

he G4 hand wash basin is Made in New Zealand by Acero.

It is pressed from 0.9mm 304 grade stainless steel and comes standard with 40mm plug and waste and two mounting brackets. Tap hole is optional and available on request.







TAPWARE


Presto Foot Valve

SOL520

The new pedal is twice as resistant to shocks as a conventional pedal.

It is more resistant to solvents or liquids found in industrial environments or professional kitchens Dark colour provides a greater visual contrast with the floor avoiding the potential risks or accidents
Single pedal foot operated tap for wall or floor floor fixing, 4 seconds timed flow
Slow timed closure avoids water-hammering Hot or cold water. Model: 23614



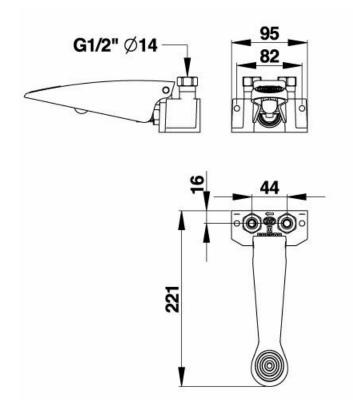

TAPWARE


Knee Operated Lever Presto 712

390mm total length, Longer versions available on request 15 sec time flow. Right angled version available (712A)

Available with basin mounted swivel spout 150mm (712/sp020)

Reference number: 31683



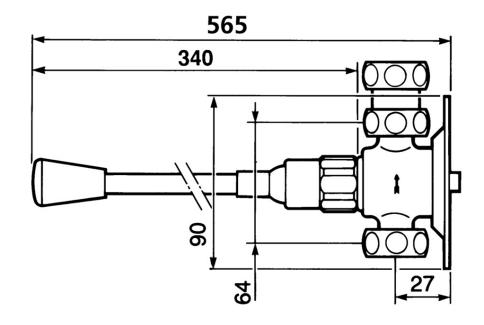

SINK

Stoddart Mobile Freestanding Wash Stations

WB.MSSC - Premium / Self Contained Water Feed WB.MSMF - Premium / Mains Fed

WB.MSSC.G - Budget / Self Contained Water Feed WB.MSMF.G - Budget / Mains Fed

Stainless steel mobile hand washing basin with tap and stand included. Hands free foot operation for hygienic hand washing.

No power connection required, two options for water supply and drainage.

Self contained (SC) models include two 20 litre on board jerry cans, one for clean water and one or waste water.

Water is fed using a foot operated pump

Mains fed (MF) models include a mains connection and connection for drainage to a suitable drain.

Water is fed by a foot operated valve. Premium models - cabinets are fabricated from heavy duty, aesthetically pleasing and durable stainless steel. They include a fully enclosed cupboard and back panel to conceal plumbing/ fittings plus rear handle and castor's making the unit easy to reposition

Budget (.G) models - stands are fabricated from galvanized steel. They are an open base which houses visible plumbing and do not include the rear handle and castor's





TOILETS / URINALS

-mico design

SENSOR WC FLUSH VALVE

Zurn WC Flush Valve with Push Button Overide ZEMSS-6152XL-with over ride button ZA-EMSS - 342x342mm Access Panel - (if no remote access)


Zurn Model ZEMS-6152XL flush valve is a sensor activated toilet flushing valve with an approved vacuum breaker allowing direct connection to potable water supply without any additional backflow protection. The standard valve is pre-set to deliver a 6L flush and has achieved the distinction of Australian Standards Watermark approval and WELS 1 Star rating. Valve upgradable to 4.5L flushing should regulations permit. Sensor initiates full flush only after user is within sensor range for more than 8 seconds and then leaves sensor range. Valve is also available with auxiliary manual push button as the Model ZEMSS-6152XL.

Pipework design is critical to correct valve operation and must be completed by a suitably qualified person.

Mount valve in a appropriately sized duct space (see drawing above). 342mm x 342mm stainless steel access panel available should full duct access not be available. Sensor supplied with 6VDC plug pack transformer and solenoid actuator. Flow rings supplied with the valve allow the installer to increase the flush volume to either 9 or 12 litres if required. This can be useful when older pans or Asian squat toilets are installed (WELS 0 Star rated). In order to comply with approvals is not possible to remote mount this valve and extend any pipework.

SPECIFICATION Suitable for connection to 6 litre back entry pans Minimum Pressure: 150kPa Maximum Pressure: 500kPa Flow Rate: 90L/min Inlet Connection: 25mm BSP Flush Volume: 6L



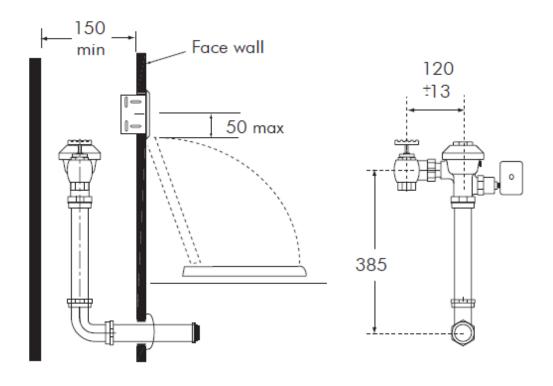

SENSOR FLUSHING

Zentih Flushmaster 617729

Electronically controlled cistern outlet valve designed to convert a single flush cistern to an electronically controlled dual or single flush system.

Also fits 6/3 and 4.5/3 litre flat base existing cisterns Suits restricted mobility or grey water Washrooms

75mm diameter outlet valve. Compatible stainless steel cisterns available Converts chain-pull, push-button or auto syphon operational systems.

Can be set to operate up to 9 seconds with adjustments in 1 second increments.

1 second equivalent to 1 litre.

Uses two touch-free infrared sensors which have been modulated to activate when a users hand is within 50mm to 75mm of the sensor.

Sensors are remotely mounted to allow for easy operational access.















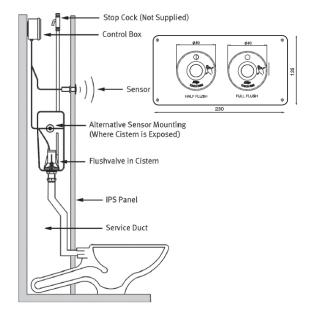

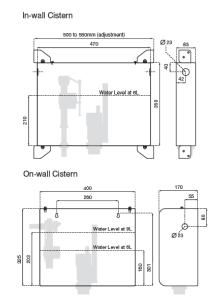

WC SENSOR FLUSH & INWALL CISTERN

Envirotech ET4-40 Toilet Sensor Plate & Cistern ET4-40

Concealed in wall, sensor operated, 4 star, toilet cistern, brings class to non touch bathroom technology. Featuring clean lines and a stunning glass LED finish it leads the way with superior, patented technology and construction. Australasian exclusive, manual over ride makes this toilet flush system suitable for apartments, homes and hotels as well as the usual commercial facilities.

Electronic Sensor Activated Toilet Flush with in wall cistern.

Stunning LED and Glass display, Front access

Hands Free sensor dual flush

4 star WELS water rating Hand swipe sensor activation , Additional automatic activation if flush is forgotten
Manual over ride function , Automatic 72 hour 1/2 flush for hygiene
Superior strength frames , Dual Flush


AC power transformer included

4 STAR WELS water rating, Accessible Standards Approved








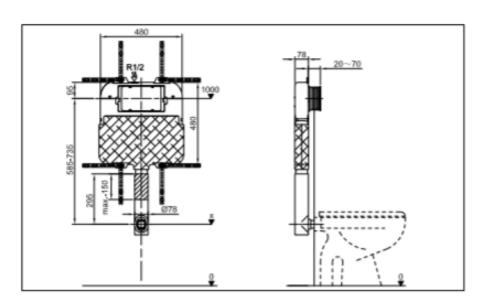

Adesso Edge Wall Faced Pan and Seat 711614 - Pan
708962 - Seat
736372 - Commercial Toggle for Seat
Features Box rim, WDI inlet valve, Floor fixing kit - valance bend
P Trap set out 185mm, S Trap set out 75 115mm



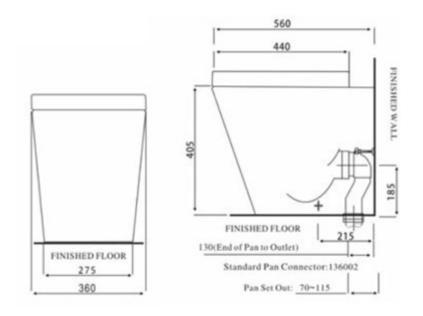

Kohler Veil Wall Hung Intelligent Toilet

Veil wall hung toilet with integrated bidet.

In wall cistern - Hydro tower 500 (4.5/3L). Touchless flush button panel. Wireless one touch remote. Waste pipes (S & P trap) & straight inlet connection pipe. Wall fixing bolts. Toilet Features Touchless flush button panel in Honed White. Ergonomic French curve seat with antibacterial material. Sensor activated auto open and close function for seat lid. Insulated in-wall cistern - fully framed. Automatic, touchless or manual Dual flush (4.5/3L). Built in LED night-light. Deodoriser function. Back up shut-off valve located on cistern. Rimless pan design.

Built in LED night-light. Deodoriser function. Back up shut-off valve located on cistern. Rimless pan design.


Vitreous china. Bidet Features Instantly heated water with stainless steel wand. Spray wand features adjustable water pressure and temperature, and oscillate and pulsate functions. Air blower and heated seat with adjustable temperature. Self-cleaning and UV sanitising nozzle









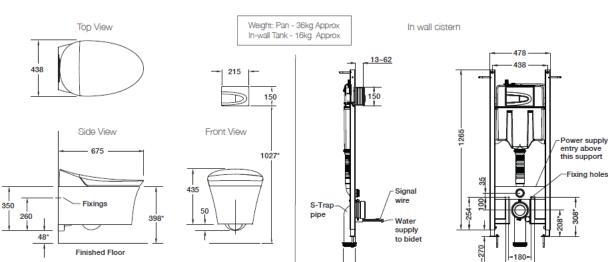


^{*} Nominal dimensions based on in-wall tank being installed at designated height. This height can be adjusted to suit user preference.





Adesso Mila Classic Back to Wall Toilet Suite with Hygiene Flush By American Standard 722330 - Bottom Inlet 722324 - Back Inlet

Vitreous China finish, Antibacterial quick release and soft close toilet seat, Hygiene Flush (Rimless Technology)
Recommended for domestic, hotel and commercial use, Available with back or bottom water inlet
4.5/3 dual flush, WELS Rating 4, Adjustable set out from 140-260mm










Adesso Mila Comfort Height II Rimless Toilet Suite Back Inlet


739250


Vitreous China finish, With Hygiene (Rimless Technology), Antibacterial Glaze including the seat Slim soft close seat, 10 year warranty conditions apply Recommended for domestic, hotel and commercial use Dual Flush 4.5L full flush, 3.0L half flush, 4-Star WELS rating Adjustable set out from 140-260, Comfort Height Pan



SPECIFICATIONS







URINAL SENSOR

Raymor Commercial Electronic Infrared Urinal Flushing System


Adapted to heavy use locations. Compact ceiling installation avoids problems with vandalism.

Sensitivity easily adjustable. Flush time easily adjustable. Automatic hygiene flush function available (every 6 hours)


Material: Plastic Solenoid Valve, Flush Duration: 1-20 seconds (Adjustable) Passive Type of Detection: Infrared
Power consumption: 900 mA (Mains Power only), Sensitivity: Up to 5 meters (1400mm cable)

Valve: 12 Volts Solenoid (2800mm cable)


5 Star, 0.9 Lpm 1-Year Warranty WELS: U00393 Supplier Code PLUS6000

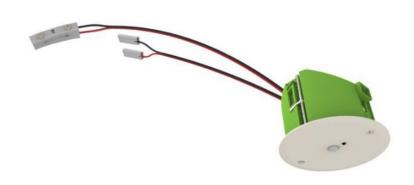






3m Ceiling Detection Range



Measurements to be used an approximate guide





PLUS9010 Solenoid only to suit PLUS6000/PLUS6100

PLUS9011 Power transformer only to suit PLUS6000/PLUS6100

PLUS6000-P Electronic infrared Urinal flush- Electronic Urinal Flushing

System Ceiling sensor.




URINAL

Adesso Urinal Rear/Top Inlet

Rear Inlet - 726218 Top Inlet - 726219

Includes fixings and inlet connection, Features integrated trap, 5 Star WELS water rating (1 litre flush)
Rear Inlet urinal requires concealed urinal flush valve, Top Inlet urinal requires top inlet flush valve



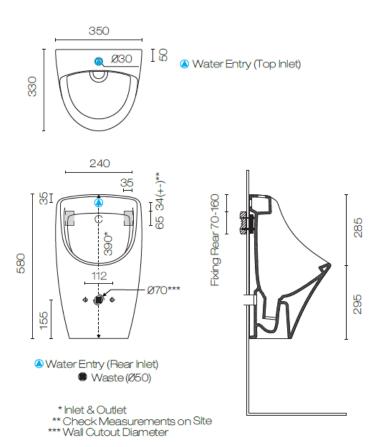

URINAL

Caroma Cube 0.8L Electronic Urinal 683361 / 683360

Supplier Codes678800W / Anti Vandal Code 687396

Ideal for general purpose applications where water conservation is a priority, the Cube 0.8L Electronic Urinal boasts the maximum WELS 6 star rating. With superior hydraulic design and performance, and embracing the modern look of softened angles and clean lines, this vitreous china urinal can enhance the appearance of any contemporary bathroom. New Zealand's first WELS 6 star rated urinal, 0.8L per flush


Smart Demand technology detects usage and activates the flush mode accordingly

Stadium mode adjusts flush automatically in high usage periods, and NEW Smartflush mode minimises water usage

Urine sensing technology is only activated by the user and prevents accidental or unnecessary flushes

radium mode adjusts flush automatically in high usage periods, and NEW Smartflush mode minimises water usage Urine sensing technology is only activated by the user and prevents accidental or unnecessary flushes Matched Performance and trade engineering delivers water-savings without sacrificing performance Pre-installed sensor requires no on site adjustment, Automatic hygiene flush every 24 hours NOTE: Rough in Kit & Fit out Kit sold separately



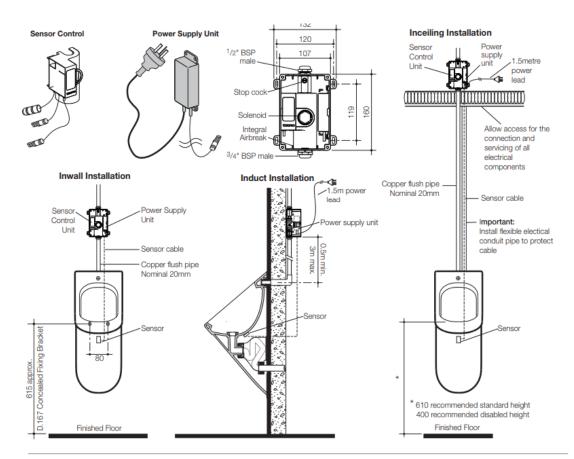

-mico design

Dolphin Combination Unit - Paper Towel Dispenser, Dryer and Bin 02.4031


3 in 1 Recessed satin stainless steel combination paper towel, 10 litre stainless steel waste paper bin and back box.

Capacity – 200 "C" fold or 300 Interleave paper towels, removable

Touch free operation for ultimate hygiene, Manufactured from cast 304 grade stainless steel
Brushed satin finish, Also available with powder coating in any RAL colour, or in coloured acrylic, coloured glass or
coloured Corian (enquire for more detail) Lockable

02.4031 With stainless steel front, 02.4031.1 With glass front, 02.4031.2 With acrylic front 02.4031.3 With corian front, 02.4431 Surface mounted version




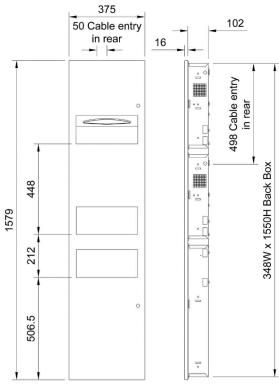

Dolphin Velocity Hand Dryer 726427

Dries hands down to 10 seconds, Built in tamper proof timer function with visible LED indicator
Two speeds and three heat settings
Antibacterial coating, Antibacterial dust filter
Heater Element 900-1300W, Hi / Lo and Off
Weight 9.5kg, IPX4 Rated
Power: 1650 – 2050 w, Current 8.6A, Voltage 220-240v 50/60Hz
Sound level: 75dB(A) at 1m, With integral drip tray
2 Year Limited Warranty



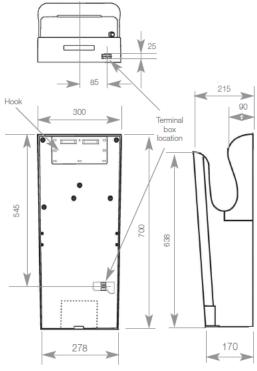


Dolphin Velocity Eco Slimline Recessed Hand Dryer 726429-Satin 726434 - Polished Chrome

Quality Satin Stainless Steel fascia. Motor only 250-500W (adjustable) Heater element 250-500W (adjustable and with an on/off switch facility) Combined power output 500-1,000W ULTRA-SLIM recessed hand-dryer, only 88mm recess depth and projection of 16mm Infra-red, self adjusting sensor. Sound level of 75dB at 1 metre IPX24 rated and Class 1 rated isolation. Dryer delivers 91.3m3/hour This dries hands within 15 seconds, reducing the CO2 emissions 16,000 – 29,000 rpm brush motor air speed adjustable (slower speed makes running quieter) Operating power consumption less than 5 amps at 230V Stand by power less than 0.5W. 3 year manufacturers warranty Outlet temperature 55°C (131°F) at 25°C (77°F) ambient temperature Ska compliant product

BC27-2SCA - Satin BC27-2SCA-PC - Powder Coat



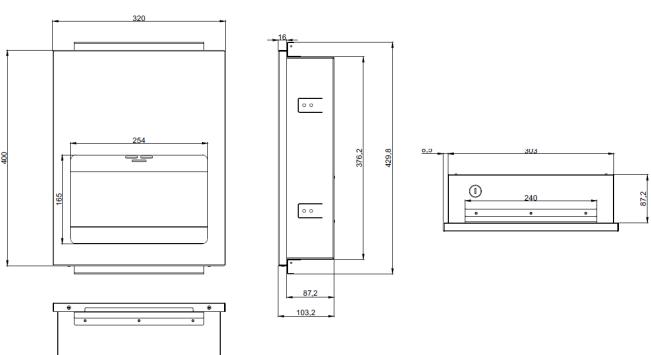

Dolphin Velocity Eco Hand Dryer 726425 - Satin 726432 - Powder Coated

Quality stainless steel body with all metal back plate for excellent vandal resistance White metal version also available, see BC2002W

Very low operating power (see table below) saving 80% or more of user's energy costs Infra red self adjusting sensor

Heater on/off switch and adjustable airflow giving the potential for even greater energy savings (see table below)

Dries hands in only 12-15 seconds with heater and full speed – reducing CO2 emissions drastically


Greenspec listed product

Outlet temperature 55°C (131°F) at 25°C (77°F) ambient temperature with heater on and dryer at full speed Three year limited warranty

Unit should be mounted to give no less than 300mm clearance from the bottom of the unit to the nearest surface below BC2002 - (Satin)

BC2002-PC (Powder Coated)



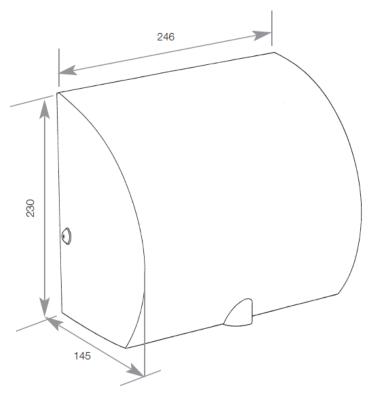




Dolphin Velocity Hand Dryer 726430


The smallest hand dryer in our Velocity range
Incredibly compact, excellent for small space and high traffic areas
Heater 250-500W
Sound level 69 dB
IP rating IP24
Warranty 3 year
Drying time 10 seconds
BC2008














Dolphin Slimline Eco Hand Dryer BC2005

Quality stainless steel body with all metal back plate for excellent vandal resistance
Only 100mm depth of body reducing impact in the washroom and complying with the ADA Disability Act
Very low operating power (see table below) saving 80% or more of user's energy costs against conventional hand
dryers, Less than 0.5W stand-by power, Infra-red self-adjusting sensor with additional manual adjustment
Heater on/off switch and adjustable airflow giving the potential for even greater energy savings (see table below)
Dries hands in under 15 seconds with heater on at full speed - reducing CO2 emissions drastically!
Outlet temperature 55°C (131°F) at 25°C (77°F) ambient temperature with heater on and at full speed
Three year limited warranty, IP24 rated - very high IP rating for a hand dryer rendering it suitable for use in mental
health institutes, Class 1 rated isolation, Average Reuse Rate under WEEE Directive: 78% Average Recovery Rate
under WEEE Directive: 96% Ska compliant product Unit should be mounted to give no less than 300mm clearance
from the bottom of the unit to the nearest surface below Sound level 77.6 dB @ 1 metre, Warm Air Speed Output 70-82 m/s, adjustable, PLEASE NOTE: We strongly recommend that the surfaces beneath and to either side of this
dryer allow regular cleaning (such as smooth cleanable paint, tile, Perspex, stainless steel etc) to prevent staining
from the water blown from users hands. New generation high speed dryers such as this are designed to blow the
water off the hands so consideration like this needs to be given to deal with the water deposits



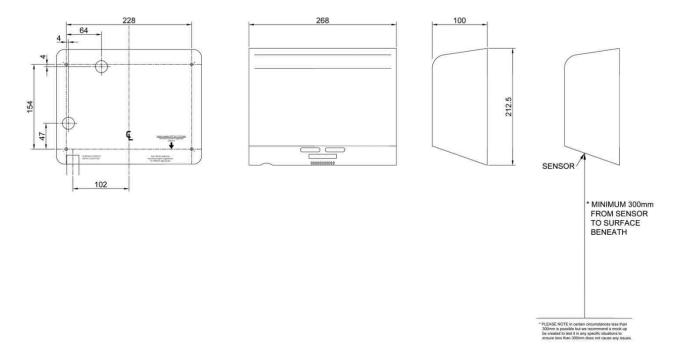


Dolphin Hand Dryer Splash Panel BC2000 - Brushed finish BC2000B - Mirror Polished finish

High quality stainless steel, Manufactured in the same factory as the bulk of our hand dryer range for finish match, Unique drip detail to throw water off the wall,

Eliminates the staining caused by water-run common with high speed

Available in three finishes to match the bulk of our hand dryer ranges: satin stainless steel, polished stainless steel and white metal (white powder coated)



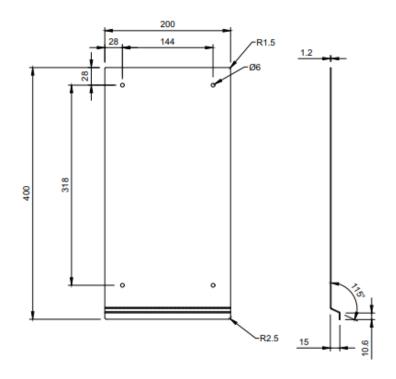

Dolphin Velocity Behind Mirror Hand Dryer 726431

IP14 rated, suitable for use in wet areas.
Interchangeable with paper towel dispenser if needed.


Dryer can be accessed below mirror by loosening 4 tamper proof screws to lower down to bench height for maintenance.

HEPA filter available, reducing spread of dust particles.

Warm Air Speed Output – 52-90 m/s, adjustable

BC2003-BM



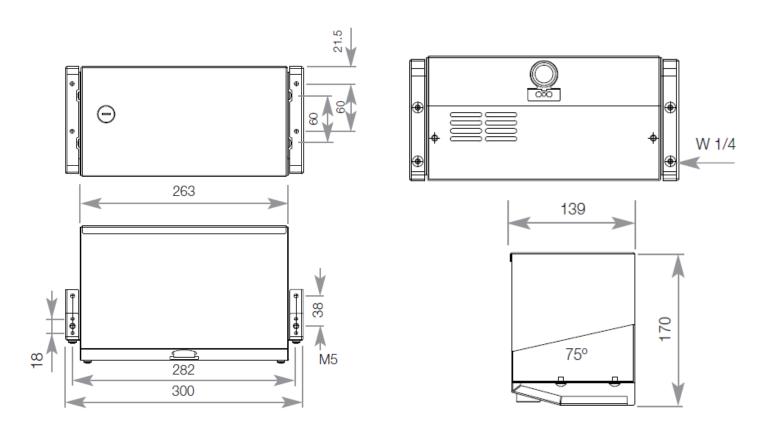

Dolphin Touch Free Paper Towel Dispenser


DP3107 (Transformer powered) DP3108 (Battery powered)

Robust, easy to clean 18/10 chrome nickel stainless steel satin, satin finished, all corners fully welded Designed for paper rolls, 215m (w), Core diameter - 50mm/ outer diameter up to 180mm.

Paper length adjustable from 20cm up to 120 cm

Hands free, sensor technology. Sensor distance 0.5 - 5cm. Idle time adjustable from 1-5 seconds. Power rating - 7 watts. IP protection - AP21. Transformer powered (6V0 -240V, 50Hz supply voltage Also available in polished stainless steel or plastic powder coated to a colour of your choice. Accepts 150-180mm diameter rolls - possible makers are Tork - CODE 290067 or 290016



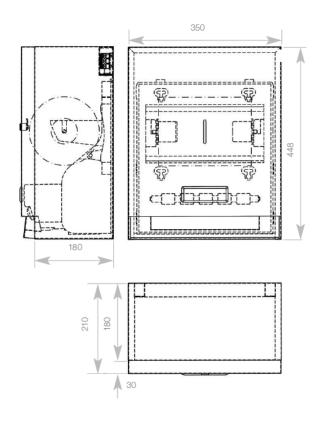

Dolphin Infrared Paper Towel Dispenser with Reserve Roll

DP3109 (Transformer powered)

DP3110 (Battery powered)
Length 350mm Width: 580mm Height: 210mm. Empty weight 11.4 kg DP3109:


Connected Load: Rated Voltage 1N AC 230 V 50HZ. Power Consumption: 7W. Electrical Connection terminal block Environmental Conditions: Ambient temperature +10 °C to +45 °C

DP3110: Connected Load: Rated Voltage: 6V Power Consumption: 7W. Power supply: 4x1, 5V single cell

Environmental Conditions: Ambient temperature +10 °C to +45 °C.

DO NOT USE with unrolled paper or with moisture saturated rolls



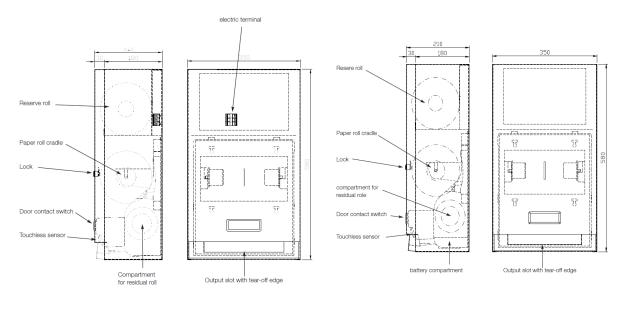

DP3109 DP3110



Dolphin Recessed Infrared Paper Towel Dispenser

DP3307(Transformer powered) DP3308 (Battery powered)
Height: 448mm Width: 350mm Projection: 30mm

Superior quality and timeless design for prestigious washrooms


Robust, easy to clean 18/10 chrome nickel stainless steel, satin finished, all corners fully welded Designed for paper rolls. 215mm (w), Core diameter-50mm/ outer diameter up to 180mm
Paper length adjustable from 20cm up to 120cm
Hands free, sensor technology. Sensor distance 0.5-5cm. Idle time adjustable from 1-5 seconds

VDE/GS proved and certified. Simple mounting - fixings supplied

Power rating - 7 watts. IP protection - IP21. Transformer powered (6V) - 240V, 50HZ supply voltage

Also available in polished stainless steel or plastic powder coolour of your choice Accepts 150-180mm diameter rolls - possible makes are Tork - CODE 290067 or 290016 or Ille- CODE D4030



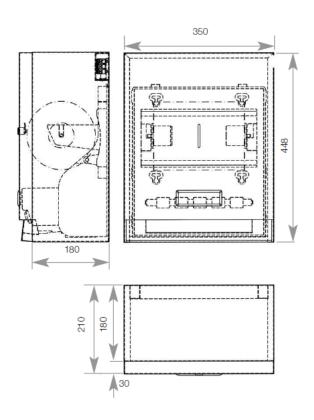



WATER DISPENSERS

-mico design

DRINKING FOUNTAIN


Wall Mounted Drinking Fountain With Sensor Bottle Filler A171.8-BF12 Child or Adult ADA Compliant (when properly installed)

Electric Water Cooler

Flexible, Low Flow, Antimicrobial, anti-rotation, Non-Squirt Bubbler Universal Bi-Level can be installed left high or right high with no additional parts Lead Free Bottle Filler

Hands-Free Sensor Operation 20 Seconds Maximum Run Time



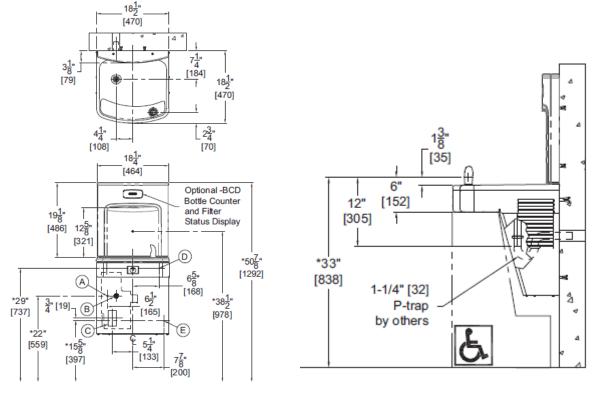

DRINKING FOUNTAIN


Wall Mounted Drinking Fountain With Sensor Bottle Filler A172-BF12


Child or Adult ADA Compliant (when properly installed)
Flexible, Low Flow, Antimicrobial, Anti-Rotation, Non-Squirt Bubbler
Auto-Stop allows Cartridge and Strainer service without removing drinking fountain to access Water
Supply Stop

Supply Stop
Universal Bi-Level can be installed left high or right high with no additional parts
Lead Free
Bottle Filler
Hands-Free Sensor Operation

Hands-Free Sensor Operation 20 Seconds Maximum Run Time



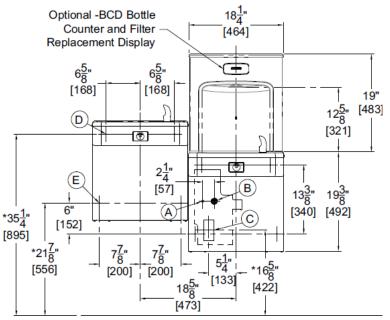




WATER COOLER

Wall Mounted Water Cooler with Sensor Operated Bottle Filler A171.8-VR-BF12 Series

Barrier free, vandal resistant button only, wall mounted water cooler with -bf12 sensor operated bottle filler Electric Water Cooler: Child or Adult ADA Compliant (when properly installed) 304 Stainless Steel Basin and Chrome Plated Brass Button

Flexible, Low Flow, Anti-Microbial, Anti-Rotation, Non-Squirt Bubbler, Auto-stop allows Cartridge and Strainer service without removing, Cooler Deck to access Water Supply Stop, Lead free
Bottle Filler: ADA Compliant, 100-Mesh Inlet Strainer, 120VAC/9.0VDC Plug-In Transformer,

Hands-Free Sensor Operation, 1 GPM Lamindar Flow, 20 Second Maximum Run Time

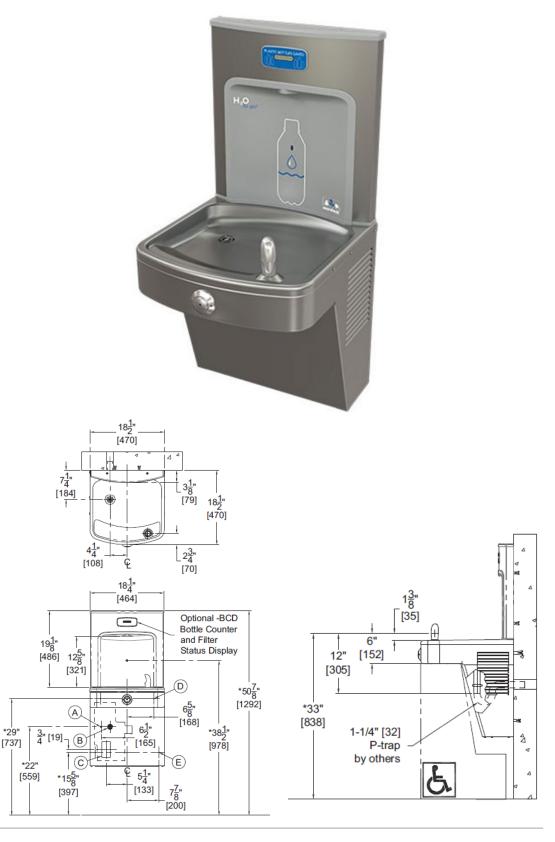

WATER DISPENSER


Surface Mounted Sensor Operated Bottle Filler BF-16

Model BF16 is a Surface Mount Sensor Operated Bottle Filler. Bottle Filling unit shall include Sensor Operated activation with a 20-second maximum run time. LED Lights illuminate the Bottle Fill area and brightens when a Bottle is detected. Optional -BCD (Bottle Counter Display) indicates the quantity of 16 oz disposable Plastic Bottles saved from a land fill and also displays the Water Filter status. Optional Water Filter has NSF/ANSI 42 & 53 certification and reduces lead content in the drinking water by 99%. Bottle Filler shall provide approximately 1.00 GPM flow rate with a Laminar Flow Spout to minimize splashing. Housing has a slim and trim look that blends into your environment. Designed for Maintenance Advantage installation and service. When installed properly, the Bottle Filler complies with ADA forward and side reach requirements. Bottle Filler is fabricated of type 304 stainless steel polished to a satin finish with antimicrobial impact resistant ABS surfaces.







Model BF16-BCD Shown PATENT# D876.890 S



BF16 Series

SURFACE MOUNTED SENSOR OPERATED BOTTLE FILLER





FEATURE PRODUCT ALAVO MIRROR UNITS

-mico design

Alavo Modular Washstation

CUSTOM

When space is at a premium, and energy-efficiency is a priority, this modular, touch-free, behind-mirror handwash system from Dolphin has got all the answers - quick to install, easy to replenish, and a pleasure to use.









Alavo Intergated Mirror System CUSTOM

Alavo is a modular, touch-free, behind-mirror handwash system keeping taps, soap dispensers and hand dryers concealed behind a back-lit mirror above the wash basin. By saving space, minimising water and reducing queues, this wash wall system benefits everyone in the process from design to purchase, contract and installation, facility management and the user.



Alavo Intergated Mirror System custom

Alavo is a modular, touch-free, behind-mirror handwash system keeping taps, soap dispensers and hand dryers concealed behind a back-lit mirror above the wash basin. By saving space, minimising water and reducing queues, this wash wall system benefits everyone in the process from design to purchase, contract and installation, facility management and the user.







WHAT IS ALAVO?

CUSTOM



Tailor design from hundreds of options

CONTROL



Adjust lighting, sensors and modes

INSTALL

TOUCH FREE



Infrared sensor for hygienic operation

MODULAR



Pre-built modules manufactured off-site

CONCEALED



Appliances contained

STYLE

Modern and elegant

premium experience

modules WATER SAVING

Reduces flow rates

and automatic shut off

MAINTAIN



Access to services and consumables

SECURE



LIGHTING



Integrate adaptable lighting systems

SEALED CARTRIDGE SOAP



Reduces contamination and maintenance

mico design

Mico and Affifiated Brands

Mico is New Zealand's largest Plumbing & Bathroom Merchant with over 65 branches nationwide. With our stature and scope, we have access to more bathroom brands than any of our competitors.

Below are just some of our industry leading Brands and Suppliers:



ADESSO Raymor





















≋ENWARE







hansgrohe





BRANCH Details

NORTH ISLAND

KERIKERI

26 Mill Lane / 09 407 5180

WHANGAREI

Commerce Street / 09 438 7239

WARKWORTH

Morrison Drive / 09 422 2430

WHANGAPARAOA*

65 Karepiro Drive / 09 424 6080

3 Tawa Drive / 09 415 1725

ALBANY*

6a Titoki Place / 09 415 4075

WAIRAU VALLEY*

Corner Porana Road & Silverfield / 09 444 8125

HENDERSON

31a Paramount Drive / 09 836 1388

NEW LYNN*

37 Wolverton Street / 09 828 5920

11a Weza Lane / 09 412 2519

AUCKLAND CENTRAL*

64 Cook Street / 09 302 7410

THREE KINGS*

60 Dornwell Road / 09 307 1208

PENROSE*

368 Church Street / 09 579 1971

MT WELLINGTON

53 Lunn Avenue / 09 570 0150

TAKANINI

354 Porchester Road / 09 267 2100

MANUKAU*

5 / 24 Lambie Drive / 09 262 2644

PUKEKOHE

The Zone 28 Subway Road / 09 237 1155

EAST TAMAKI

85 Springs Road / 09 274 4124

FLATBUSH*

Unit D, 419 East Tamaki Road / 09 274 4827

DRURY*

255 Great South Road / 09 294 4960

THAMES*

26a Kopu Road / 07 868 7750

WHITIANGA

24 Joan Gaskell Drive / 07 867 1060

WHANGAMATA*

Corner Martyn Road & Wattle Street / 07 865 0120

HAMILTON

59 Lake Road / 07 847 9079

Corner Vickery Street & Maxwell Place / 07 849 8510

CAMBRIDGE

Corner Oliver Street & Queen Street / 07 823 2770

MATAMATA*

4 Comber Street

TAURANGA

5 St John Street / 07 571 4383

MT MAUNGANUI

30 Newton Street / 07 574 8327

180 Lake Road / 07 348 0079

TOKOROA*

5-7 Campbell Street / 07 886 4850

66 Crown Road / 07 378 4380

390 Childers Road / 06 868 5184

102-106 Taradale Road /

06 843 6002

503 Karamu Road North / 06 878 5182

HAWERA 173 Glover Road / 06 278 0055

NEW PLYMOUTH

72-80 Molesworth Street / 06 759 0372

WANGANUI

80 Wilson Street / 06 348 7001

PALMERSTON NORTH

Corner Railway Avenue & Francis Way / 06 350 1470

PALMERSTON NORTH*

30 Taonui Street / 06 350 1471

LEVIN

33 Hokio Beach Road / 06 367 3160

MASTERTON

408 Queen Street / 06 377 7145

PARAPARAUMU

45 Te Roto Drive / 04 296 1404

PORIRUA

85 Kenepuru Drive / 04 232 1146

HUTT CITY

Corner Pretoria Street & Cornwall Street / 04 569 1917

WELLINGTON

18 Walter Street / 04 802 7680

SOUTH ISLAND

NELSON

20-26 St Vincent Street / 03 548 2334

MOTUEKA

14 King Edward St / 03 528 7710

16 Herbert Street / 03 577 5071

GREYMOUTH

16 MacKay Street / 03 768 5114

HOKITIKA*

Kumara Junction Highway / 03 756 8280

RANGIORA

71 Victoria Street / 03 313 6279

CHRISTCHURCH 163 Montreal Street / 03 366 2464

PAPANUI* 297 Cranford Street / 03 355 0030

HORNBY 124 Waterloo Road / 03 349 6769

ASHBURTON

72 Dobson Street / 03 307 8056

TIMARU

181 Evans Street / 03 688 4073

orner Thames Street & Eden Street / 03 434 5029

DUNEDIN

30 Midland Street / 03 455 2088

KAIKORAI VALLEY* 284b Kaikorai Valley Road

ALEXANDRA 5 MacLean Road / 03 440 2003

8 Connell Terrace / 03 443 8596

QUEENSTOWN

1 Glenda Drive / 03 441 0193

25 Lyne Street / 03 208 1360

INVERCARGILL 83 Liddel Street / 03 214 4424

THE FINER DETAILS

Disclaimer

Not all products are stocked at all branches, however all products can be purchased through any Mico store. Prices and availability are subject to confirmation. Every care has been taken to ensure this catalogue was correct at the time of printing. Product ranges may be amended without notice. All prices include GST and are subject to change without

Some product ranges are exclusive to Mico NZ Limited outlets.

Mico reserves the right to change price or product without prior notice.





