
180 S-Line 180mm Truss Fascia

CONTINUOUS GROUP Made first. Made to last.

CONCRETE TILE ROOF

CONSTRUCTION DETAIL & COMMON DROP HEIGHTS

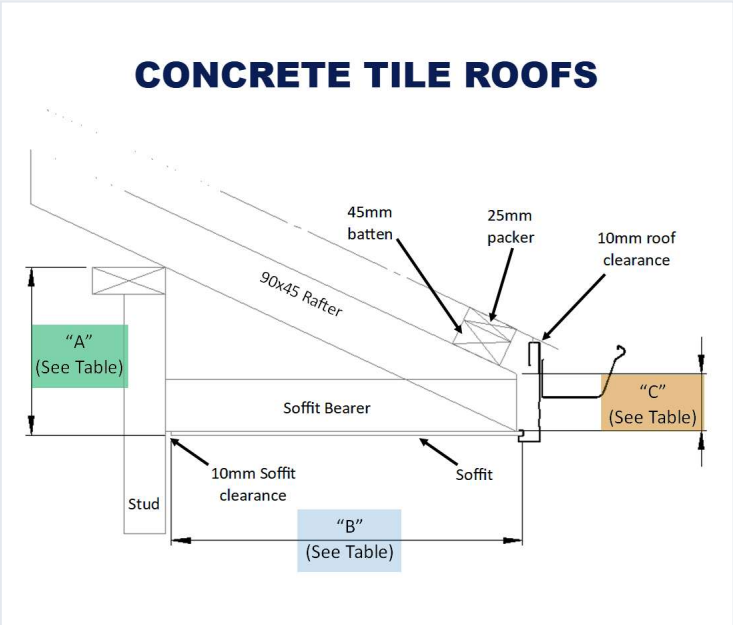

GABLE END DETAIL — UP TO 25°



GABLE END DETAIL — OVER 25°



ROOF PITCH (degrees)	A DROP HEIGHTS (MM) — DIMENSION "A"					C TOE CUT (MM)
	B SOFFIT WIDTH (MM) — DIMENSION "B"					
	300	450	600	750	900	Dimension "C"
15.0	91	131	172	212	252	101
17.5	105	152	199	247	294	101
20.0	119	173	228	282	337	101
22.5	133	195	257	319	381	101
25.0	147	217	287	357	426	101
27.5	161	239	317	395	473	101
30.0	176	262	349	435	522	100
35.0	206	311	416	521	626	99
40.0*	239*	365*	491*	617*	743*	97*
45.0*	276*	426*	576*	726*	876*	93*

"A" Drop height — the shaded columns "B" Soffit width — the blue headings "C" Toe cut — the gold column

DROP HEIGHT "A" ASSUMES

- Soffit clearance 10mm
- Rafter height 90mm
- Roof clearance 10mm
- Batten 45mm + 25mm packer on last batten = 70mm

* Roof pitch over 35 degrees may require a horizontal fascia return and boxed soffit at gable corners.

For other pitches and soffit widths, use the **180 S-Line Online Drop Height Calculator**.

0800 50 1993 · www.continuous.co.nz · cg@continuous.co.nz

All information, images and drawings are correct at time of publication August 2026