



Elephant
Plasterboard
& Fibre Cement
FIRE RATED
SYSTEMS

February 2023

## **Elephant Plasterboard & Fibre Cement Fire Rated Systems Manual**

These publications are continuously being updated and superseded. CURRENT VERSION DATED: February 2023

It is important to check to ensure you have the latest publication. Call Free Help line 0800 ELEPHANT (353742).

Liability for systems that are not designed and installed in accordance with this publication will not be accepted by Elephant Plasterboard (NZ) Limited.

## Copyright

All the material in this document including text, diagrams, figures, patterns, pictures, tables and cad drawings are protected by copyright.

## **Cad Drawings**

Pictures and CAD drawings may be downloaded and used in consented plans for generic references only. Elephant Plasterboard (NZ) Limited takes no liability in CAD drawing details shown. It is up to the designer and or builder to provide specific details and or building construction methods in each case. All pictures and CAD details are generic only.

## **Elephant Plasterboard (NZ) Limited Trademarks:**

Elephant Plasterboard®, Elephant Board®,

Elephant Standard Plasterboard®, Elephant Smartboard®, SmartRock Plasterboard®

Elephant FireSmart®, Elephant MultiSmart®, Elephant AquaSmart®, Elephant CeilingSmart® Elephant SpanSmart®, Elephant SuperSmart®, Elephant BraceSmart®, Elephant NoiseSmart®, Elephant UltraSmart®, Elephant Standard-Plus®, Elephant ImpactSmart®

## **Elephant Plasterboard New Range of Smartboards**

Introducing new 10mm Elephant FireSmart/10mm Elephant CeilingSmart.

10mm Elephant FireSmart is a higher density board compared to 10mm Elephant Standard and provides enhance fire performance.

10mm Elephant CeilingSmart is especially developed to span ceiling battens at 600mm centers providing a light weight and cost effective ceiling lining solution compared to using 10mm Standard Plasterboard at 450mm centres or 13mm Standard Plasterboard at 600mm centre.

All past and future references and installations of 10mm Standard-Plus is interchangeable with 10mm Elephant FireSmart and vice versa.

## **Elephant Plasterboard Product & System Warranty**

Elephant Plasterboard wall and ceiling linings are supported by Elephant Plasterboard's Quality Guarantee. This Warranty covers Elephant Plasterboard products and or systems for a minimum of 10 years from the date of the purchase. Elephant Plasterboard supplies products which are warranted to be free from defects. Any products found to be defective before or after installation will be replaced and/or repaired, provided installation has been in accordance with Elephant Plasterboard's technical literature.

James Hardie fire and acoustic performance, durability and maintenance requirements of James Hardie products, components or systems do not form a part of this Elephant Plasterboard warranty.

For warranty terms & conditions on James Hardie products & components, visit www.jameshardie.co.nz.

## **Free Helpline**

0800 ELEPHANT (353-742)

## **Email**

info@elephantplasterboard.co.nz

## Website

www.elephantplasterboard.co.nz

## Telephone

(09) 818-7706

Elephant Plasterboard (NZ) Limited 14 Bancroft Crescent, Glendene, Auckland 0602 P.O. Box 21-436, Waitakere 0650 New Zealand



## **CONTENTS**

SYSTEM SELECTOR TABLE	4-22
INTRODUCTION	24-29
Limitations and Conditions of Use	
NZBC Compliance	
Fire Resistance Ratings (FRR)	
nternal lining Surface Finish Properties	
Control of External Fire Spread	
Elephant Plasterboard & Fibre Cement Fire Rated Walls - Timber Frame	
Elephant Plasterboard & Fibre Cement Fire Rated Walls - Steel Frame	
Thermal Fire Batten	
Structural Steel Members in Fire Rated Walls	
Cavity Insulation	
Fire Retardant Flexible Underlay	
Rigid Air Barrier	
Elephant QuickBrace System	
Elephant Plasterboard & Fibre Cement Fire Rated Floor/Ceiling	
Product & Component Substitution	
James Hardie Cladding Options & Technical Literature	
NOMENCLATURE	30
Elephant Specification Reference - Fire Wall with Fibre Cement	
Elephant Specification Reference - Floor/Ceilings with Fibre Cement	
EXTERNAL TIMBER FRAME WALLS	31-60
Elephant Plasterboard & James Hardie Linea™ Weatherboard	
Elephant Plasterboard & James Hardie Linea <sup>TM</sup> Oblique <sup>TM</sup> Weatherboard	
Elephant Plasterboard & James Hardie™ Plank Weatherboard	
Elephant Plasterboard & James Hardie Stria™ Cladding	
Elephant Plasterboard & James Hardie Stria	
Elephant Plasterboard & James Hardie Hardie™ Flex Sheet	
Elephant Plasterboard & James Hardie Axon™ Panel	
Elephant Plasterboard & James Hardie Axon → Panel & RAB™Board	
Elephant Plasterboard & James Hardie EasyLap <sup>TM</sup> Panel	
Elephant Plasterboard & James Hardie EasyLap™ Panel & RAB™ Board	
Elephant Plasterboard & James Hardie ExoTec™ Facade Panel & RAB™Board	
Elephant Plasterboard & James Hardie Exorec — Facade Parier & NAB — Board Elephant Plasterboard & James Hardie RAB™ Board & a Weathertight Cladding	
EXTERNAL STEEL FRAME WALLS	61-73
Elephant Plasterboard & RAB™ Board with Selected James Hardie Fibre Cement Cladding	
Elephant Plasterboard & James Hardie RAB™ Board & a Weathertight Cladding	
INTERNAL TIMBER FRAME WALLS	74-76
Elephant Plasterboard & James Hardie Villaboard™ Lining	
FLOOR/CEILING SYSTEMS	77-79
Elephant Plasterboard & Secura™ Interior Flooring	
FLOATING FLOOR/CEILING SYSTEMS	81-83
Elephant Plasterboard & Floating Secura™ Interior Flooring	
CONSTRUCTION DETAIL	84-96
PRODUCT RANGE	98

www.elephantplasterboard.co.nz



## External Fire Rated Walls - Timber Frame

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirements	Page
Elephant F	Plaster	ooard & Jar	nes Hard	ie Linea	a™ Weatherboard	
EJL1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie Linea™ Weatherboard to External side	32
EJL1TL60	-M13	60/60/60	R2.2 glass wool	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie Linea™ Weatherboard to External side	33
Elephant F	Plasterl	ooard & Jar	nes Hard	e Line	a™ Oblique™Weatherboard	
EJOh1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie Linea™ Oblique™ Weatherboard horizontal to External side	34
EJOv1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie Linea™ Oblique™ Weatherboard vertical to External side	35
EJOh1TL60	-M13	60/60/60	R2.2 glass wool	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie Linea™ Oblique™ Weatherboard horizontal to External side	36
EJOv1TL60	-M13	60/60/60	R2.2 glass wool	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie Linea™ Oblique™ Weatherboard vertical to External side	37
Elephant F	Plaster	ooard & Jar	nes Hard	ie™ Pla	nk Weatherboard	
EJW1TL30	-F10	30/30/30	R2.2 glass wool	45	1 x 10mm Elephant FireSmart on Internal side James Hardie™ Plank Weatherboard to External side	38
EJW1TL60	-M13	60/60/60	Hardie™ Mineral	46	1 x 13mm Elephant MultiSmart on Internal side James Hardie™ Plank Weatherboard to External side	39
Elephant F	Plasterl	ooard & Jar	nes Hard	e Stria	™ Cladding	
EJSh1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie Stria™ Cladding horizontal to External side	40
EJSv1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie Stria™ Cladding vertical to External side	41
EJSh1TL60	-M13		R2.2			
		60/60/60	glass wool	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie Stria™ Cladding horizontal to External side	42
EJSv1TL60	-M13	60/60/60		47 47		42
		60/60/60	glass wool R2.2 glass wool	47	James Hardie Stria™ Cladding horizontal to External side  1 x 13mm Elephant MultiSmart on Internal side	
		60/60/60	glass wool R2.2 glass wool	47	James Hardie Stria™ Cladding horizontal to External side  1 x 13mm Elephant MultiSmart on Internal side  James Hardie Stria™ Cladding vertical to External side	
Elephant F	Plaster	60/60/60 ooard & Jar	glass wool  R2.2 glass wool  mes Hard  R2.2	47 ie Stria	James Hardie Stria™ Cladding horizontal to External side  1 x 13mm Elephant MultiSmart on Internal side  James Hardie Stria™ Cladding vertical to External side  TM Cladding & RAB™ Board with CLD Battens  1 x 10mm Elephant FireSmart on Internal side  James Hardie Stria™ Cladding and RAB™ Board	43
EJRS1TL30  EJRS1TL60	-F10 -M13	60/60/60 30/30/30 60/60/60	R2.2 glass wool nes Hard R2.2 glass wool Hardie™ Mineral	47 ie Stria 46 47	James Hardie Stria™ Cladding horizontal to External side  1 x 13mm Elephant MultiSmart on Internal side James Hardie Stria™ Cladding vertical to External side   TM Cladding & RAB™ Board with CLD Battens  1 x 10mm Elephant FireSmart on Internal side James Hardie Stria™ Cladding and RAB™ Board with CLD™ Structural Cavity Batten to External side  1 x 13mm Elephant MultiSmart on Internal side James Hardie Stria™ Cladding and RAB™ Board	43
EJRS1TL30  EJRS1TL60	-F10 -M13	60/60/60 30/30/30 60/60/60	R2.2 glass wool nes Hard R2.2 glass wool Hardie™ Mineral	47 ie Stria 46 47	James Hardie Stria™ Cladding horizontal to External side  1 x 13mm Elephant MultiSmart on Internal side James Hardie Stria™ Cladding vertical to External side  TM Cladding & RAB™ Board with CLD Battens  1 x 10mm Elephant FireSmart on Internal side James Hardie Stria™ Cladding and RAB™ Board with CLD™ Structural Cavity Batten to External side  1 x 13mm Elephant MultiSmart on Internal side James Hardie Stria™ Cladding and RAB™ Board with CLD™ Structural Cavity Batten to External side James Hardie Stria™ Cladding and RAB™ Board with CLD™ Structural Cavity Batten to External side	43

## External Fire Rated Walls - Timber Frame

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirements	Page
Elephant I	Plaster	ooard & Jar	nes Hard	ie Axor	n™ Panel	
EJA1TL30	-F10	30/30/30	R2.2 glass wool	41	1 x 10mm Elephant FireSmart on Internal side James Hardie Axon™ Panel to External side	48
EJA1TL60	-M13	60/60/60	Hardie™ Mineral	42	1 x 13mm Elephant MultiSmart on Internal side James Hardie Axon™ Panel to External side	49
Elephant I	Plasterl	ooard & Jar	nes Hard	ie Axor	n™ Panel & RAB™ Board with CLD Battens	
EJRA1TL30	-F10	30/30/30	R2.2 glass wool	45	1 x 10mm Elephant FireSmart on Internal side James Hardie Axon™ Panel and RAB™ Board with CLD™ Structural Cavity Batten to External side	50
EJRA1TL60	-M13	60/60/60	Hardie™ Mineral	46	1 x 13mm Elephant MultiSmart on One side James Hardie Axon™ Panel and RAB™ Board with CLD™ Structural Cavity Batten to External side	51
Elephant I	Plaster	ooard & Jar	nes Hard	ie Easy	Lap™ Panel	
EJE1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie EasyLap™ Panel to External side	52
EJE1TL60	-M13	60/60/60	Hardie™ Mineral	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie EasyLap™ Panel to External side	53
Elephant I	Plaster	ooard & Jar	nes Hard	ie Easy	Lap™ Panel & RAB™ Board with CLD Battens	
EJRE1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie EasyLap™ Panel and RAB™ Board with CLD™ Structural Cavity Batten to External side	54
EJRE1TL60	-M13	60/60/60	Hardie™ Mineral	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie EasyLap™ Panel and RAB™ Board with CLD™ Structural Cavity Batten to External side	55
Elephant I	Plasterl	ooard & Jar	nes Hard	ie ExoT	ec™ Facade Panel & RAB™ Board	
EJRX1TL30	-F10	30/30/30	R2.2 glass wool	47	1 x 10mm Elephant FireSmart on Internal side James Hardie ExoTec™ Facade Panel and RAB™ Board with Top hat system to External side	56
EJRX1TL60	-M13	60/60/60	Hardie™ Mineral	48	1 x 13mm Elephant MultiSmart on Internal side James Hardie ExoTec <sup>™</sup> Facade Panel and RAB™ Board with Top hat system to External side	57
Elephant I	Plaster	ooard & Jar	nes Hard	ie RAB <sup>1</sup>	<sup>™</sup> Board & a Weathertight Cladding <sup>(See Note 1)</sup>	
EJRN1TL30	-F10	30/30/30	R2.2 glass wool	42	1 x 10mm Elephant FireSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side	58
EJRN1TL60	-M13	60/60/60	Hardie™ Mineral	42	1 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side	59
	-F20	60/60/60	Hardie™ Mineral	46	2 x 10mm Elephant FireSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side	60
EJRN2TL60	-S26	60/60/60	Hardie™ Mineral	47	2 x 13mm Elephant Standard on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side	60
	-M20	60/60/60	Hardie™ Mineral	47	2 x 10mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side	60

Note1: It is important to consider that the fire properties of the external cladding is in accordance with NZBC C/VM1 or C/AS documents. Refer to Table 5.1 of Section 5.4 of C/AS1 and Table 5.5 of Section 5.8.1 of C/AS2 for the information about various risk groups to identify the external fire spread safety requirement applicable to the exterior surface finishes.



## External Fire Rated Walls - Steel Frame

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirements	Page
Elephant l	Plasterl	ooard & RA	B™ board	with S	Selected James Hardie Fibre Cement Cladding	
FIRMACI 20	-M13	30/30/30	Hardie™ Mineral	42 - 47	1 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with Selected James Hardie Fibre Cement cladding to External side	62
EJRH1SL30	-F16	30/30/30	Hardie™ Mineral	42 - 47	1 x 16mm Elephant FireSmart on Internal side James Hardie RAB™ Board with Selected James Hardie Fibre Cement cladding to External side	62
EJRH2SL30	-F20	30/30/30	Hardie™ Mineral	47 - 53	2 x 10mm Elephant FireSmart on Internal side James Hardie RAB™ Board with Selected James Hardie Fibre Cement cladding to External side	64
EJRH2SL60	-M26	60/60/60	Hardie™ Mineral	51 - 54	2 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with Selected James Hardie Fibre Cement cladding to External side	66
Elephant I	Plaster	ooard & Jar	nes Hard	ie RAB <sup>1</sup>	<sup>FM</sup> Board & a Weathertight Cladding <sup>(See Note 1)</sup>	
EJRN1SL30	-M13	30/30/30	Hardie™ Mineral	42	1 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side	68
EJKN1SL30	-F16	30/30/30	Hardie™ Mineral	43	1 x 16mm Elephant FireSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side	68
EJRN2SL30	-F20	30/30/30	Hardie™ Mineral	47	2 x 10mm Elephant FireSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side	70
EJRN2SL60	-M26	60/60/60	Hardie™ Mineral	49	2 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side	72

## Internal Fire Rated Walls - Timber Frame

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirements	Page					
Elephant Plasterboard & James Hardie Villaboard™ Lining											
EJV1TL30	-F10	30/30/30	R2.2 glass wool	42	1 x 10mm Elephant FireSmart on One side James Hardie Villaboard™ Lining to Other side	75					
EJV1TL60	-M13	60/60/60	Hardie™ Mineral	43	1 x 13mm Elephant MultiSmart on One side James Hardie Villaboard™ Lining to Other side	76					

## Floor/Ceilings - Timber Frame


System Number	Lining Suffix	Fire Rating	Insulation		ise trol IIC	Lining Requirements to underside of Frame	Page					
Elephant Plasterboard & James Hardie Secura™ Interior Flooring												
EJS1FC30	-M13	30/30/30	n/a	45	33	1 x 13mm Elephant MultiSmart to underside of frame	78					
EJS1FC60	-F16	60/60/60	n/a	46	33	1 x 16mm Elephant FireSmart to underside of frame	79					

## Full Intertenancy - Floating Floor/Ceilings - Timber Frame

System Number	Lining Suffix	Fire Rating	Insulation		oise ntrol IIC	Lining Requirements to underside of Frame	Page				
Elephant Plasterboard & Floating James Hardie Secura™ Interior Flooring											
EFJ2DFA60	-MS26	60/60/60	R1.8 glass wool	67	57-76	1 x 13 Elephant MultiSmart And 1 x 13 Elephant Standard under the battens	82				
	-M26	60/60/60	R1.8 glass wool	68	57-77	2 x 13 Elephant MultiSmart under the battens	82				



Version update: February 2023

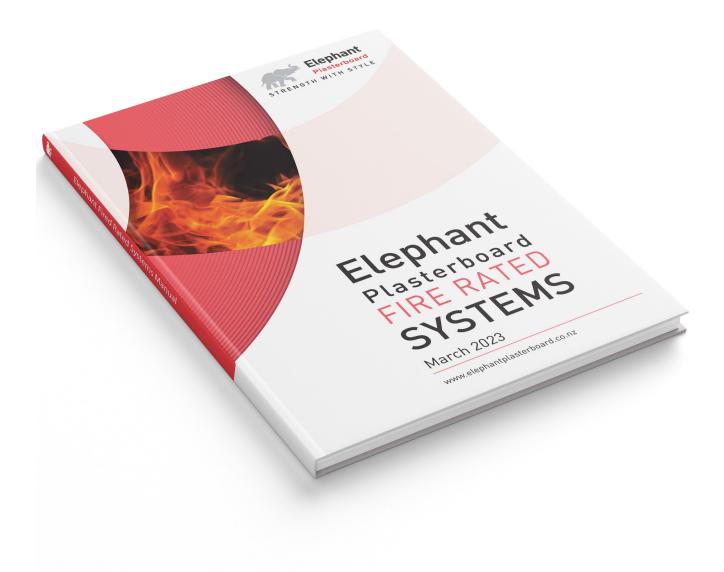

For Non-Acoustic Fire Rated system options, go to

## Elephant Plasterboard Fire Rated Systems Manual

## **Fire Rated Walls**

System	Lining	Fire Rating	Load Bearing		ise itrol	Lining Requirements	F
Number	Suffix	Fire Kating	Ability	STC	Rw	Lining Requirements	Ľ
Timber	Frame	Walls - Two	Way FR	R			
	-S20	30/30/30	LB	37	36	1 x 10mm Elephant Standard on One side 1 x 10mm Elephant Standard on Other side	Ī
E2TL30	-F20	30/30/30	LB	37	36	1 x 10mm Elephant FireSmart on One side 1 x 10mm Elephant FireSmart on Other side	
	-S26	30/30/30	LB	37	36	1 x 13mm Elephant Standard on One side 1 x 13mm Elephant Standard on Other side	
E4TL45	-S40	45/45/45	LB	42	41	2 x 10mm Elephant Standard on One side 2 x 10mm Elephant Standard on Other side	
E4T60	-S40	/60/60	NLB	42	41	2 x 10mm Elephant Standard on One side 2 x 10mm Elephant Standard to Other side	
E2TL60	-M26	60/60/60	LB	38	37	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side	
	-F40	60/60/60	LB	42	41	2 x 10mm Elephant FireSmart on One side 2 x 10mm Elephant FireSmart on Other side	
E4TL60	-S46	60/60/60	LB	42	41	1 x 10mm Elephant Standard and 1 x 13mm Standard on One side 1 x 10mm Elephant Standard and 1 x 13mm Standard on Other side	
-	-MS40	60/60/60	LB	42	41	1 x 10mm Elephant Standard and 1 x 10mm MultiSmart on One side 1 x 10mm Elephant Standard and 1 x 10mm MultiSmart on Other side	
	-S52	60/60/60	LB	43	42	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	
E2TL75	-F32	75/75/75	LB	38	37	1 x 16mm Elephant FireSmart on One side 1 x 16mm Elephant FireSmart on Other side	
	-MS52	/90/90	NLB	43	42	1 x 13mm Elephant MultiSmart and 1 x 13mm Standard on One side 1 x 13mm Elephant MultiSmart and 1 x 13mm Standard on Other side	
E4T90 -	-M46	/90/90	NLB	43	42	1 x 13mm Elephant MultiSmart and 1 x 10mm MultiSmart on One side 1 x 13mm Elephant MultiSmart and 1 x 10mm MultiSmart on Other side	
E4TL90	-M52	90/90/90	LB	45	44	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	
E4T105	-M52	105/105/105	NLB	44	43	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	
E4T120	-FM58	/120/120	NLB	46	45	1 x 16mm Elephant FireSmart and 1 x 13mm MultiSmart on One side 1 x 16mm Elephant FireSmart and 1 x 13mm MultiSmart on Other side	
E6TL120	-M78	120/120/120	LB	44	43	3 x 13mm Elephant MultiSmart on One side 3 x 13mm Elephant MultiSmart on Other side	
	-F10	30/30/30	LB	46	45	1 x 10mm Elephant FireSmart on One side Brick Veneer on Other side	
EBV1TL30	-S13	30/30/30	LB	46	45	1 x 13mm Elephant Standard on One side Brick Veneer on Other side	
EBV1TL60	-M13	60/60/60	LB	46	45	1 x 13mm Elephant MultiSmart on One side Brick Veneer on Other side	
Steel F <u>r</u>	ame W	alls - Two W	ay F <u>RR</u>			! 	
E2SL15	-S26	15/15/15	LB	35	34	1 x 13mm Elephant Standard on One side 1 x 13mm Elephant Standard on Other side	Ī
F2626	-S26	/30/30	NLB	35	34	1 x 13mm Elephant Standard on One side 1 x 13mm Elephant Standard on Other side	
E2S30	-M20	/30/30	NLB	36	35	1 x 10mm Elephant MultiSmart on One side 1 x 10mm Elephant MultiSmart on Other side	
<b>FOC!</b> - 1	-M26	30/30/30	LB	37	36	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side	
E2SL30	-F32	30/30/30	LB	37	36	1 x 16mm Elephant FireSmart on One side 1 x 16mm Elephant FireSmart on Other side	
E46/ 25	-F40	30/30/30	LB	43	42	2 x 10mm Elephant FireSmart on One side 2 x 10mm Elephant FireSmart on Other side	
E4SL30	-S52	30/30/30	LB	43	42	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	
E2S60	-M26	/60/60	NLB	37	36	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side	



## Fire Rated Walls

System	Lining	Fire Rating	Load Bearing		ise trol	Lining Requirements	Page
Number	Suffix		Ability	STC	Rw	Limity Requirements	
	-F40	/60/60	NLB	45	44	2 x 10mm Elephant FireSmart on One side 2 x 10mm Elephant FireSmart on Other side	Pleas
E4S60	-S52	/60/60	NLB	45	44	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	<u> </u>
	-M40	/60/60	NLB	45	44	2 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	efer
E4SL60	-M52	60/60/60	LB	46	45	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	Elep
E2S75	-F32	/75/75	NLB	38	37	1 x 16mm Elephant FireSmart on One side 1 x 16mm Elephant FireSmart on Other side	lephant
E4S90	-M46	/90/90	NLB	45	44	$1\times10$ mm Elephant MultiSmart and $1\times13$ mm MultiSmart on One side $1\times10$ mm Elephant MultiSmart and $1\times13$ mm MultiSmart on Other side	Fire
E4SL90	-F64	90/90/90	LB	47	46	2 x 16mm Elephant FireSmart on One side 2 x 16mm Elephant FireSmart on Other side	Rated
E4S120	-FM58	/120/120	NLB	46	45	1 x 16mm Elephant FireSmart and 1 x 13mm MultiSmart on One side 1 x 16mm Elephant FireSmart and 1 x 13mm MultiSmart on Other side	d Systems
Double	Steel F	rame Wall v	with Mul	tiSm	art C	entral Liner - Two Way FRR	ste
E2CSD60	-M26	/60/60	NLB	44	43	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side	ms M

## Fire Rated Universal Walls

System	Lining	Fire Rating	Load Bearing		ise trol	Lining Requirements
Number	Suffix		Ability	STC	Rw	Lining Requirements
Univers	al Timb	er or Steel	Frame V	Vall -	One	Way FRR
E1UW15	-S13	15/15/15	LB	-	-	1 x 13mm Elephant Standard on One side
E1UW30	-F16a	30/30/30	LB	-	-	1 x 16mm Elephant FireSmart on One side
E2UW30	-F20	30/30/30	LB	-	-	2 x 10mm Elephant FireSmart on One side
E2UW45	-M26	45/45/45	LB	-	-	2 x 13mm Elephant MultiSmart on One side
F21,114/C0	-M26a	60/60/60	LB	-	-	2 x 13mm Elephant MultiSmart on One side
E2UW60	-FM29	60/60/60	LB	-	-	1 x 16mm Elephant FireSmart and 1 x 13mm Elephant MultiSmart on One side
F31,1W00	-M39a	90/90/90	LB	-	-	3 x 13mm Elephant MultiSmart on One side
E3UW90	-FM42	90/90/90	LB	-	-	1 x 16mm Elephant FireSmart and 2 x 13mm Elephant MultiSmart on One side
E3UW120	-MF45a	120/120/120	LB	-	-	1 x 13mm Elephant MultiSmart and 2 x 16mm Elephant FireSmart on One side

## Fire Rated Walls with simultaneous fire exposure on both sides

	Lining	Fire Rating	Load Bearing	Noise Control		Lining Requirements					
Number	Suffix	· ···c ···a·····g	Ability	STC	Rw						
Single Timber Frame Wall with Simultaneous Fire Exposure on Both sides - Two Way FRR											
E2TL30S	-M26	30/-/-	LB	38	37	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side					
E4TL60S	-M52	60/-/-	LB	46	45	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side					

# Please refer Elephant Fire Rated Systems Manual for these System Specification sheets

## **Smoke Separation Walls**

System Number	Lining Suffix	Fire Rating	Load Noise Control Lining R	Lining Requirements	Pa		
		tion - Timbe	Ability er or Ste	sтс el Fra	Rw ame \	Wall - Two Way FRR	
E2sm10	-	10/10/10	LB	-	-	1 x Minimum 10mm Elephant Plasterboard on One side 1 x Minimum 10mm Elephant Plasterboard on Other side	

## Fire Rated Floor/Ceilings

System	Lining	Fire Rating	Load		Noise Control		Lining Dominoments
Number	Suffix	rire Kating	Bearing Ability	STC	Rw	IIC	Lining Requirements
Floor/C	eiling						
E1FC15	-S13	15/15/15	LB	38	37	31	1 x 13mm Elephant Standard
E1FC30	-M13	30/30/30	LB	39	39	32	1 x 13mm Elephant MultiSmart
E2FC30	-S26	30/30/30	LB	39	38	32	2 x 13mm Elephant Standard
E1FC45	-M13	45/45/45	LB	39	39	32	1 x 13mm Elephant MultiSmart
E1FC60	-F16	60/60/60	LB	39	38	32	1 x 16mm Elephant FireSmart
E2FC60	-MS26	60/60/60	LB	40	39	33	1 x 13mm Elephant MultiSmart and 1 x 13mm Elephant Standard
E2FC90	-FM29	90/90/90	LB	41	40	34	1 x 16mm Elephant FireSmart and 1 x 13mm Elephant MultiSmart
E3FC120	-M39	120/120/120	LB	43	42	35	3 x 13mm Elephant MultiSmart
Compo	site Joi	st Floor/Cei	ling				
E1CJ30	-M13	30/30/30	LB	39	38	32	1 x 13mm Elephant MultiSmart
E2CJ30	-S26	30/30/30	LB	39	38	32	2 x 13mm Elephant Standard
E1CJ45	-M13	45/45/45	LB	39	38	32	1 x 13mm Elephant MultiSmart
E1CJ60	-F16	60/60/60	LB	39	38	32	1 x 16mm Elephant FireSmart
E2CJ60	-MS26	60/60/60	LB	40	39	33	1 x 13mm Elephant MultiSmart and 1 x 13mm Elephant Standard
Steel Jo	ist Floc	or/Ceiling					
E1SJ30	-M13	30/30/30	LB	35	34	31	1 x 13mm Elephant MultiSmart
E2SJ60	-M26	60/60/60	LB	39	38	32	2 x 13mm Elephant MultiSmart
Battene	d Flooi	r/Ceiling					
E1BC30	-M13	30/30/30	LB	35	34	31	1 x 13mm Elephant MultiSmart
E1BC60	-F16	60/60/60	LB	39	38	32	1 x 16mm Elephant FireSmart
Direct F	ix Clip	Floor/Ceilin	g				
E1DF45	-M13	45/45/45	LB	49	48	42	1 x 13mm Elephant MultiSmart
E1DF60	-F16	60/60/60	LB	49	48	43	1 x 16mm Elephant FireSmart
E2DF60	-MS26	60/60/60	LB	49	48	43	1 x 13mm Elephant MultiSmart and 1 x 13mm Elephant Standard
E2DF75	-M26	75/75/75	LB	52	51	43	2 x 13mm Elephant MultiSmart



## Fire Rated Floor/Ceilings

System	Lining	Fire Rating	Load Bearing		Noise Control	l	Lining Requirements	Pa
Number	Suffix	Fire Nating	Ability	STC	Rw	IIC	Lilling nequirements	Po
E2DF90	-F32	90/90/90	NLB	54	53	43	2 x 16mm Elephant FireSmart	
E3DF120	-M39	120/120/120	LB	54	53	43	3 x 13mm Elephant MultiSmart	
Suspen	ded Gr	id Floor/Cei	ling					
E2SC30	-S26	30/30/30	LB	50	49	42	2 x 13mm Elephant Standard	
	-M20	30/30/30	LB	50	49	42	2 x 10mm Elephant MultiSmart	
E1SC45	-M13	45/45/45	LB	48	47	42	1 x 13mm Elephant MultiSmart	
E1SC60	-F16	60/60/60	LB	48	47	43	1 x 16mm Elephant FireSmart	
E1XC60	-F16	60/60/60	LB	48	47	43	1 x 16mm Elephant FireSmart	
2SC60	-MS26	60/60/60	LB	48	47	42	1 x 13mm Elephant MultiSmart and 1 x 13mm Elephant Standard	
E2SC75	-M26	75/75/75	LB	51	50	42	2 x 13mm Elephant MultiSmart	
E2SC90	-F32	90/90/90	LB	53	52	43	2 x 16mm Elephant FireSmart	
E2XC90	-FM29	90/90/90	LB	48	47	43	1 x 16mm Elephant FireSmart and 1 x 13mm Elephant MultiSmart	
System	Lining	Univer	Load Bearing		ngs Noise Control		Lining Requirements	
Number	Suffix		Ability	STC	Rw	IIC		
Univers	al Ceili	ng - Timber	or Stee	Frar	ne			
E1UC15	-M13	15/15/15	LB	-	-	-	1 x 13mm Elephant MultiSmart	
E1UC30	-F16a	30/30/30	LB	-	-	-	1 x 16mm Elephant FireSmart	
	-M26a	60/60/60	LB	_	_	_	2 x 13mm Elephant MultiSmart	

## Fire Rated Universal Ceilings

System	Lining	Fire Rating	Load Bearing		Noise Contro	l	Lining Requirements
Number	Suffix	The name	Ability	STC	Rw	IIC	Liming requirements
Univers	al Ceili	ng - Timber	or Stee	l Fran	ne		
E1UC15	-M13	15/15/15	LB	-	-	-	1 x 13mm Elephant MultiSmart
E1UC30	-F16a	30/30/30	LB	-	-	-	1 x 16mm Elephant FireSmart
F211662	-M26a	60/60/60	LB	-	-	-	2 x 13mm Elephant MultiSmart
E2UC60	-FM29	60/60/60	LB	-	-	-	1 x 16mm Elephant FireSmart and 1 x 13mm Elephant MultiSmart
E311C00	-M39a	90/90/90	LB	-	-	-	3 x 13mm Elephant MultiSmart
E3UC90	-FM42	90/90/90	LB	-	-	-	1 x 16mm Elephant FireSmart and 2 x 13mm Elephant MultiSmart

# Please refer Elephant Fire Rated Systems Manual for these System Specification sheets

## Fire Rated Speciality Systems

			Fire Rating	Load Bearing Ability		Noise	Control			
		Lining				S	TC			_
		Suffix			64mm	Stud	102mr	n Stud	Lining Requirements	Page
				Ability	No Fill	Fill	No Fill	Fill		


Shaft Wa	all - Fire	Rated from	n Shaft S	ide o	nly			
E1SWS60	-M13	-/60/60	NLB	39	45	42	46	1 x 13mm Elephant MultiSmart
E2SWS90	-M26	-/90/90	NLB	43	49	46	50	2 x 13mm Elephant MultiSmart
E2SWS120	-FM29	-/120/120	NLB	44	50	46	51	1 x 16mm Elephant FireSmart and 1 x 13mm Elephant MultiSmart
Shaft Wa	all - Fire	Rated from	Either	Side				
E1SWE30	-M13	-/30/30	NLB	39	45	42	46	1 x 13mm Elephant MultiSmart
E2SWE60	-M26	-/60/60	NLB	43	49	46	50	2 x 13mm Elephant MultiSmart
E2SWE90	-FM29	-/90/90	NLB	44	50	46	51	1 x 16mm Elephant FireSmart and 1 x 13mm Elephant MultiSmart
E3SWE120	-FM42	-/120/120	NLB	46	51	48	52	1 x 16mm Elephant FireSmart and 2 x 13mm Elephant MultiSmart

## Elephant Shaft Panel

**Elephant Shaft Panel** 

## Fire Rated Columns & Beams

System	Lining	Fire Rating	Load Bearing	No Con		Lining Requirements
Number	Suffix	cg	Ability	STC	Rw	
Steel Co	lumn 8	Beam - Tin	nber Stra	appe	d	
E1CBT15	-S13	15/-/-	LB	-	-	1 x 13mm Elephant Standard
E1CBT30	-F16	30/-/-	LB	-	-	1 x 16mm Elephant FireSmart
E2CBT30	-F20	30/-/-	LB	-	-	2 x 10mm Elephant FireSmart
E2CBT60	-M26	60/-/-	LB	-	-	2 x 13mm Elephant MultiSmart
E2CBT90	-F32	90/-/-	LB	-	-	2 x 16mm Elephant FireSmart
E3CBT120	-MF45	120/-/-	LB	-	-	1 x 13mm Elephant MultiSmart and 2 x 16mm Elephant FireSmart
Steel Co	lumn 8	Beam - Ste	el Clip a	nd C	hanr	nel
E1CBS15	-S13	15/-/-	LB	-	-	1 x 13mm Elephant Standard
E1CBS30	-F16	30/-/-	LB	-	-	1 x 16mm Elephant FireSmart
E2CBS30	-F20	30/-/-	LB	-	-	2 x 10mm Elephant FireSmart
E2CBS60	-M26	60/-/-	LB	-	-	2 x 13mm Elephant MultiSmart
E2CBS90	-F32	90/-/-	LB	-	-	2 x 16mm Elephant FireSmart
E3CBS120	-MF45	120/-/-	LB	-	-	1 x 13mm Elephant MultiSmart and 2 x 16mm Elephant FireSmart

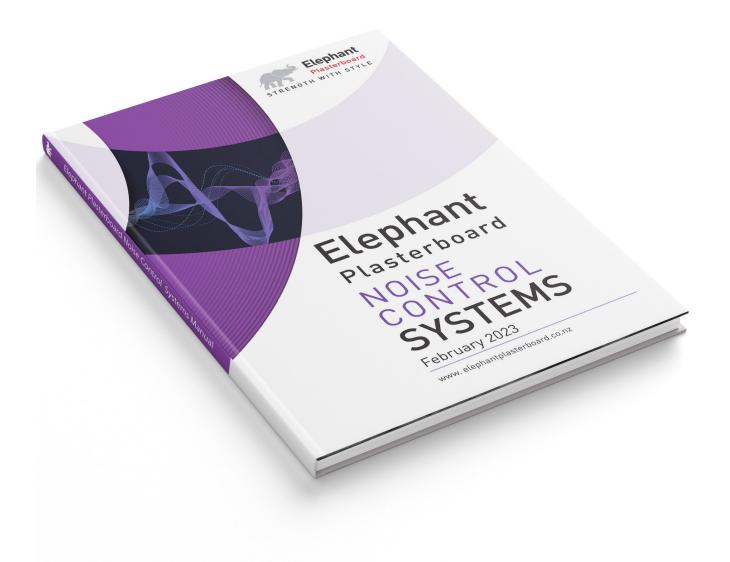

For Noise Control Fire Rated system options, go to

## Elephant Plasterboard Noise Control Systems Manual

## Full Intertenancy - Fire Rated Walls

System Number	Lining Suffix	Fire Rating	Load Bearing Ability		oise etrol Rw	Lining Requirements	Pag
Timber I	Double	Frame Wa	ılls - Loa	d Be	aring		Pe
	-F30	30/30/30	LB	55	54	1 x 10mm Elephant FireSmart on One side 2 x 10mm Elephant FireSmart on Other side	Please refer to the
E3TDLA30	-S39	30/30/30	LB	57	56	1 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	efer
	-M30	30/30/30	LB	58	57	1 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	to
E4TDLA45	-S40	45/45/45	LB	58	57	2 x 10mm Elephant Standard on One side 2 x 10mm Elephant Standard on Other side	
E2TDLA60	-M26	60/60/60	LB	55	54	1 x 13mm Elephant MultiSmart on One Side 1 x 13mm Elephant MultiSmart on Other Side	pha
	-MS39	60/60/60	LB	58	57	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant Standard on Other side	nt N
E3TDLA60	-M33	60/60/60	LB	59	58	1 x 13mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	oise (
	-M39	60/60/60	LB	61	60	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	Elephant Noise Control Systems Manual for these System Speci
	-S46	60/60/60	LB	60	59	1 x 10mm Elephant Standard and 1 x 13mm Standard on One side 1 x 10mm Elephant Standard and 1 x 13mm Standard on Other side	rol S
E. T. D. J. C. D.	-F40	60/60/60	LB	60	59	2 x 10mm Elephant FireSmart on One side 2 x 10mm Elephant FireSmart on Other side	ystei
E4TDLA60	-S52	60/60/60	LB	62	61	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	ns M
	-M40	60/60/60	LB	62	61	2 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	anua
E2TDLA75	-F32	75/75/75	LB	56	55	1 x 16mm Elephant FireSmart on One side 1 x 16mm Elephant FireSmart on Other side	
E4TDLA90	-M52	90/90/90	LB	67	66	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	thes
Timber S	Single	Frame Wal	ls with F	Resilie	ent N	lount - Load Bearing	, e
F2TML 420	-S39	30/30/30	LB	55	54	Framing Side: 1 x 13mm Elephant Standard Mount Side: 2 x 13mm Elephant Standard	ystei
E3TMLA30	-M30	30/30/30	LB	56	55	Framing Side: 1 x 10mm Elephant MultiSmart Mount Side: 2 x 10mm Elephant MultiSmart	dS w
E4TMLA30	-F40	30/30/30	LB	58	57	Framing Side: 2 x 10mm Elephant FireSmart Mount Side: 2 x 10mm Elephant FireSmart	
E4TMLA45	-S52	45/45/45	LB	61	60	Framing Side: 2 x 13mm Elephant Standard Mount Side: 2 x 13mm Elephant Standard	fication sheets
E3TMLA60	-M39	60/60/60	LB	58	57	Framing Side: 1 x 13mm Elephant MultiSmart Mount Side: 2 x 13mm Elephant MultiSmart	n sh
E4TMLA60	-M40	60/60/60	LB	62	61	Framing Side: 2 x 10mm Elephant MultiSmart Mount Side: 2 x 10mm Elephant MultiSmart	eets
E4TMLA90	-M52	90/90/90	LB	63	62	Framing Side: 2 x 13mm Elephant MultiSmart Mount Side: 2 x 13mm Elephant MultiSmart	
Timber :	Single	Frame Wal	ls with F	Resilie	ent R	ail - Load Bearing	
E4TRLA45	-S52	45/45/45	LB	56	55	Framing Side: 2 x 13mm Elephant Standard Rail Side: 2 x 13mm Elephant Standard	
E4TRLA60	-M40	60/60/60	LB	55	54	Framing Side: 2 x 10mm Elephant MultiSmart Rail Side: 2 x 10mm Elephant MultiSmart	
E4TRLA90	-M52	90/90/90	LB	57	56	Framing Side: 2 x 13mm Elephant MultiSmart Rail Side: 2 x 13mm Elephant MultiSmart	



## Full Intertenancy - Fire Rated Walls

System	Lining	Fire Rating	Load Bearing		oise ntrol	Lining Requirements	Pag
Number	Suffix	rire Kating	Ability	STC	Rw	Lining Requirements	Pag
Steel Do	uble F	rame Walls	- Non L	oad	Beari	ing	Pie
F35DA30	-S39	/30/30	NLB	55	54	1 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	Please refer to the
E3SDA30	-M30	/30/30	NLB	56	55	1 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	reter
E4SDA45	-F40	/45/45	NLB	58	57	2 x 10mm Elephant FireSmart on One Side 2 x 10mm Elephant FireSmart on Other Side	o t
E2SDA60	-M26	/60/60	NLB	55	54	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side	
	-MS39	/60/60	NLB	57	56	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant Standard on Other side	epha
E3SDA60	-M33	/60/60	NLB	58	57	1 x 13mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	Elephant Noise Control Systems Manual for these System Spec
	-M39	/60/60	NLB	61	60	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	oise (
E46DA60	-S52	/60/60	NLB	61	60	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	Cont
E4SDA60	-M40	/60/60	NLB	61	60	2 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	rols
E2SDA75	-F32	/75/75	NLB	56	55	1 x 16mm Elephant FireSmart on One side 1 x 16mm Elephant FireSmart on Other side	yster
E4SDA75	-MS52	/75/75	NLB	63	62	1 x 13mm Standard and 1x13mm MultiSmart on One side 1 x 13mm Standard and 1x13mm MultiSmart on Other side	ns M
E4SDA90	-M46	/90/90	NLB	63	62	$1\times10$ mm MultiSmart and $1\times13$ mm MultiSmart on One side $1\times10$ mm MultiSmart and $1\times13$ mm MultiSmart on Other side	anua
E4SDA105	-M52	/105/105	NLB	65	64	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	al for
Steel Do	uble F	rame Walls	- Load	Bear	ing		5
E2SDLA30	-M26	30/30/30	LB	55	54	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side	ese S
LZ3DLA30	-F32	30/30/30	LB	56	55	1 x 16mm Elephant FireSmart on One side 1 x 16mm Elephant FireSmart on Other side	ystei
E3SDLA30	-MF33	30/30/30	LB	58	57	1 x 13mm Elephant MultiSmart on One side 2 x 10mm Elephant FireSmart on Other side	as m
LJJDLAJU	-M39	30/30/30	LB	61	60	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	
E4SDLA30	-F40	30/30/30	LB	59	58	2 x 10mm Elephant FireSmart on One side 2 x 10mm Elephant FireSmart on Other side	catio
E4SDLA45	-S52	45/45/45	LB	61	60	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	incation sheets
L+3DLA43	-M40	45/45/45	LB	61	60	2 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	eets
E4SDLA60	-M52	60/60/60	LB	65	64	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	
E4SDLA90	-F64	90/90/90	LB	66	65	2 x 16mm Elephant FireSmart on One side 2 x 16mm Elephant FireSmart on Other side	

## Full Intertenancy - Fire Rated Walls

System	Lining	Fire Rating	Load Bearing		ise itrol	Lining Requirements	T
Number	Suffix	riie Katilig	Ability	STC	Rw	Lilling Requirements	
Steel Do	uble F	rame Walls	with M	ultiS	mart	Central Liner - Non Load Bearing	
E4CSDA60	-MS46	/60/60	NLB	56	56	1 x 13mm Elephant MultiSmart and 1 x 10mm Standard on One side 1 x 13mm Elephant MultiSmart and 1 x 10mm Standard on Other side	
E4C3DA00	-MS52	/60/60	NLB	57	58	$1 \times 13$ Elephant MultiSmart And $1 \times 13$ Elephant Standard on One side $1 \times 13$ Elephant MultiSmart And $1 \times 13$ Elephant Standard on Other side	
Steel Fra	me Wa	alls with Re	silient N	/lour	it - N	on Load Bearing	
E3SMA30	-S39	/30/30	NLB	55	54	Frame Side: 1 x 13mm Elephant Standard Mount Side: 2 x 13mm Elephant Standard	
	-M30	/30/30	NLB	55	54	Frame Side: 1 x 10mm Elephant MultiSmart Mount Side: 2 x 10mm Elephant MultiSmart	
E4SMA30	-F40	/30/30	NLB	56	55	Frame Side: 2 x 10mm Elephant FireSmart  Mount Side: 2 x 10mm Elephant FireSmart	
E3SMA60	-MS39	/60/60	NLB	56	55	Frame Side: 1 x 13mm Elephant MultiSmart Mount Side: 2 x 13mm Elephant Standard	
	-M39	/60/60	NLB	57	56	Frame Side: 1 x 13mm Elephant MultiSmart Mount Side: 2 x 13mm Elephant MultiSmart	
E4SMA60	-S52	/60/60	NLB	59	58	Frame Side: 2 x 13mm Elephant Standard Mount Side: 2 x 13mm Elephant Standard	
	-M40	/60/60	NLB	59	58	Frame Side: 2 x 10mm Elephant MultiSmart Mount Side: 2 x 10mm Elephant MultiSmart	
E4SMA90	-M46	/90/90	NLB	60	59	Frame Side: $1 \times 13$ mm Elephant MultiSmart and $1 \times 10$ mm MultiSmart Mount Side: $1 \times 13$ mm Elephant MultiSmart and $1 \times 10$ mm MultiSmart	
E4SMA105	-M52	/105/105	NLB	62	61	Frame Side: 2 x 13mm Elephant MultiSmart Mount Side: 2 x 13mm Elephant MultiSmart	
Steel Fra	me Wa	alls with Re	silient F	≀ail -	Non	Load Bearing	
E4SRA60	-S52	/60/60	NLB	56	55	Frame Side: 2 x 13mm Elephant Standard Rail Side: 2 x 13mm Elephant Standard	
LTSITAGO	-M40	/60/60	NLB	56	55	Frame Side: 2 x 10mm Elephant MultiSmart Rail Side: 2 x 10mm Elephant MultiSmart	
E4SRA90	-M46	/90/90	NLB	57	56	Frame Side: 1 x 13mm Elephant MultiSmart and 1 x 10mm MultiSmart Rail Side: 1 x 13mm Elephant MultiSmart and 1 x 10mm MultiSmart	
E4SRA105	-M52	/105/105	NLB	59	58	Frame Side: 2 x 13mm Elephant MultiSmart Rail Side: 2 x 13mm Elephant MultiSmart	
<b>Quiet St</b>	eel Fra	me Walls -	Non Lo	ad Be	earing	g	
E4SQA30	-F40	/30/30	NLB	55	54	2 x 10mm Elephant FireSmart on One side 2 x 10mm Elephant FireSmart on Other side	
E4SQA45	-S46	/45/45	NLB	56	55	1x 10mm Elephant Standard and 1 x 13mm Standard on One side 1x 10mm Elephant Standard and 1 x 13mm Standard on Other side	
	-M33	/60/60	NLB	55	54	1 x 13mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	
E3SQA60	-M36	/60/60	NLB	55	54	1 x 13mm Elephant MultiSmart on One side 1 x 10mm Elephant MultiSmart and 1 x 13mm MultiSmart on Other side	
	-M39	/60/60	NLB	57	56	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	
EASONGO	-S52	/60/60	NLB	57	56	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	
E4SQA60	-M40	/60/60	NLB	57	56	2 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	
E4SQA75	-MS52	/75/75	NLB	59	58	1 x13mm Elephant MultiSmart and 1x13mm Standard on One side 1 x13mm Elephant MultiSmart and 1x13mm Standard on Other side	
E4SQA90	-M46	/90/90	NLB	59	58	1 x 10mm Elephant MultiSmart and 1 x 13mm MultiSmart on One side 1 x 10mm Elephant MultiSmart and 1 x 13mm MultiSmart on Other side	
E4SQA105	-M52	/105/105	NLB	61	60	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	

Page

Please refer to the Elephant Noise Control Systems Manual for these System Specification sheets

System	Lining	Fire Rating	Load Bearing		ise trol	Lining Requirements	Page	1
Number	Suffix	<b>.</b>	Ability	STC	Rw	3 - 4		

Stagger	Staggered Steel Stud Walls - Non Load Bearing											
E3SSA30	-S39	/30/30	NLB	55	54	1 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side						
E4SSA45	-F40	/45/45	NLB	56	55	2 x 10mm Elephant FireSmart on One side 2 x 10mm Elephant FireSmart on Other side						
F255 A 60	-MS39	/60/60	NLB	56	55	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant Standard on Other side						
E3SSA60	-M39	/60/60	NLB	57	56	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side						
E4SSA60	-S52	/60/60	NLB	59	58	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side						
F455400	-M46	/90/90	NLB	59	58	1 x 10mm MultiSmart and 1 x 13mm MultiSmart on One side 1 x 10mm MultiSmart and 1 x 13mm MultiSmart on Other side						
E4SSA90	-M52	/90/90	NLB	62	61	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side						

## Full Intertenancy - Fire Rated Floor/Ceilings

System	Lining	Fire Rating	Load Bearing		Noise Control		Lining Requirements	Page
Number	Suffix	The Rating	Ability	STC	Rw	IIC	Enning Nequirements	1 age
Direct Fix	Clip - I	Floating Floating	oor/Ceil	ing -	Timb	er Jo	ist	Ple
EFJ2DFA60	-MS26	60/60/60	LB	67	66	57-76	1 x 13mm Elephant MultiSmart and 1 x 13mm Elephant Standard	Please refer to the
EFJZDFA00	-M26	60/60/60	LB	68	67	57-77	2 x 13mm Elephant MultiSmart	efer
FFD2DFACO	-MS26	60/60/60	LB	64	63	55-72	1 x 13mm Elephant MultiSmart and 1 x 13mm Elephant Standard	to th
EFP2DFA60	-M26	60/60/60	LB	65	64	56-72	2 x 13mm Elephant MultiSmart	
Direct Fix	Clip - I	loating Fl	oor/Ceil	ing -	Steel	Joist		de
EFJ2DFsA45	-M26	45/45/45	LB	67	66	56-76	2 x 13mm Elephant MultiSmart	Elephant Noise
EFP2DFsA45	-M26	45/45/45	LB	64	63	55-72	2 x 13mm Elephant MultiSmart	Voise
EFJ2DFsA60	-FM29	60/60/60	LB	67	66	56-76	1 x 13mm Elephant MultiSmart and 1 x 16mm Elephant FireSmart	Con
EFP2DFsA60	-FM29	60/60/60	LB	64	63	56-72	1 x 13mm Elephant MultiSmart and 1 x 16mm Elephant FireSmart	tro
Direct Fix	Clip - I	-loor/Ceilir	ng - Tim	ber J	oist			Sys
E2DFA60	-MS26	60/60/60	LB	56	55	46-73	1 x 13mm Elephant MultiSmart and 1 x 13mm Elephant Standard	tems
E2DFA75	-M26	75/75/75	LB	57	56	46-73	2 x 13mm Elephant MultiSmart	Mai
E2DFA90	-FM29	90/90/90	LB	57	56	47-73	1 x 16mm Elephant FireSmart and 1 x 13mm Elephant MultiSmart	nual
	-F32	90/90/90	LB	58	57	47-73	2 x 16mm Elephant FireSmart	for t
Suspende	d Grid	Floor/Ceil	ing - Tir	nber .	Joist			les
E2SCA60	-MS26	60/60/60	LB	56	55	40-72	1 x 13mm Elephant MultiSmart and 1 x 13mm Elephant Standard	Control Systems Manual for these System Specifi
E2SCA75	-M26	75/75/75	LB	56	55	40-72	2 x 13 Elephant MultiSmart	stem
E2SCA90	-FM29	90/90/90	LB	57	56	47-72	1 x 16mm Elephant FireSmart and 1 x 13mm Elephant MultiSmart	Spe
L23CA90	-F32	90/90/90	LB	57	56	40-73	2 x 16mm Elephant FireSmart	cifica
Direct Fix	Clip - I	loor/Ceilir	ng - Ste	el Jois	st			<b>ĕ</b> .
E2DFsA45	-M26	45/45/45	LB	56	55	47-74	2 x 13mm Elephant MultiSmart	cation sheets
E2DFsA60	-FM29	60/60/60	LB	57	56	47-75	1 x 16mm Elephant FireSmart and 1 x 13mm Elephant MultiSmart	eets
2201 37100	-F32	60/60/60	LB	57	56	47-75	2 x 16mm Elephant FireSmart	

₽
₩.
ase refer to the Elep
Ď
3
<u> </u>
Œ,
3
6
<b>—</b>
Ž
æ
<u>m</u>
Ð
<u> </u>
2
<b>5</b>
7
Z
<u>o</u> .
Ω.
æ
Ŭ
9
#
$\bar{z}$
$\underline{\smile}$
Ś
ise Control Systems Ma
ä
œ
3
-
≤
<u>න</u>
nu
ā
al for the
ਨ
Ŧ
≄
7
Š
ese System Sp
S
S
#
Ĕ
2
õ
ň
cific
<u>U</u>
a
₹.
ion s
S
Ë
Φ
æ
S

System Number	Lining Suffix	Fire Rating	Load Bearing Ability	-	ise itrol Rw	Lining Requirements	Page
Single Ti	mber Fr	ame Walls -	Load Bea	aring			P
	-S20	30/30/30	LB	39	38	1 x 10mm Elephant Standard on One side 1 x 10mm Elephant Standard on Other side	ease
E2TLa30	-S26	30/30/30	LB	40	39	1 x 13mm Elephant Standard on One side 1 x 13mm Elephant Standard on Other side	refer
	-M20	30/30/30	LB	41	40	1 x 10mm Elephant MultiSmart on One side 1 x 10mm Elephant MultiSmart on Other side	Please refer to the
	-S30	30/30/30	LB	42	41	1 x 10mm Elephant Standard on One side 2 x 10mm Elephant Standard on Other side	
E3TLa30	-S39	30/30/30	LB	43	42	1 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	epha
	-M30	30/30/30	LB	44	43	1 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	nt No
E4TLa45	-S40	45/45/45	LB	44	43	2 x 10mm Elephant Standard on One side 2 x 10mm Elephant Standard on Other side	Elephant Noise Control Systems Manual for these System Speci
E2TLa60	-M26	60/60/60	LB	42	41	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side	Conti
	-MS39	60/60/60	LB	45	44	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant Standard on Other side	ol S <sub>)</sub>
E3TLa60	-M33	60/60/60	LB	45	44	1 x 13mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	/sten
	-M39	60/60/60	LB	46	45	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	ns Ma
	-S46	60/60/60	LB	45	44	1 x 10mm Elephant Standard and 1 x 13mm Standard on One side 1 x 10mm Elephant Standard and 1 x 13mm Standard on Other side	anua
E4TLa60	-S52	60/60/60	LB	46	45	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	for
	-M40	60/60/60	LB	46	45	2 x 10mm Elephant MultiSmart on One sid 2 x 10mm Elephant MultiSmart on Other side	thes
E4TLa90	-M52	90/90/90	LB	48	47	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side	e Sys
Double T	imber I	rame Walls	- Load Be	earing	)		<u> </u>
	-S20	30/30/30	LB	50	49	1 x 10mm Elephant Standard on One side 1 x 10mm Elephant Standard on Other side	dS w
E2TDLa30	-S26	30/30/30	LB	52	51	1 x 13mm Elephant Standard on One side 1 x 13mm Elephant Standard on Other side	ecifi
	-M20	30/30/30	LB	52	51	1 x 10mm Elephant MultiSmart on One side 1 x 10mm Elephant MultiSmart on Other side	fication sheets
Single Ti	mber Fr	ame Walls w	ith Resil	ient N	/loun	t- Load Bearing	n s
E3TMLa30	-S30	30/30/30	LB	52	51	Frame Side: 1 x 10mm Elephant Standard Mount Side: 2 x 10mm Elephant Standard	heet
Single Ti	mber Fr	ame Walls w	ith Resil	ient F	ail- L	oad Bearing	S
	-S30	30/30/30	LB	47	46	Frame Side: 1 x 10mm Elephant Standard Rail Side: 2 x 10mm Elephant Standard	
E3TRLa30	-S39	30/30/30	LB	50	49	Frame Side: 1 x 13mm Elephant Standard Rail Side: 2 x 13mm Elephant Standard	
	-M30	30/30/30	LB	51	50	Frame Side: 1 x 10mm Elephant MultiSmart Rail Side: 2 x 10mm Elephant MultiSmart	
E3TRLa60	-MS39	60/60/60	LB	52	50	Frame Side: 1 x 13mm Elephant MultiSmart Rail Side: 2 x 13mm Elephant Standard	
LJINLAUU	-M39	60/60/60	LB	52	51	Frame Side: 1 x 13mm Elephant MultiSmart Rail Side: 2 x 13mm Elephant MultiSmart	

## Sub Intertenancy - Walls

System	Lining	Fire Rating	Load Bearing	Noise Control		Lining Requirements		
Number	Suffix	. iic nating	Ability	STC	Rw	Linny requirements	P	
Single St	eel Fran	ne Walls - No	on Load I	Bearir	ng		_	
E2Sa15	-S20	/15/15	NLB	40	39	1 x 10mm Elephant Standard on One side 1 x 10mm Elephant Standard on Other side		
	-S26	/30/30	NLB	41	40	1 x 13mm Elephant Standard on One side 1 x 13mm Elephant Standard on Other side		
E2Sa30	-M20	/30/30	NLB	42	41	1 x 10mm Elephant MultiSmart on One side 1 x 10mm Elephant MultiSmart on Other side		
	-S33	/30/30	NLB	43	42	1 x 13mm Elephant Standard on One side 2 x 10mm Elephant Standard on Other side		
E3Sa30	-S39	/30/30	NLB	44	42	1 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	'	
	-M30	/30/30	NLB	44	43	1 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side		
E4Sa45	-\$40	/45/45	NLB	45	44	2 x 10mm Elephant Standard on One side 2 x 10mm Elephant Standard on Other side		
E2Sa60	-M26	/60/60	NLB	43	42	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side		
	-MS39	/60/60	NLB	44	43	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant Standard on Other side		
E3Sa60	-M39	/60/60	NLB	45	44	1 x 13mm Elephant MultiSmart on One side		
	-\$46	/60/60	NLB	46	45	2 x 13mm Elephant MultiSmart on Other side  1 x 10mm Elephant Standard and 1 x 13mm Standard on One side		
E4Sa60	-S52	/60/60	NLB	48	47	1 x 10mm Elephant Standard and 1 x 13mm Standard on Other side 2 x 13mm Elephant Standard on One side		
	-M40	/60/60	NLB	48	47	2 x 13mm Elephant Standard on Other side 2 x 10mm Elephant MultiSmart on One side		
E4Sa90	-M46	/90/90	NLB	50	49	2 x 10mm Elephant MultiSmart on Other side  1 x 10mm Elephant MultiSmart and 1 x 13mm MultiSmart on One side		
E4Sa105	-M52	/105/105	NLB	52	51	1 x 10mm Elephant MultiSmart and 1 x 13mm MultiSmart on Other side 2 x 13mm Elephant MultiSmart on One side		
		ne Walls - Lo			J.	2 x 13mm Elephant MultiSmart on Other side		
E2SLa30	-M26	30/30/30	LB	43	42	1 x 13mm Elephant MultiSmart on One side		
EZ3La30	-10120	30/30/30	LD	43	42	1 x 13mm Elephant MultiSmart on Other side		
E3SLa30	-M39	30/30/30	LB	45	44	1 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side		
E4SLa30	-S40	30/30/30	LB	45	44	2 x 10mm Elephant Standard on One side 2 x 10mm Elephant Standard on Other side		
E4SLa45	-S52	45/45/45	LB	48	47	2 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side		
LTJLOTJ	-M40	45/45/45	LB	48	47	2 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side		
E4SLa60	-M52	60/60/60	LB	52	51	2 x 13mm Elephant MultiSmart on One side 2 x 13mm Elephant MultiSmart on Other side		
E4SLa90	-F64	90/90/90	LB	53	52	2 x 16mm Elephant FireSmart on One side 2 x 16mm Elephant FireSmart on Other side		
Double S	teel Fra	me Walls - N	lon Load	Bear	ing			
E2CD-22	-S26	/30/30	NLB	52	51	1 x 13mm Elephant Standard on One side 1 x 13mm Elephant Standard on Other side		
E2SDa30	-M20	/30/30	NLB	52	51	1 x 10mm Elephant MultiSmart on One side 1 x 10mm Elephant MultiSmart on Other side		

System Lining

Load

System Number	Lining Suffix	Fire Rating	Load Bearing	Con	trol	Lining Requirements	Page
- Tuniber	Juna		Ability	STC	Rw		
Steel Fra	me Wall	s with Resili	ent Rail-	Non	Load	Bearing	Pe
E3SRa30	-S39	/30/30	NLB	51	50	Frame Side: 1 x 13mm Elephant Standard Rail Side: 2 x 13mm Elephant Standard	ase
E35Ka3U	-M30	/30/30	NLB	51	50	Frame Side: 1 x 10mm Elephant MultiSmart Rail Side: 2 x 10mm Elephant MultiSmart	refer
F2CD-60	-MS39	/60/60	NLB	52	51	Frame Side: 1 x 13mm Elephant MultiSmart Rail Side: 2 x 13mm Elephant Standard	Please refer to the
E3SRa60	-M39	/60/60	NLB	53	52	Frame Side: 1 x 13mm Elephant MultiSmart Rail Side: 2 x 13mm Elephant MultiSmart	
Quiet Ste	eel Fram	ie Walls - No	n Load B	earin	g		<del>P</del>
F250-20	-S26	/30/30	NLB	47	46	1 x 13mm Elephant Standard on One side 1 x 13mm Elephant Standard on Other side	nant
E2SQa30	-M20	/30/30	NLB	48	47	1 x 10mm Elephant MultiSmart on One side 1 x 10mm Elephant MultiSmart on Other side	Elephant Noise
F350-30	-S39	/30/30	NLB	53	52	1 x 13mm Elephant Standard on One side 2 x 13mm Elephant Standard on Other side	
E3SQa30	-M30	/30/30	NLB	53	52	1 x 10mm Elephant MultiSmart on One side 2 x 10mm Elephant MultiSmart on Other side	ntrol
E3SQa45	-MS33	/45/45	NLB	52	51	1 x 13mm Elephant MultiSmart on One side 2 x 10mm Elephant Standard on Other side	Syst
E2SQa60	-M26	/60/60	NLB	50	49	1 x 13mm Elephant MultiSmart on One side 1 x 13mm Elephant MultiSmart on Other side	ems
Staggere	ed Steel	Stud Walls -	Non Loa	d Bea	aring		≥
E2SSa30	-S26	/30/30	NLB	50	49	1 x 13mm Elephant Standard on One side 1 x 13mm Elephant Standard on Other side	Control Systems Manual for
E23383U	-M20	/30/30	NLB	49	48	1 x 10mm Elephant MultiSmart on One side 1 x 10mm Elephant MultiSmart on Other side	for

1 x 10mm Elephant MultiSmart on Other side 1 x 13mm Elephant MultiSmart on One side

1 x 13mm Elephant MultiSmart on Other side

1 x 16mm Elephant FireSmart on One side

1 x 16mm Elephant FireSmart on Other side

## Sub Intertenancy - Floor/Ceilings

NLB

NLB

52

54

51

53

---/60/60


---/60/60

-M26

-F32

E2SSa60

System	Lining	Fire Rating	Load Bearing	Noise Control			Lining Requirements	
Number	Suffix	cg	Ability	STC	Rw	IIC		
Direct Fix Clip - Floor/Ceiling								
E1DFa15	-S13	15/15/15	LB	48	47	43-69	1 x 13mm Elephant Standard	
E2DFa30	-S26	30/30/30	LB	53	52	43-69	2 x 13mm Elephant Standard	
E1DFa45	-M13	45/45/45	LB	52	51	43-69	1 x 13mm Elephant MultiSmart	
E1DFa60	-F16	60/60/60	LB	52	51	43-69	1 x 16mm Elephant FireSmart	
Suspend	ded Gri	d Floor/Cei	ling					
E1SCa15	-S13	15/15/15	LB	48	47	39-62	1 x 13mm Elephant Standard	
E2SCa30	-S26	30/30/30	LB	53	52	42-67	2 x 13mm Elephant Standard	
E1SCa45	-M13	45/45/45	LB	51	50	43-69	1 x 13mm Elephant MultiSmart	
E1SCa60	-F16	60/60/60	LB	52	51	43-69	1 x 16mm Elephant FireSmart	



## INTRODUCTION

This manual provides details for construction of two way fire and acoustic walls and floor/ceilings with Elephant Plasterboard & Fibre Cement to provide fire protection as required by the NZBC clause C1 to C6 "Protection From Fire".

Elephant Plasterboard (NZ) Limited has many different combinations of two way fire and acoustic plasterboard & fibre cement wall and floor/ceiling fire rated systems. It is the responsibility of the specifier to accommodate the required performance of the building they are considering. The specifier should take into consideration both external and internal noise control and fire rating for occupants intended use. Special consideration must be taken in the construction process.

All construction details that have been provided in this manual are generic only and it is important that expert advice is sought to determine suitability in each individual project.

## **Limitations and Conditions of Use**

- · Elephant Plasterboard is intended for normal conditions of dry internal use.
- · Elephant Plasterboard must not be used for bracing applications in or around baths and shower areas.
- Elephant Plasterboard must not be exposed to liquid water or be installed in situations where extended exposures to humidity above 90% Relative Humidity are to be expected. Bathrooms, kitchens and laundries should have adequate ventilation or heating to avoid condensation build-up.
- A suitable surface finish (e.g. Vinyl wallpaper or gloss and semi-gloss alkyd paints) must be applied to Elephant Plasterboard in all areas where liquid water or high humidity can be expected.
- · Elephant Plasterboard must not be installed over a vapour barrier.
- Elephant Plasterboard must not be applied directly to masonry, concrete or solid plaster, unless timber strapping or steel furring channels
  are used.
- Elephant Plasterboard must not be exposed to temperatures of 52°C or greater for prolonged periods.
- · Elephant Plasterboard may not be used as an external lining.

## **New Zealand Building Code (NZBC) Compliance**

Elephant Plasterboard is manufactured to AS/NZS 2588 and has been specifically formulated to meet New Zealand Building Code requirements. Elephant Plasterboard has been marketed internationally since 1975 and the product has established an excellent history of performance for its use in buildings throughout New Zealand and the Asia/Pacific region. Elephant Plasterboard meets the durability requirements of the NZBC and is subject to use, installation and maintenance in accordance with the instructions outlaid in this manual. The Manufacturing plant is International Standard ISO 9001 and ISO 14001 registered.

## • NZBC Clause B1 Structure

Framing material specifications used with Elephant Plasterboard Systems must be in accordance with the performance requirements of NZBC Clause B1. Timber framed walls and floors must be installed and meet the requirements of NZS 3604.

## NZBC Clause B2 Durability

Elephant Plasterboard Fire, Noise Control & Bracing Systems have a serviceable life of not less than 50 years and so is in accordance to NZBC B2 3.1.

## • NZBC Clause C1-C6 Protection from Fire

Elephant Plasterboard Fire & Noise Control Systems can meet the requirements of providing passive fire protection as per NZBC Clause C1-C6.

## • NZBC Clause E3 Internal Moisture

Elephant Plasterboard Wet Area Systems can meet the requirements of NZBC Acceptable Solution E3/AS1.

## NZBC Clause F2 Hazardous Building Materials

Elephant Plasterboard Systems meet this requirement of NZBC Clause F2 and will not present a health hazard to people.

## NZBC Clause G6 -Airborne & Impact Sound

Elephant Plasterboard Noise Control Systems entitled 'Full Intertenancy' (STC 55 or greater) systems meet the requirements of NZBC Clause G6.



## INTRODUCTION

## Fire Resistance Ratings (FRR)

To prevent fire spread or structural collapse, the Acceptable Solutions require building elements to have fire resistance ratings (FRRs). The level of FRR required depends on the risk group of the building.

## **FRR** components

An FRR comprises three numbers: these give time values in minutes for structural adequacy, integrity and insulation. Eg. --/60/60 (a/b/c). Primary and secondary elements required to have an FRR will, depending on their function, need to satisfy one or more of these three criteria as follows:

- a) **Structural Adequacy**: usually provided by primary elements within a fire cell. These include building elements which are part of the structure, and those providing support to other elements with an FRR within the same or adjacent fire cells. Examples are: columns, beams, floors and walls (which may also be fire separations).
- b) **Integrity**: usually provided by secondary elements. Examples are fire separations, which are internal partitions and floors, areas of external walls not permitted to be an unprotected area, and some areas of roofs when close to another building or crossed by an exit way. Primary elements forming an integral part of a fire separation are also rated for integrity.
- c) **Insulation**: applies to fire separations and is required where the transmission of heat through the element may endanger occupants on the other side or cause fire to spread to other fire cells or adjacent buildings. For example, insulation is necessary for fire separations between sleeping spaces, where protecting a safe path or through external walls.

Elephant Plasterboard Fire Rated Systems have numerous system combinations as outlined in this manual. All Elephant Plasterboard Fire Rated systems have been tested or internally assessed or have opinions provided by independent accredited quality assurance organisations like "The Building Research Association of New Zealand (BRANZ)".

## **Internal Lining Surface Finish Properties**

Elephant Plasterboard has been tested at BRANZ in accordance with ISO 5660 Reaction to fire tests (Heat release, smoke production and mass loss rate) Part 1: Heat release rate (cone calorimeter method); and ISO 5660 Reaction to fire tests (Heat release, smoke production and mass loss rate) Part 2: Smoke production rate (dynamic measurement).

A Group Number Classification of **1-S** was achieved in Fire test FH 5695-TT for all Elephant Plasterboard paper faced sheet linings. This classification only applies to Elephant Plasterboard paper faced sheet linings without paint or wallpaper finish. Contact the surface finish suppliers for group number information for their products.

'Group Number 1-S' is the highest performance expectation under 'Part 4. Control of Internal Fire and Smoke Spread' clause C/AS2 to C/AS7 of the NZBC. It means an Elephant Plasterboard paper faced sheet lining can be specified for use in any risk group application.

## **Control Of External Fire Spread**

External spread of fire applies where:

- The building height is greater than 10m and upper floors have sleeping uses or are different property, refer to clause C3.5 of the NZBC;
- The building is located within 1m of a relevant boundary, refer to clause C3.7 of the NZBC.

Refer to Table 5.1 of Section 5.4 of C/AS1 and Table 5.5 of Section 5.8.1 of C/AS2 for the information about various risk groups to identify the external fire spread safety requirement applicable to the exterior surface finishes.

For the situations where 'no requirement' is listed in the compliance documents, James Hardie cladding systems installed over a flexible underlay as per the information published in the James Hardie Technical Specification Literature complies. See page 13 for list of relevant James Hardie Technical Literature

For the other situations, James Hardie claddings in conjunction with RAB $^{\text{TM}}$  Board fixed into timber frame with R2.2 fibreglass insulation/James Hardie Mineral Insulation complies.

In addition, for buildings over 10m in height, the external wall cavity must be blocked off either at each floor level or at heights no more than 3.5m to prevent fire spread within the cavity. Refer to latest James Hardie Fire & Acoustic Design Manual - Figure 7: Intertenancy Fire Separation, for the horizontal joint detail to create a fire separation in conjunction with James Hardie claddings.

For construction details of James Hardie claddings with RAB™ Board, Ask James Hardie on 0800 808 868.



Version update: February 2023

## **Elephant Plasterboard & Fibre Cement Fire Rated Walls**

Elephant Plasterboard & Fibre Cement Fire Rated Systems have been tested on timber & steel frame walls as Load Bearing (LB)

Stud heights, stud spacings, load and framing dimensions for Load Bearing (LB) Timber framed walls are determined by the NZBC, and NZS 3604. Heights greater than what is defined in NZS 3604 will need specific design by a structural engineer.

Minimum framing of 90 x 45mm shall be used with a maximum stud spacing of 600mm. Nogs to be spaced at 800mm maximum. Minimum framing depth as per fire and acoustic system selected or the structural requirements whichever is greater. All sheet edges must be supported by framing timber. Timber framing treatment to comply with the minimum requirements of NZS 3602. When framing at 140 x 45mm the maximum stud spacing 600mm.

## **External Walls**

Minimum framing & maximum stud spacings according to the table provided on figure EFC-001. Nogs to be spaced at 800mm maximum. Minimum framing depth as per fire and acoustic system selected or the structural requirements whichever is greater. All sheet edges must be supported by framing timber. Timber framing treatment to comply with the minimum requirements of NZS 3602.

Floor joists of minimum 45mm width to be used. Strutting of floor joist as per NZS 3604 is required. Bottom plate fixing in timber floors must penetrate through floor into joists or solid blocking.

## Steel Frame

Steel framing for fire rated walls must be in accordance with NASH standard for residential and low rise buildings and AS/NZ 1170 standards. Steel frame must comply with the durability requirements of NZBC. Steel sections shall be galvanized/zinc coated and have a base metal thickness (BMT) 0.55mm minimum for non-load bearing walls and 0.75mm minimum for load bearing walls and 1.6mm maximum. A minimum of 89mm deep x 36mm wide steel stud framing to be used in external walls. Maximum stud spacing at 400mm centres. Nogs to be spaced at 800mm centres maximum. All sheet edges must be formed over and supported by framing.

All steel framing must be used according to their manufacturer's instructions. Steel framing properties vary considerably depending upon the grade of steel used. It is the designer's responsibility to ensure the type of framing selected is fit for purpose and suitable to carry design loads.

## **Thermal Fire Batten**

Fire battens are used on all FRR steel stud systems and must be used between James Hardie cladding and steel framing face. For steel framing in interior/exterior applications the NZBC also requires additional external insulation to achieve adequate thermal resistance.

Refer to James Hardie Fire and Acoustic Design Manual for correct assembly and installation of Thermal Fire Battens.

These insulated battens are assembled on site by cutting a 100mm wide strip from 9mm thick EasyLap™ Panel and adhering a 10mm thick x 100mm wide XPS (extruded polystyrene) on its face. All fire battens are fixed horizontally and vertically to all steel members. All battens must be neatly cut and tightly fitted covering all steel members. All thermal fire battens must be fitted with the polystyrene to the exterior face. The batten is tacked to the steel framing as shown in the following detail.

## Structural Steel Members in Fire Rated Walls

Structural steel members such as columns or beams are sometimes located inside the cavities of two way fire rated wall or floor/ceiling systems. The FRR of the two way fire rated system applies across the entire element, from exposed side to the unexposed side. The temperature inside the cavity can rise above the critical temperature level for structural steel members resulting in premature buckling. Therefore by containing a structural steel member within a two way fire system, it cannot be automatically assumed that the structural steel member will maintain it's structural integrity of the two way fire system within which it is contained. Hence, either reference should be made to the column and beam section of the Elephant Fire Rated System Manual for further information on protection of structural steel members. Alternatively, when the column and beam section of the Elephant Fire Rated System Manual is impractical, structural steel members must be independently fire rated with e.g. Intumescent paints.

## **Cavity Insulation**

In order to achieve the stated fire ratings in this manual all cavities must be filled with an insulation material regardless if its an internal or external wall.

## **Glass wool Insulation**

Any brand of R2.2 glass wool insulation with a weight between 12-18kg/m³ may be used. This insulation can be substituted with a higher R-value fibreglass insulation to achieve higher insulation requirements.

## **James Hardie Mineral Insulation**

In a fire rated system where a mineral insulation is specified, only James Hardie Mineral Insulation must be used. James Hardie Mineral Insulation cannot be substituted with any other insulation material. Refer to the James Hardie Mineral Insulation Technical Supplement for

Also refer to clause H1 of the NZBC for further information on R-value Requirement



## **Fire Retardant Flexible Underlay**

All external walls must have a fire retardant flexible underlay or a rigid air barrier installed beneath the cladding.

In a FRR system, any flexible underlay that complies with Table 23 of E2/AS1 and has a Flammability Index not exceeding 5, when tested to AS 1530.2 may be used. Installation of a flexible underlay must be in accordance with the manufacturer's recommendations and their installation instructions.

## **Rigid Air Barrier**

James Hardie RAB™ Board can be used to achieve the published fire ratings stated in this manual. Refer to James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual for information regarding its installation.

For EH wind zone or Specific Engineering Design (SED) projects where the design wind pressures are between 1.5kPa (ULS) and 2.5kPa (ULS), James Hardie RAB™ Board must be used.

In addition, for buildings over 10m in height, the external wall cavity must be blocked off either at each floor level or at heights no more than 3.5m to prevent fire spread within the cavity. Refer to latest James Hardie Fire & Acoustic Design Manual - Figure 7: Intertenancy Fire Separation, for the horizontal joint detail to create a fire separation in conjunction with James Hardie claddings.

Flexible underlay is not required when using James Hardie RAB™ Board.

For construction details of James Hardie claddings with RAB™ Board, Ask James Hardie on 0800 808 868.

## **Elephant QuickBrace System**

The bracing systems specified in the Elephant QuickBrace Systems Manual can easily be combined with the Elephant Fire Rated Systems by adhering to the details outlined for the relevant Bracing system type and relevant Fire Rated System requirements.

For Single layered Fire Rated systems, use the QuickBrace fastening pattern and the required screw length of the Fire Rated Systems. For Double layered Fire Rated systems, the bracing sheet can be either:

- The Inner sheet fixed directly to the framing. Use the QuickBrace fastening pattern and the required screw length of the Fire Rated System. The inner layer can be left unstopped; or
- · The Outer sheet. Use the QuickBrace fastening pattern and the required screw length of the Fire Rated System.

## **Elephant Plasterboard & Fibre Cement Fire Rated Floor/Ceiling**

Elephant Plasterboard & Fibre Cement Fire Rated Systems have been tested on Load bearing floor/ceiling systems. Refer to this manual for fixings and layer combinations. Ceiling linings must be mechanically fixed. Glue may not be substituted for mechanical fixing if used in a passive fire system. Screw lengths, spacings and type as defined by this manual must be used.

## Timber Joists

Floor/ceiling system as defined in NZS 3604 for floor loadings (2.0 kPa or 3.0 kPa) may be used. Consult NZS 3604 latest edition for floor joist spans. Floor joists must have a minimum of 190mm depth x 45mm width and a maximum spacing of 600mm centres. Consult the appropriate supplier's technical information for design strength and serviceability.

## Steel Joists

Steel floor joists shall be a minimum depth of 190mm C-section with 45mm flanges and a steel gauge of 1.6mm minimum. Joists to be spaced at no more than 600mm centres.

## Flooring

Floor/Ceiling system must have a floor that is at least 20mm thick particle board complying with AS/NZS 1860 Part 1: 2017 or minimum 17mm thick structural ply complying with AS/NZS 2269 Part 0: 2012 fixed to the floor joists as per manufacturer's installation instructions.

## Floating Floor

The floating floor systems must be either 19mm James Hardie Tongue & Groove Secura™ Interior Floor or 20mm Tongue & Groove Particle Board complying to AS/NZS 1860.

## **Post Fire Stability**

The fire rated walls built close to boundary are required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4. The bottom plate of these walls acan be fixed in accordance with the post fire stability details published in this design manual on page 72, using Pryda Brace anchor brackets on either side og the stud.

For steel framing, post fire stability must be as per SED.



Version update: February 2023

## **Product & Component Substitution**

When a product specified in a system as per this manual is substituted, the performance of the system will be compromised. Therefore the materials specified in the system must not be substituted. Elephant Plasterboard (NZ) Limited does not take any liability if substitution of components are implemented in any Elephant Plasterboard Systems without consultation.

## **Elephant Plasterboard Substitution Options**

The table below indicates which products can substitute the original Elephant Plasterboard type specified.

- ✓ indicates that the FRR performance will be maintained
- X indicates that the FRR performance will be lower and so therefore the substitution is not allowed

Original Elephant	Elephant Plasterboard Substitution Options - FRR performance										
Plasterboard	Stan	Standard		FireSmart			MultiSmart		AquaSmart		
specified	10mm	13mm	10mm	13mm	16mm	10mm	13mm	10mm	13mm		
10mm Standard	✓	<b>✓</b>	✓	✓	<b>√</b>	✓	✓	✓	✓		
13mm Standard	х	<b>✓</b>	Х	<b>✓</b>	✓	✓	✓	✓	✓		
10mm FireSmart	Х	✓	✓	✓	✓	✓	✓	✓	✓		
13mm FireSmart	Х	Х	Х	<b>✓</b>	✓	Х	✓	Х	✓		
16mm FireSmart	х	Х	Х	х	<b>√</b>	Х	Х	Х	Х		
10mm MultiSmart	х	Х	Х	✓	<b>✓</b>	<b>√</b>	<b>√</b>	✓	<b>✓</b>		
13mm MultiSmart	Х	х	Х	<b>✓</b>	✓	Х	<b>✓</b>	Х	<b>✓</b>		



## **James Hardie Cladding Options & Technical Literature**

The James Hardie product layout and installation must be in accordance with the relevant James Hardie product literature for the cladding selected. Refer to the table below for limitations and relevant James Hardie product technical literature.


Linea™ Weatherb	ooard					
	Timber Cavity Batten		Direct Fix			
	Cavity Battens ed for buildings over 10 atherboard Cavity Fix Te		- Refer to Linea™ Weatherboard Direct Fix Technical Specification			
Linea™ Oblique™	<sup>1</sup> Weatherboard					
Horizontal fixing	r Cavity Battens red for buildings over 10 blique™ Weatherboard I	om or EH wind zone Horizontal Installation Te	chnical S	Specification		
Vertical fixing	- RAB™ Board requi - Refer to Linea™ O					
Stria™ Cladding	1					
Horizontal fixing	r Cavity Battens red for buildings over 10 Idding Timber Cavity Bat	0m or EH wind zone atten Horizontal Technical Specification				
Vertical fixing	Hardie Horizontal Timbe red for buildings over 10 adding Vertical Technical	0m or EH wind zone				
Horizontal fixing CLD™ Structural Batten	- Install over CLD™	t be used to achieve fire ratings ¹ Structural Cavity Battens adding CLD™ Structural Cavity Batten Technical Specification				
Axon™ Panel & I	EasyLap™ Panel					
Timber Ca	vity Batten	Dire	- RAB™ Board must be used to acl fire ratings d to CLD™ Structural nical Specification - Refer to Axon™ Panel EasyLap™ Direct Fixed & Fixed to CLD™ Str		CLD™ Structural Batten	
- RAB™ Board require over 10m or EH wind - Refer to Axon™ Pand Panel Timber Cavity Specification	d zone el & EasyLap™	- Refer to Axon™ Par Direct Fixed & Fixec Cavity Batten Techr			R™ Board must be used to achieve ratings er to Axon™ Panel EasyLap™ Panel ect Fixed & Fixed to CLD™ Structural ity Batten Technical Specification	
Hardie™ Plank W	eatherboards		Hardie™ Flex She	eet		
- Install over Timber Cavity Battens - Refer to Hardie™ Plank Weatherboard Technical Specification  ExoTec™ Facade Panel			- Install over Timber Cavity Battens - Refer to Hardie™ Flex Sheet Technical Specification  Villaboard™ Lining RAB™ Board			
					RAB™ Board	
- RAB™ Board must b - Install over Top Hat - Refer to ExoTec™ Fa Specification	_	- Refer Villaboard™ Lining Installation Manual - For internal applications only		- Refer HomeRAB™ Pre-Cladding & RAB™ Board Installation Manual - Cannot be used as a weathertigh cladding.		



Version update: February 2023


## Nomenclature:

## **Elephant Specification Reference - Fire Wall with Fibre Cement**

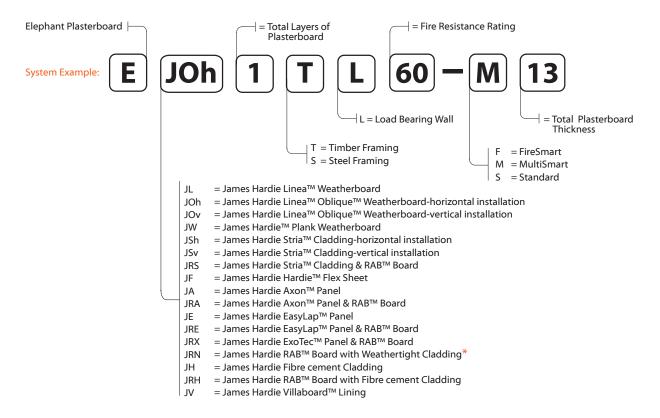

\*Note1: It is also important to consider that the fire properties of the external cladding is in accordance with NZBC C/VM1 or C/AS documents. Refer to Table 5.1 of Section 5.4 of C/AS1 and Table 5.5 of Section 5.8.1 of C/AS2 for the information about various risk groups to identify the external fire spread safety requirement applicable to the exterior surface finishes.

## **Elephant Specification Reference - Floor/Ceiling with Fibre Cement**

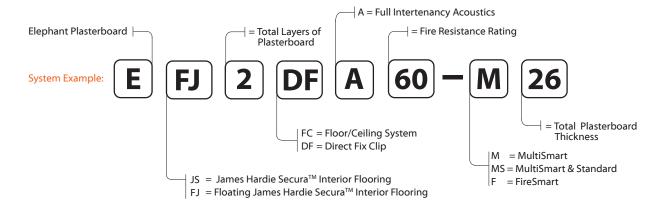

www.elephantplasterboard.co.nz

## External Timber Frame Walls

EJL1TL30

EPB & James Hardie Linea™ Weatherboard

Two Way FRR

## External Wall - Timber Frame

## **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJL1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie Linea™ Weatherboard to External side

## Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

## Underlay

For the type of allowable underlay refer to table below.

		EH Wind Zone	Other Wind Zone
В	Buildings < 10m	RAB	Flexible Underlay
В	uildings >10m	RAB	RAB

## **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

## RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 200mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

## Cavity Batten

When Cavity Batten is required, use a nominal 20mm Timber Cavity Batten. Refer to Linea<sup>TM</sup> Weatherboard Cavity Fix Technical Specification for installation instructions. When Cladding can be directly fixed without a cavity batten then a fire retardant flexible underlay must be used (if allowable). Refer to Linea<sup>TM</sup> Weatherboard Direct Fix Technical Specification.

## **Linea™ Weatherboard Cladding**

James Hardie Linea<sup>™</sup> Weatherboard cladding to external side of the timber framing. Consider the nail length required depending on the type of fixing i.e. Cavity fixing or Direct fixing. Refer to both Linea<sup>™</sup> Weatherboard Cavity Fix Technical Specification and Linea<sup>™</sup> Weatherboard Direct Fix Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

## Wall Insulation

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

## **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

## **Fixing of Elephant Plasterboard Internal Linings**

## **Fasteners**

41mm x 6g High Thread Drywall Screws


## **Fastener Centres**


Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

## Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.



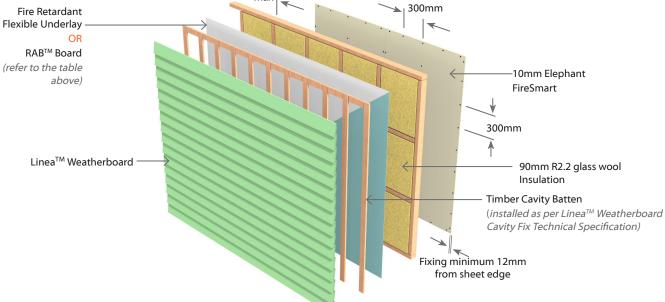

N.B. The above drawings are for illustrative purposes only

EJL1TL60

EPB & James Hardie Linea™ Weatherboard

Two Way FRR

## External Wall - Timber Frame

## Load Bearing

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJL1TL60	-M13	60/60/60	R2.2 glass wool	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie Linea™ Weatherboard to Other side

## Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

## **Underlay**

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

## **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

## RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 200mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

## **Cavity Batten**

When Cavity Batten is required, use a nominal 20mm Timber Cavity Batten. Refer to Linea<sup>™</sup> Weatherboard Cavity Fix Technical Specification for installation instructions. When Cladding can be directly fixed without a cavity batten then a fire retardant flexible underlay must be used (if allowable). Refer to Linea $^{\rm TM}$  Weatherboard Direct Fix Technical Specification.

## **Linea™ Weatherboard Cladding**

James Hardie Linea<sup>™</sup> Weatherboard cladding to external side of the timber framing. Consider the nail length required depending on the type of fixing i.e. Cavity fixing or Direct fixing. Refer to both Linea<sup>TM</sup> Weatherboard Cavity Fix Technical Specification and Linea<sup>TM</sup> Weatherboard Direct Fix Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

## **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

## **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

## **Fixing of Elephant Plasterboard Internal Linings**

## **Fasteners**

41mm x 6g High Thread Drywall Screws

## **Fastener Centres**

When using RAB™ Board


Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

## Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

When using Fire Retardant Flexible Underlay

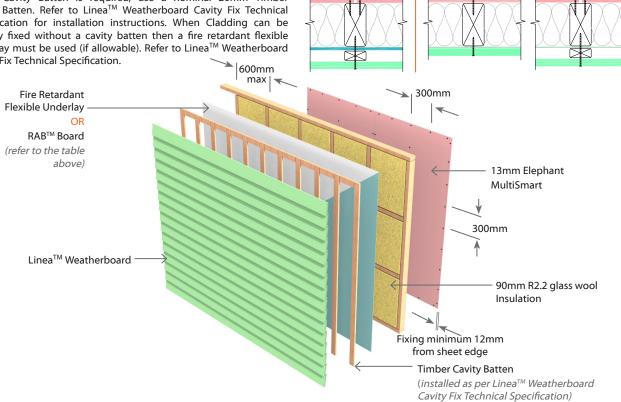

N.B. The above drawings are for illustrative purposes only.



Version update: February 2023

EJOh1TL30

EPB & James Hardie Linea™ Oblique™ Weatherboard - Horizontal

Two Way FRR

## External Wall - Timber Frame

## **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJOh1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side  James Hardie Linea™ Oblique™ Weatherboard horizontal to External side

## Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

## Underlay

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

## **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

## RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use  $40 \times 2.8$ mm fibre cement nail at 200mm centres 9mm RAB<sup>TM</sup> Board: Use  $50 \times 2.8$ mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home  $RAB^{TM}$  Pre-Cladding &  $RAB^{TM}$  Board Installation Manual.

## **Linea<sup>™</sup> Oblique<sup>™</sup> Weatherboard Cladding** - Horizontal

James Hardie Linea™ Oblique™ Weatherboard cladding fixed horizontally to external side of the timber framing. Refer to both Linea™ Oblique™ Horizontal Installation Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

## **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

## **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

## Fixing of Elephant Plasterboard Internal Linings

## **Fasteners**

41mm x 6g High Thread Drywall Screws


## **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

## **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

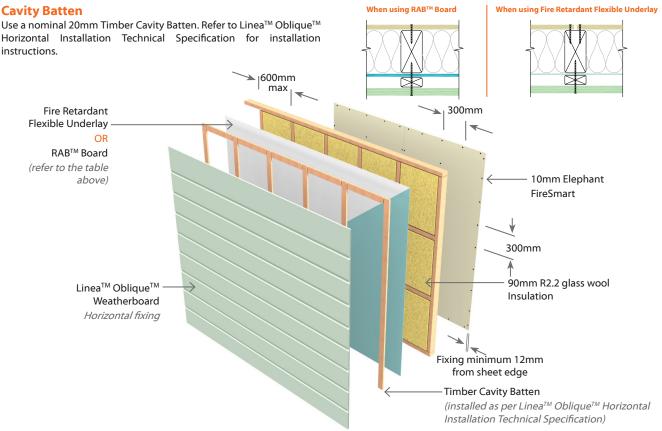

N.B. The above drawings are for illustrative purposes only



EJOv1TL30

EPB & James Hardie Linea<sup>™</sup> Oblique<sup>™</sup> Weatherboard - Vertical

Two Way FRR

## External Wall - Timber Frame

## **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJOv1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie Linea™ Oblique™ Weatherboard vertical to External side

## Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

## **Underlay**

For the type of allowable underlay refer to table below.

		EH Wind Zone	Other Wind Zone
I	Buildings < 10m	RAB	Flexible Underlay
I	Buildings >10m	RAB	RAB

## **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

## RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing.  $6mm\,RAB^{TM}\,Board: Use\,40\,x\,2.8mm\,fibre\,cement\,nail\,at\,200mm\,centres\\ 9mm\,RAB^{TM}\,Board: Use\,50\,x\,2.8mm\,fibre\,cement\,nail\,at\,200mm\,centres\\ Fixing to be\,12mm\,from\,sheet\,edges$ 

Reference to be made to the James Hardie Home RAB  $^{\rm TM}$  Pre-Cladding & RAB  $^{\rm TM}$  Board Installation Manual.

## **Linea<sup>™</sup> Oblique<sup>™</sup> Weatherboard Cladding - Vertical**

James Hardie Linea™ Oblique™ Weatherboard cladding fixed vertically to external side of the timber framing. Refer to both Linea™ Oblique™ Vertical Installation Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

## **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

## **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

## **Fixing of Elephant Plasterboard Internal Linings**

## **Fasteners**

41mm x 6g High Thread Drywall Screws


## **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

## **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

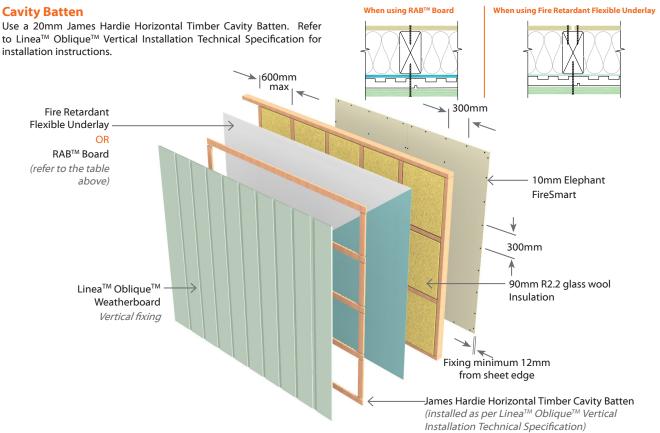

N.B. The above drawings are for illustrative purposes only.



Version update: February 2023

EJOh1TL60

EPB & James Hardie Linea™ Oblique™ Weatherboard - Horizontal

Two Way FRR

## External Wall - Timber Frame

## **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJOh1TL60	-M13	60/60/60	R2.2 glass wool	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie Linea™ Oblique™ Weatherboard horizontal to External side

## Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

## Underlay

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone		
Buildings < 10m	RAB	Flexible Underlay		
Buildings >10m	RAB	RAB		

## Fire Retardant Flexible Underlay

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

## RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 200mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding  $\&\ RAB^{\tiny{TM}}\ Board\ Installation\ Manual.$ 

## **Cavity Batten**

Horizontal Installation Technical Specification for installation instructions.

## **Linea<sup>™</sup> Oblique<sup>™</sup> Weatherboard Cladding** - Horizontal

James Hardie Linea™ Oblique™ Weatherboard cladding fixed horizontally to external side of the timber framing. Refer to both Linea<sup>™</sup> Oblique<sup>™</sup> Horizontal Installation Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

## **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

## **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

## **Fixing of Elephant Plasterboard Internal Linings**

## **Fasteners**

41mm x 6g High Thread Drywall Screws

When using RAB™ Roard

## **Fastener Centres**


Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

## Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

When using Fire Retardant Flexible Underlay

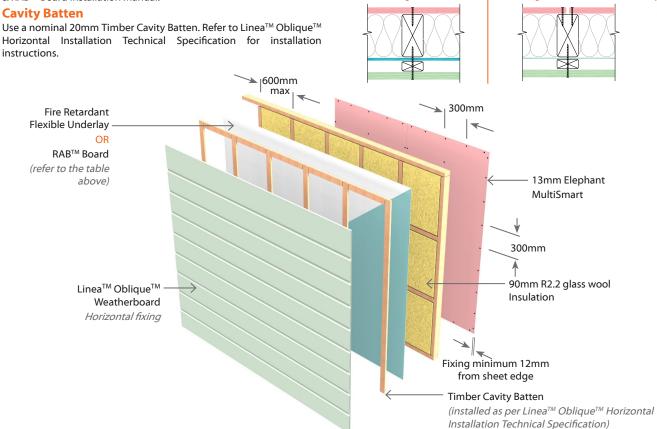

N.B. The above drawings are for illustrative purposes only



# EJOv1TL60

EPB & James Hardie Linea™ Oblique™ Weatherboard - Vertical

Two Way FRR

#### External Wall - Timber Frame

## **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJOv1TL60	-M13	60/60/60	R2.2 glass wool	ool 47	1 x 13mm Elephant MultiSmart on Internal side James Hardie Linea™ Oblique™ Weatherboard vertical to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### Underlay

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

#### **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing.  $6mm\,RAB^{TM}\,Board: Use\,40\,x\,2.8mm\,fibre\,cement\,nail\,at\,200mm\,centres\\ 9mm\,RAB^{TM}\,Board: Use\,50\,x\,2.8mm\,fibre\,cement\,nail\,at\,200mm\,centres\\ Fixing to be\,12mm\,from\,sheet\,edges$ 

Reference to be made to the James Hardie Home RAB  $^{\rm TM}$  Pre-Cladding & RAB  $^{\rm TM}$  Board Installation Manual.

# $\textbf{Linea}^{\text{TM}}\,\textbf{Oblique}^{\text{TM}}\,\textbf{Weatherboard}\,\textbf{Cladding}\,\textbf{-}\,\textbf{Vertical}$

James Hardie Linea<sup>™</sup> Oblique<sup>™</sup> Weatherboard cladding fixed vertically to external side of the timber framing. Refer to both Linea<sup>™</sup> Oblique<sup>™</sup> Vertical Installation Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

## **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

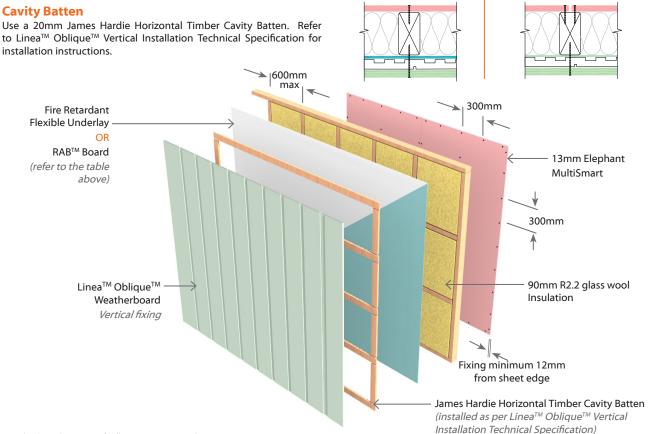



N.B. The above drawings are for illustrative purposes only.

EJW1TL30

EPB & Hardie™ Plank Weatherboard

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJW1TL30	-F10	30/30/30	R2.2 glass wool	45	1 x 10mm Elephant FireSmart on Internal side Hardie™ Plank Weatherboard to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### **Underlay**

#### **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### **Cavity Batten**

When Cavity Batten is required, use a nominal 20mm Timber Cavity Batten. Refer to Hardie™ Plank Weatherboards Technical Specification for installation instructions.

When Cladding can be directly fixed without a cavity batten then a fire retardant flexible underlay must be used.

#### Hardie<sup>™</sup> Plank Weatherboard Cladding

Hardie<sup>™</sup> Plank Weatherboard cladding to external side of the timber framing. Consider the nail length required depending on the type of fixing i.e. Cavity fixing or Direct fixing. Refer to both Hardie<sup>™</sup> Plank Weatherboards Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

## **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# Fixing of Elephant Plasterboard Internal Linings

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

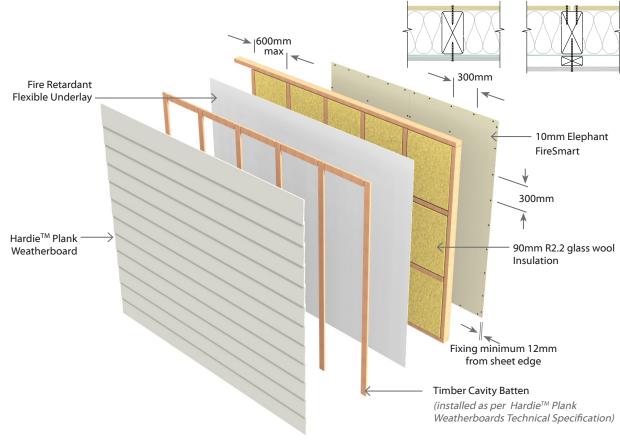

N.B. The above drawings are for illustrative purposes only



EJW1TL60

EPB & James Hardie™ Weatherboard

Two Way FRR

## External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJW1TL60	-M13	60/60/60	Hardie™ Mineral	46	1 x 13mm Elephant MultiSmart on Internal side Hardie™ Plank Weatherboard to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### Underlay

#### **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### **Cavity Batten**

When Cavity Batten is required, use a nominal 20mm Timber Cavity Batten. Refer to Hardie™ Plank Weatherboards Technical Specification for installation instructions.

When Cladding can be directly fixed without a cavity batten then a fire retardant flexible underlay must be used.

#### Hardie<sup>™</sup> Plank Weatherboard Cladding

Hardie<sup>™</sup> Plank Weatherboard cladding to external side of the timber framing. Consider the nail length required depending on the type of fixing i.e. Cavity fixing or Direct fixing. Refer to both Hardie<sup>™</sup> Plank Weatherboards Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie  $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# Fixing of Elephant Plasterboard Internal Linings

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

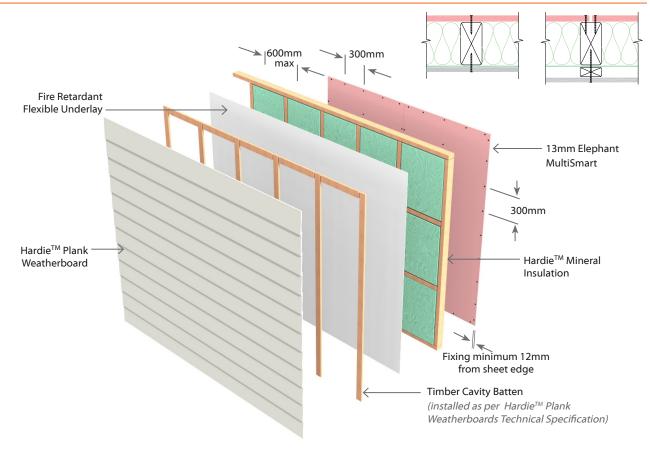

N.B. The above drawings are for illustrative purposes only.



EJSh1TL30

EPB & James Hardie Stria<sup>™</sup> Cladding - Horizontal

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJSh1TL30	-F10	30/30/30	R2.2 glass wool	. 46	1 x 10mm Elephant FireSmart on Internal side James Hardie Stria™ Cladding horizontal to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### **Underlay**

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

#### Fire Retardant Flexible Underlay

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use  $40 \times 2.8$ mm fibre cement nail at 200mm centres 9mm RAB<sup>TM</sup> Board: Use  $50 \times 2.8$ mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

# James Hardie Stria™ Cladding - Horizontal

James Hardie Stria™ Cladding fixed horizontally to external side of the timber framing. Refer to both Stria™ Cladding Timber Cavity Batten Horizontal Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### Wall Insulation

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

#### Fixing of Elephant Plasterboard Internal Linings Fasteners

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

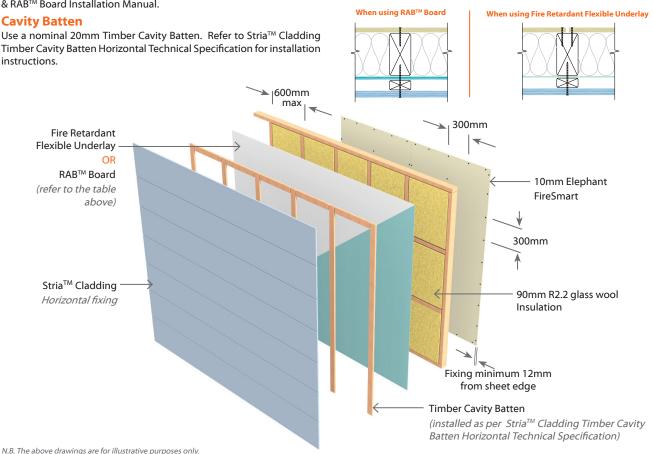

EJSv1TL30

EPB & James Hardie Stria™ Cladding - Vertical

Two Way FRR

#### External Wall - Timber Frame

## Load Bearing

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJSv1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side James Hardie Stria™ Cladding vertical to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### Underlay

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

#### Fire Retardant Flexible Underlay

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 200mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

#### James Hardie Stria<sup>™</sup> Cladding - Vertical

James Hardie Stria<sup>™</sup> Cladding fixed vertically to external side of the timber framing. Refer to both Stria™ Cladding Vertical Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

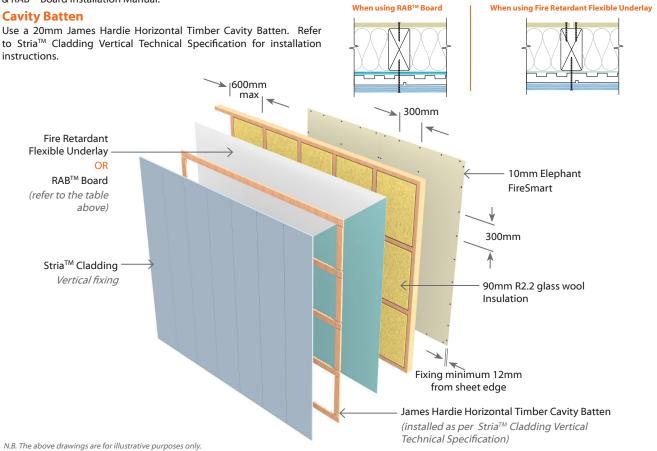



EJSh1TL60

EPB & James Hardie Stria<sup>™</sup> Cladding - Horizontal

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJSh1TL60	-M13	60/60/60	R2.2 glass wool	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie Stria™ Cladding horizontal to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### **Underlay**

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

#### **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 200mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

#### James Hardie Stria™ Cladding - Horizontal

James Hardie Stria™ Cladding fixed horizontally to external side of the timber framing. Refer to both Stria™ Cladding Timber Cavity Batten Horizontal Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

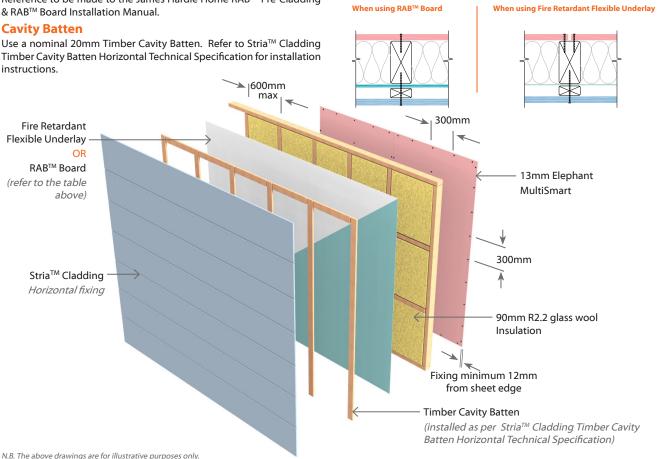



EJSv1TL60

EPB & James Hardie Stria™ Cladding - Vertical

Two Way FRR

#### External Wall - Timber Frame

## Load Bearing

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJSv1TL60	-M13	60/60/60	R2.2 glass wool	47	1 x 13mm Elephant MultiSmart on Internal side James Hardie Stria™ Cladding vertical to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### **Underlay**

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

#### **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™: Use 40 x 2.8mm fibre cement nail at 200mm centres 9mm RAB™: Use 50 x 2.8mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Cavity Batten Use a 20mm James Hardie Horizontal Timber Cavity Batten. Refer

# James Hardie Stria™ Cladding - Vertical

James Hardie Stria<sup>™</sup> Cladding fixed vertically to external side of the timber framing. Refer to both Stria™ Cladding Vertical Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

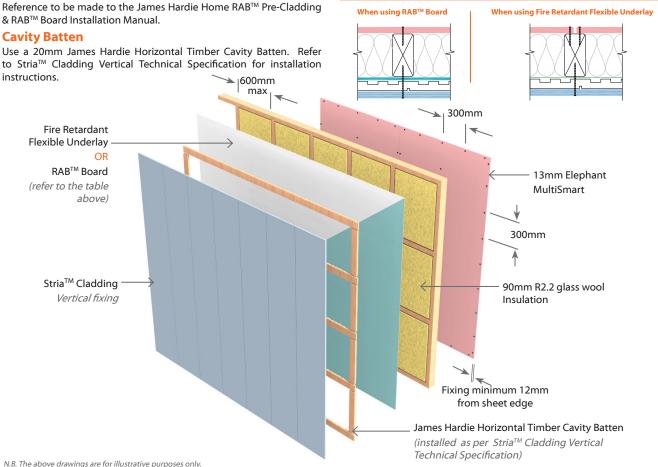



Two Way FRR

EJRS1TL30

EPB & James Hardie Stria™ Cladding & RAB™ Board with CLD™ Battens

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRS1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side  James Hardie Stria™ Cladding and RAB™ Board with  CLD™ Structural Cavity Batten to External side

## Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- $\bullet$  Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### **Underlay**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing.  $6mm\,RAB^{TM}\,Board: Use\,40\,x\,2.8mm\,fibre\,cement\,nail\,at\,150mm\,centres\\ 9mm\,RAB^{TM}\,Board: Use\,50\,x\,2.8mm\,fibre\,cement\,nail\,at\,150mm\,centres\\ Fixing to be 12mm\,from\,sheet\,edges$ 

Reference to be made to the James Hardie Home  $RAB^{TM}$  Pre-Cladding &  $RAB^{TM}$  Board Installation Manual.

#### **Cavity Batten**

Use  $70^{\circ}$ X 19mm CLD<sup>TM</sup> Structural Cavity Batten. Refer to Stria<sup>TM</sup> Cladding CLD Structural Cavity Batten Technical Specification for installation instructions.

#### James Hardie Stria™ Cladding

James Hardie Stria™ Cladding fixed horizontally to external side of the timber framing. Refer to both Stria™ Cladding CLD Structural Cavity Batten Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### Wall Insulation

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

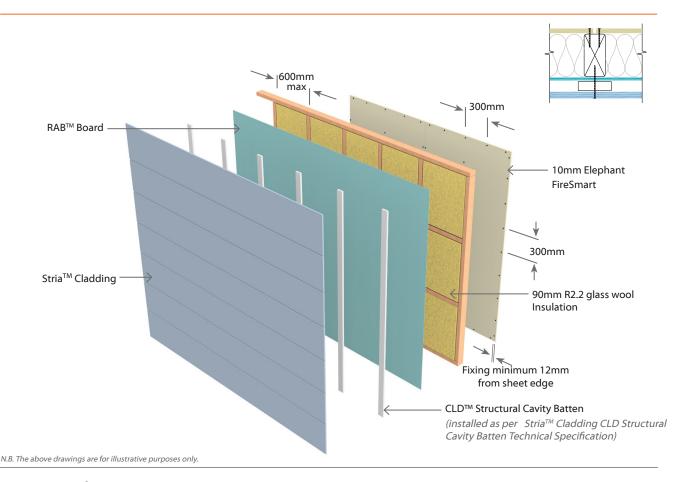



EJRS1TL60

EPB & James Hardie Stria™ Cladding & RAB™ Board with CLD™ Battens

#### External Wall - Timber Frame

# **Load Bearing**

Two Way FRR

System Numbe	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRS1TL60	-M13	60/60/60	Hardie™ Mineral	47	1 x 13mm Elephant MultiSmart on Internal side  James Hardie Stria™ Cladding and RAB™ Board with  CLD™ Structural Cavity Batten to External side

## Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

# **Underlay**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing.  $6mm\,RAB^{TM}\,Board: Use\,40\,x\,2.8mm\,fibre\,cement\,nail\,at\,150mm\,centres\\ 9mm\,RAB^{TM}\,Board: Use\,50\,x\,2.8mm\,fibre\,cement\,nail\,at\,150mm\,centres\\ Fixing to be\,12mm\,from\,sheet\,edges$ 

Reference to be made to the James Hardie Home  $RAB^TM$  Pre-Cladding &  $RAB^TM$  Board Installation Manual.

#### **Cavity Batten**

Use 70 x 19mm CLD™ Structural Cavity Batten. Refer to Stria™ Cladding CLD Structural Cavity Batten Technical Specification for installation instructions.

#### James Hardie Stria™ Cladding

James Hardie Stria™ Cladding fixed horizontally to external side of the timber framing. Refer to both Stria™ Cladding CLD Structural Cavity Batten Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie $^{\text{TM}}$  Mineral insulation.

#### **WWElephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

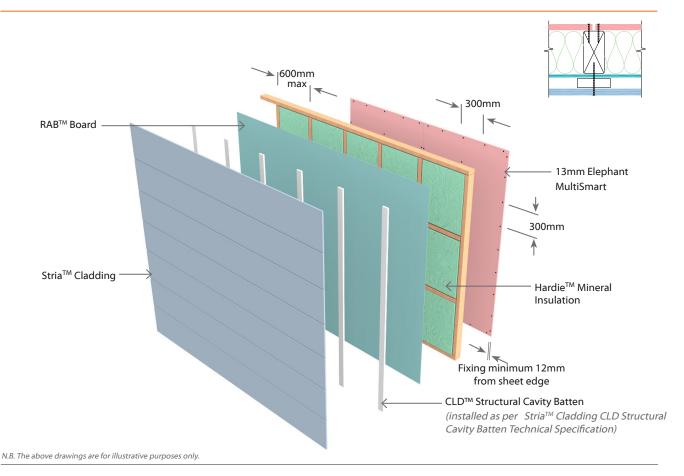



EJF1TL30

EPB & James Hardie Hardie™ Flex Sheet

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJF1TL30	-F10	30/30/30	R2.2 glass wool	42	$1 \times 10$ mm Elephant FireSmart on Internal side James Hardie Hardie $^{TM}$ Flex Sheet to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### **Underlay**

#### Fire Retardant Flexible Underlay

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### **Cavity Batten**

When Cavity Batten is required, use a nominal 20mm Timber Cavity Batten. Refer to James Hardie Hardie™ Flex Sheet Technical Specification.

When Cladding can be directly fixed without a cavity batten then a fire retardant flexible underlay must be used.

# James Hardie Hardie™ Flex Sheet Cladding

James Hardie Hardie™ Flex Sheet cladding to external side of the timber framing. Consider the nail length required depending on the type of fixing i.e. Cavity fixing or Direct fixing. Refer to both James Hardie Hardie™ Flex Sheet Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

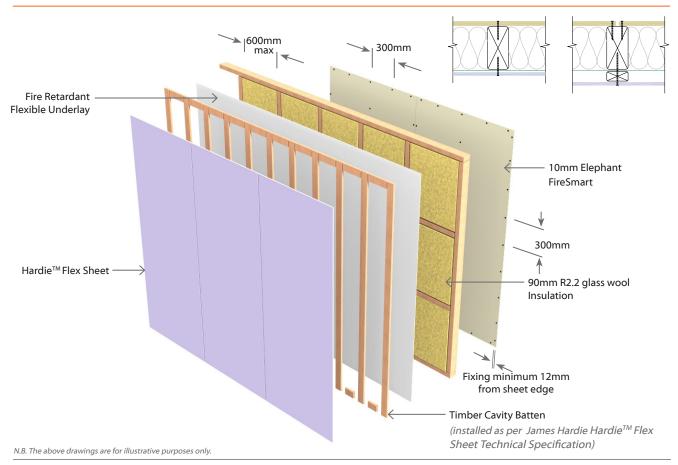



EJF1TL60

EPB & James Hardie Hardie™ Flex Sheet

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJF1TL60	-M13	60/60/60	Hardie™ Mineral	43	1 x 13mm Elephant MultiSmart on Internal side James Hardie Hardie™Flex Sheet to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### Underlay

#### **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### Cavity Batten

When Cavity Batten is required, use a nominal 20mm Timber Cavity Batten. Refer to James Hardie Hardie  $^{\text{TM}}$  Flex Sheet Technical

When Cladding can be directly fixed without a cavity batten then a fire retardant flexible underlay must be used.

## James Hardie Hardie™ Flex Sheet Cladding

James Hardie Hardie™ Flex Sheet cladding to external side of the timber framing. Consider the nail length required depending on the type of fixing i.e. Cavity fixing or Direct fixing. Refer to both James Hardie Hardie™ Flex Sheet Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie™ Mineral insulation.

## **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

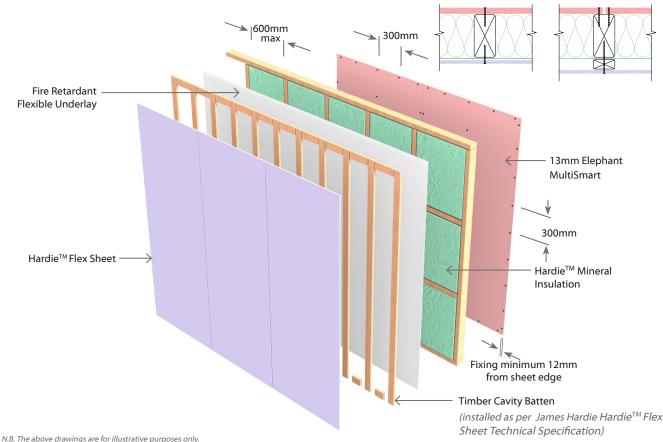





EJA1TL30

EPB & James Hardie Axon™ Panel

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJA1TL30	-F10	30/30/30	R2.2 glass wool	41	1 x 10mm Elephant FireSmart on Internal side James Hardie Axon™ Panel to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### Underlay

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

#### Fire Retardant Flexible Underlay

& RAB™ Board Installation Manual.

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 200mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 200mm centres

Fixing to be 12mm from sheet edges Reference to be made to the James Hardie Home RAB<sup>TM</sup> Pre-Cladding

When Cavity Batten is required, use a nominal 20mm Timber Cavity Batten. Refer to Axon™ Panel Timber Cavity Batten Technical Specification. When Cladding is allowed to be directly fixed without Refer to Axon™ Panel Direct Fixed Technical Specification.

# James Hardie Axon™ Panel Cladding

James Hardie Axon™ Panel cladding to external side of the timber framing. Consider the nail length required depending on the type of fixing i.e. Cavity fixing or Direct fixing. Refer to both Axon™ Panel Timber Cavity Batten Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid  $timber\ framing.\ Sheets\ shall\ be\ touch\ fitted.$ 

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws

#### **Fastener Centres**

When using RAB™


Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

## Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

When using Fire Retardant Flexible Underlay

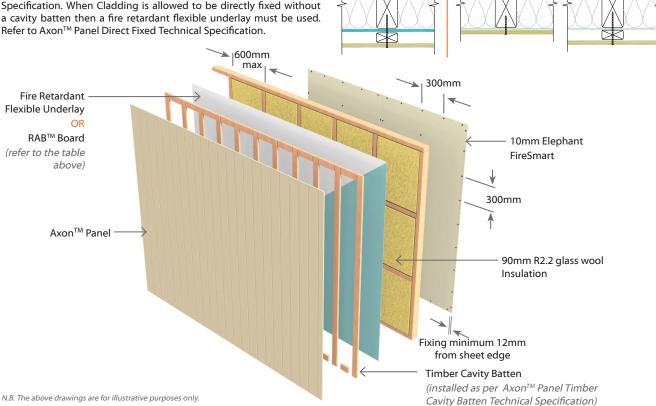

EJA1TL60

EPB & James Hardie Axon™ Panel

Two Way FRR

#### External Wall - Timber Frame

#### **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJA1TL60	-M13	60/60/60	Hardie™ Mineral	42	1 x 13mm Elephant MultiSmart on Internal side James Hardie Axon™ Panel to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### **Underlay**

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

#### **Fire Retardant Flexible Underlay**

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use  $40 \times 2.8$ mm fibre cement nail at 200mm centres 9mm RAB<sup>TM</sup> Board: Use  $50 \times 2.8$ mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\!\top\!\!M}$  Pre-Cladding & RAB  $^{\!\top\!\!M}$  Board Installation Manual.

#### **Cavity Batten**

When Cavity Batten is required, use a nominal 20mm Timber Cavity Batten. Refer to Axon™ Panel Timber Cavity Batten Technical Specification. When Cladding is allowed to be directly fixed without a cavity batten then a fire retardant flexible underlay must be used. Refer to Axon™ Panel Direct Fixed Technical Specification.

## James Hardie Axon™ Panel Cladding

James Hardie Axon™ Panel cladding to external side of the timber framing. Consider the nail length required depending on the type of fixing i.e. Cavity fixing or Direct fixing. Refer to both Axon™ Panel Timber Cavity Batten Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie  $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# Fixing of Elephant Plasterboard Internal Linings Fasteners

41mm x 6g High Thread Drywall Screws

#### **Fastener Centres**

When using RAB<sup>1</sup>


Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

When using Fire Retardant Flexible Underlay

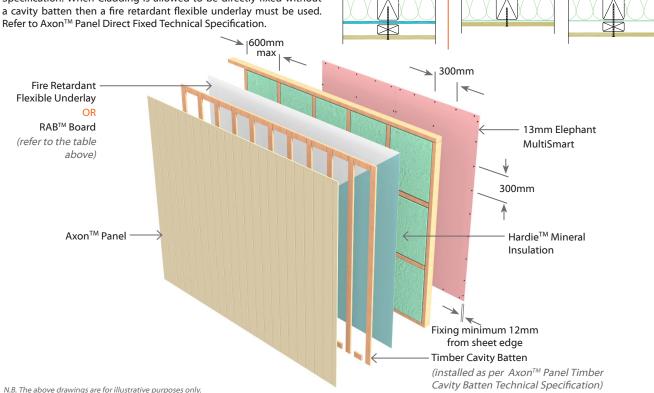



EJRA1TL30

EPB & James Hardie Axon™ Panel & RAB™ Board on CLD™ Battens

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRA1TL30	-F10	30/30/30	R2.2 glass wool	45	1 x 10mm Elephant FireSmart on Internal side  James Hardie Axon™ Panel and RAB™ Board  with CLD™ Structural Cavity Batten to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability, Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### Underlay

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 150mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB $^{\text{TM}}$  Board Installation Manual.

#### Cavity Batten

Use 70 x 19mm CLD™ Structural Cavity Batten. Refer to Axon™ Panel CLD Structural Cavity Batten Technical Specification.

# James Hardie Axon™ Panel Cladding

James Hardie Axon™ Panel cladding to external side of the timber framing. Refer to both Axon™ Panel CLD Structural Cavity Batten Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

## **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

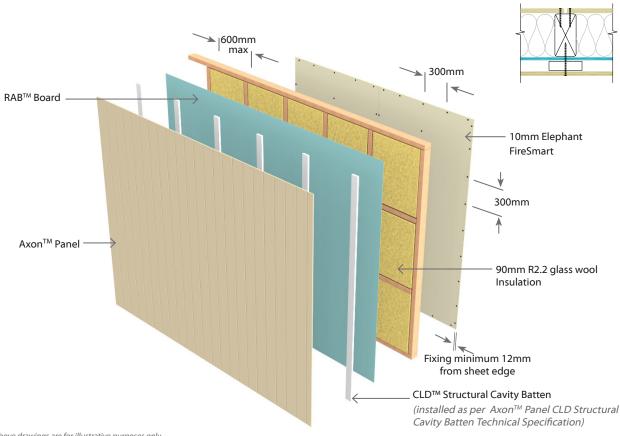

N.B. The above drawings are for illustrative purposes only



EJRA1TL60

EPB & James Hardie Axon™ Panel & RAB™ Board on CLD™ Battens

Two Way FRR

#### External Wall - Timber Frame

## **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRA1TL60	-M13	60/60/60	Hardie™ Mineral	46	1 x 13mm Elephant MultiSmart on Internal side  James Hardie Axon™ Panel and RAB™ Board  with CLD™ Structural Cavity Batten to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### **Underlay**

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 150mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

#### **Cavity Batten**

Use 70 x 19mm CLD™ Structural Cavity Batten. Refer to Axon™ Panel CLD Structural Cavity Batten Technical Specification.

## James Hardie Axon™ Panel Cladding

James Hardie Axon™ Panel cladding to external side of the timber framing. Refer to both Axon™ Panel CLD Structural Cavity Batten Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie™ Mineral insulation.

#### **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid  $timber\ framing.\ Sheets\ shall\ be\ touch\ fitted.$ 

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**


Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

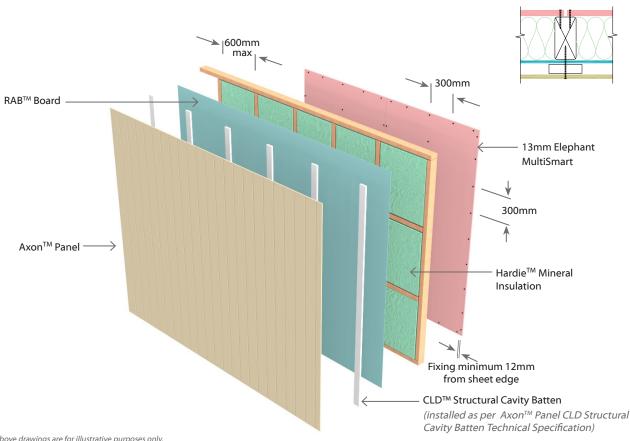





EJE1TL30

EPB & James Hardie EasyLap™ Panel

Two Way FRR

## External Wall - Timber Frame

**Load Bearing** 

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJE1TL30	-F10	30/30/30	R2.2 glass wool	42	1 x 10mm Elephant FireSmart on Internal side James Hardie EasyLap™ Panel to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

## **Underlay**

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

#### Fire Retardant Flexible Underlay

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 200mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

#### **Cavity Batten**

Use a nominal 20mm Timber Cavity Batten. Refer to Axon™ Panel & EasyLap™ Panel Timber Cavity Batten Technical Specification for installation instructions.

# James Hardie EasyLap™ Panel Cladding

James Hardie EasyLap™ Panel cladding to external side of the timber framing. Refer to both Axon™ Panel & EasyLap™ Panel Timber Cavity Batten Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

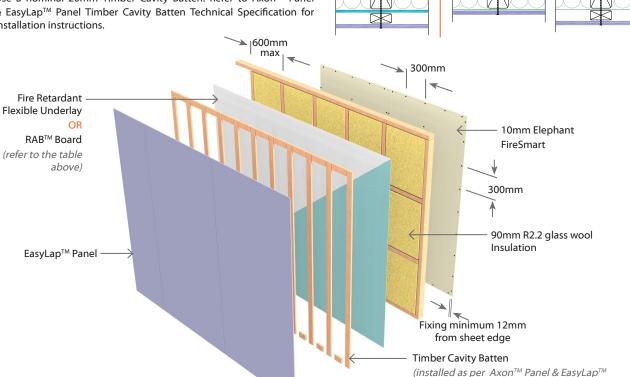



N.B. The above drawings are for illustrative purposes only

PanelTimber Cavity Batten Technical Specification)

EJE1TL60

EPB & James Hardie EasyLap™ Panel

Two Wav FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJE1TL60	-M13	60/60/60	Hardie™ Mineral	43	1 x 13mm Elephant MultiSmart on Internal side James Hardie EasyLap™ Panel to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

## **Underlay**

For the type of allowable underlay refer to table below.

	EH Wind Zone	Other Wind Zone
Buildings < 10m	RAB	Flexible Underlay
Buildings >10m	RAB	RAB

#### Fire Retardant Flexible Underlay

Install any Fire Retardant Flexible Underlay beneath the claddings, that complies with Table 23 of E2/AS1 and has a flammability index not exceeding 5.

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing. 6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 200mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 200mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

#### **Cavity Batten**

Use a nominal 20mm Timber Cavity Batten. Refer to Axon™ Panel & EasyLap™ Panel Timber Cavity Batten Technical Specification for installation instructions.

# James Hardie EasyLap™ Panel Cladding

James Hardie EasyLap™ Panel cladding to external side of the timber framing. Refer to both Axon™ Panel & EasyLap™ Panel Timber Cavity Batten Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie™ Mineral insulation.

#### **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

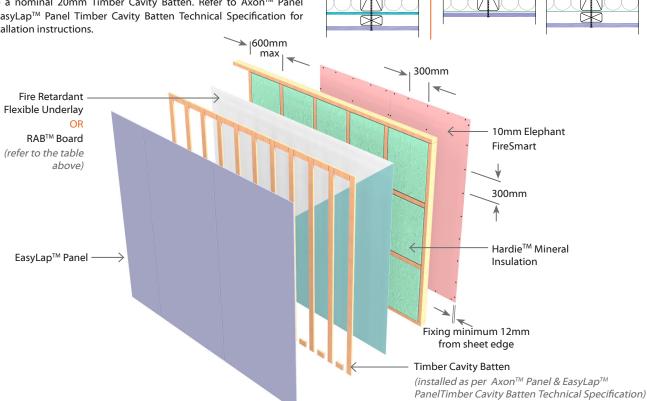



Version update: February 2023

N.B. The above drawings are for illustrative purposes only

EJRE1TL30

EPB & James Hardie EasyLap™ Panel & RAB™ Board with CLD™ Battens

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRE1TL30	-F10	30/30/30	R2.2 glass wool	46	1 x 10mm Elephant FireSmart on Internal side  James Hardie EasyLap™ Panel and RAB™ Board  with CLD™ Structural Cavity Batten to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

# **Underlay**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use 40 x 2.8mm fibre cement nail at 150mm centres 9mm RAB<sup>TM</sup> Board: Use 50 x 2.8mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

#### **Cavity Batten**

Use 70 x 19mm CLD  $^{TM}$  Structural Cavity Batten. Refer to EasyLap  $^{TM}$  Panel Technical Specification

## James Hardie EasyLap™ Panel Cladding

James Hardie EasyLap<sup>TM</sup> Panel cladding to external side of the timber framing. Refer to both EasyLap<sup>TM</sup> Panel Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

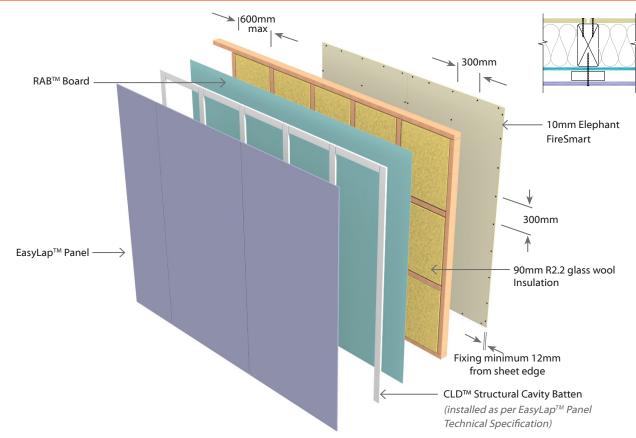

N.B. The above drawings are for illustrative purposes only



EJRE1TL60

EPB & James Hardie EasyLap™ Panel & RAB™ Board with CLD™ Battens

Two Way FRR

#### External Wall - Timber Frame

## **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRE1TL60	-M13	60/60/60	Hardie™ Mineral	47	1 x 13mm Elephant MultiSmart on Internal side  James Hardie EasyLap™ Panel and RAB™ Board  with CLD™ Structural Cavity Batten to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### Underlay

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use 40 x 2.8mm fibre cement nail at 150mm centres 9mm RAB<sup>TM</sup> Board: Use 50 x 2.8mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\text{TM}}$  Pre-Cladding & RAB  $^{\text{TM}}$  Board Installation Manual.

#### **Cavity Batten**

Use 70 x 19mm CLD $^{TM}$  Structural Cavity Batten. Refer to EasyLap $^{TM}$  Panel Technical Specification

## James Hardie EasyLap™ Panel Cladding

James Hardie EasyLap™ Panel cladding to external side of the timber framing. Refer to both EasyLap™ Panel Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### Wall Insulation

Insulation must be installed between studs and nogs. Use Hardie $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# Fixing of Elephant Plasterboard Internal Linings

#### Fasteners

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

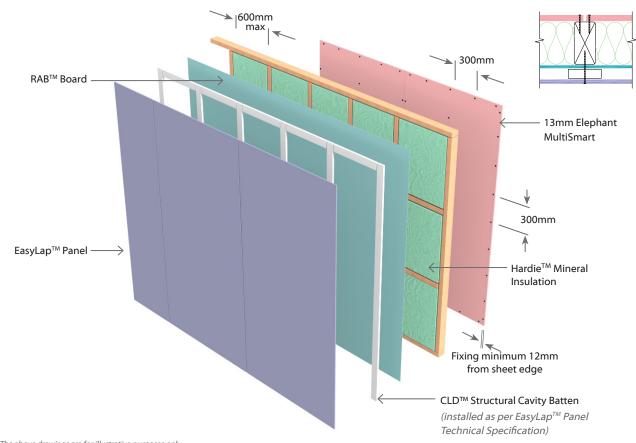

N.B. The above drawings are for illustrative purposes only.



EJRX1TL30

EPB & JH ExoTec<sup>™</sup> Facade Panel & RAB<sup>™</sup> Board with Top Hat System

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRX1TL30	-F10	30/30/30	R2.2 glass wool	47	1 x 10mm Elephant FireSmart on Internal side  James Hardie ExoTec™ Facade Panel and RAB™ Board  with Top hat system to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

# **Underlay**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use  $40 \times 2.8$ mm fibre cement nail at 150mm centres 9mm RAB<sup>TM</sup> Board: Use  $50 \times 2.8$ mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB™ Pre-Cladding & RAB™ Board Installation Manual.

#### **Cavity Batten**

Use ExoTec<sup>™</sup> Top hat system. Refer to ExoTec<sup>™</sup> Facade Panel Top Hat Rainscreen Technical Specification

# James Hardie ExoTec<sup>™</sup> Facade Panel Cladding

James Hardie ExoTec<sup>™</sup> Facade Panel cladding to external side of the timber framing. Refer to both ExoTec<sup>™</sup> Facade Panel Top Hat Rainscreen Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

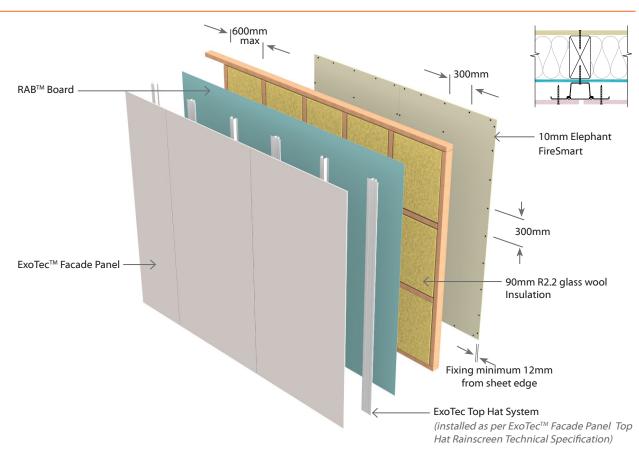

N.B. The above drawings are for illustrative purposes only



EJRX1TL60

EPB & JH ExoTec<sup>™</sup> Facade Panel & RAB<sup>™</sup> Board with Top Hat System

Two Way FRR

#### External Wall - Timber Frame

## **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRX1TL60	-M13	60/60/60	Hardie™ Mineral	48	1 x 13mm Elephant MultiSmart on Internal side  James Hardie ExoTec™ Facade Panel and RAB™ Board  with Top hat system to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

#### **Underlay**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing.  $6mm\,RAB^{TM}$  Board: Use  $40\times2.8mm$  fibre cement nail at 150mm centres  $9mm\,RAB^{TM}$  Board: Use  $50\times2.8mm$  fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\text{TM}}$  Pre-Cladding & RAB  $^{\text{TM}}$  Board Installation Manual.

#### **Cavity Batten**

Use ExoTec<sup>™</sup> Top hat system. Refer to ExoTec<sup>™</sup> Facade Panel Top Hat Rainscreen Technical Specification

## James Hardie ExoTec™ Facade Panel Cladding

James Hardie ExoTec™ Facade Panel cladding to external side of the timber framing. Refer to both ExoTec™ Facade Panel Top Hat Rainscreen Technical Specification AND the James Hardie Fire & Acoustic Design Manual for information regarding fixing and finishing.

#### Wall Insulation

Insulation must be installed between studs and nogs. Use Hardie  $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

#### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

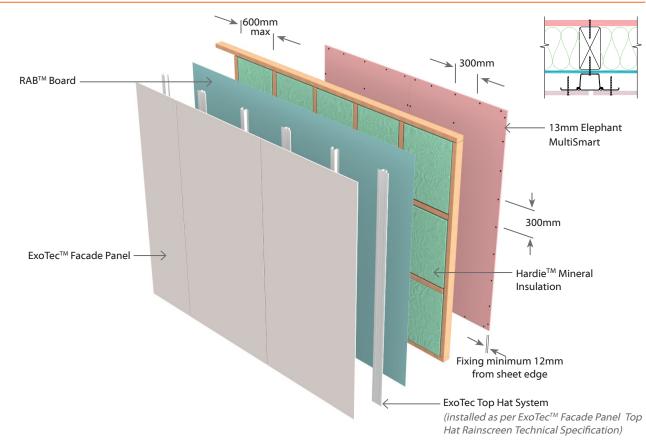

N.B. The above drawings are for illustrative purposes only.



EJRN1TL30

EPB & James Hardie RAB™ Board & a Weathertight Cladding

Two Way FRR

#### External Wall - Timber Frame

**Load Bearing** 

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRN1TL30	-F10	30/30/30	R2.2 glass wool	42	1 x 10mm Elephant FireSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side

## Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further instructions.

## **Underlay**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use  $40 \times 2.8$ mm fibre cement nail at 150mm centres 9mm RAB<sup>TM</sup> Board: Use  $50 \times 2.8$ mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\text{TM}}$  Pre-Cladding & RAB  $^{\text{TM}}$  Board Installation Manual.

#### Cavity Batten

Cavity battens as per cladding manufacturer's technical specification.

# Weathertight Cladding

The Exterior wall must be clad with a suitable weathertight material. Cladding fixed as per manufacturer's technical specification.

N.B: It is important to consider the fire properties of the external cladding is in accordance with NZBC C/VM1 or C/AS documents.

Refer to Table 5.1 of Section 5.4 of C/AS1 and Table 5.5 of Section 5.8.1 of C/AS2 for the information about various risk groups to identify the external fire spread safety requirement applicable to the exterior surface finishes.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

#### **Elephant Plasterboard Lining**

One layer of 10mm Elephant FireSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

## Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

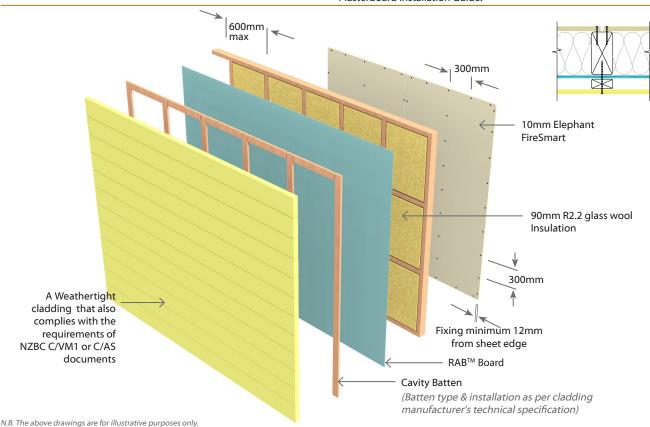



EJRN1TL60

EPB & James Hardie RAB™ Board & a Weathertight Cladding

Two Way FRR

#### External Wall - Timber Frame

## **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRN1TL60	-M13	60/60/60	Hardie™ Mineral	42	$1\times 13$ mm Elephant MultiSmart on Internal side James Hardie RAB $^{\text{TM}}$ Board with a Weathertight Cladding to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further instructions.

## **Underlay**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use  $40 \times 2.8$ mm fibre cement nail at 150mm centres 9mm RAB<sup>TM</sup> Board: Use  $50 \times 2.8$ mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\text{TM}}$  Pre-Cladding & RAB  $^{\text{TM}}$  Board Installation Manual.

#### **Cavity Batten**

Cavity battens as per cladding manufacturer's technical specification.

## **Weathertight Cladding**

The Exterior wall must be clad with a suitable weathertight material. Cladding fixed as per manufacturer's technical specification.

N.B: It is important to consider the fire properties of the external cladding is in accordance with NZBC C/VM1 or C/AS documents.

Refer to Table 5.1 of Section 5.4 of C/AS1 and Table 5.5 of Section 5.8.1 of C/AS2 for the information about various risk groups to identify the external fire spread safety requirement applicable to the exterior surface finishes.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie  $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

One layer of 13mm Elephant MultiSmart lining to internal side of framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

41mm x 6g High Thread Drywall Screws


#### **Fastener Centres**

Fix at 300mm centres around sheet perimeter and up all intermediate studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

## Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

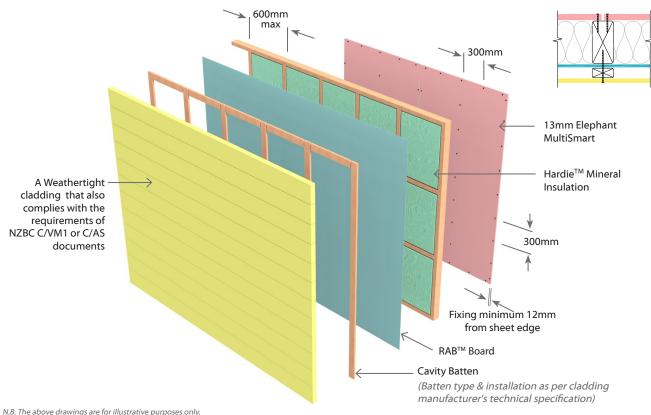





EJRN2TL60

EPB & James Hardie RAB™ Board & a Weathertight Cladding

Two Way FRR

#### External Wall - Timber Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
	-F20	60/60/60	Hardie™ Mineral	46	2 x 10mm Elephant FireSmart on Internal side  James Hardie RAB™ Board with a Weathertight Cladding to External side
EJRN2TL60	-S26	60/60/60	Hardie™ Mineral	47	2 x 13mm Elephant Standard on Internal side  James Hardie RAB™ Board with a Weathertight Cladding to External side
	-M20	60/60/60	Hardie™ Mineral	47	2 x 10mm Elephant MultiSmart on Internal side  James Hardie RAB™ Board with a Weathertight Cladding to External side

#### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further instructions.

#### **Underlay**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use 40 x 2.8mm fibre cement nail at 150mm centres 9mm RAB<sup>TM</sup> Board: Use 50 x 2.8mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\text{TM}}$  Pre-Cladding & RAB  $^{\text{TM}}$  Board Installation Manual.

#### **Cavity Batten**

 $\label{lem:cavity battens} \textbf{Cavity battens as per cladding manufacturer's technical specification.}$ 

## **Weathertight Cladding**

The Exterior wall must be clad with a suitable weathertight material. Cladding fixed as per manufacturer's technical specification.

N.B: It is important to consider the fire properties of the external cladding is in accordance with NZBC C/VM1 or C/AS documents.

Refer to Table 5.1 of Section 5.4 of C/AS1 and Table 5.5 of Section 5.8.1 of C/AS2 for the information about various risk groups to identify

the external fire spread safety requirement applicable to the exterior surface finishes.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie  $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

Two layers of Elephant Plasterboard lining to internal side of framing as per specified system above. First layer or inner layer to be fixed vertically. Vertical or Horizontal fixing permitted on outer layer only. Use full height or full length sheets where possible. All sheet joints must be fixed over solid timber framing. Vertical Joints of the outer layer should be offset 600mm from those of the inner layer. Sheet end butt joints must be formed over nogs. Offset the outer layer joints from the inner layer. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

Inner layer: 41mm x 6g High Thread Drywall Screws Outerlayer: 51mm x 7g High Thread Drywall Screws

#### **Fastener Centres**


Inner Layer: Fix at 600mm centres at sheet perimeter and all studs. Outer Layer: Fix at 300mm centres at sheet perimeter and all studs. Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Avoid outer layer screws from hitting inner layer screws.

## **Jointing and Finishing of Elephant Plasterboard**

Inner Layer: Unstopped.

Outer Layer: All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

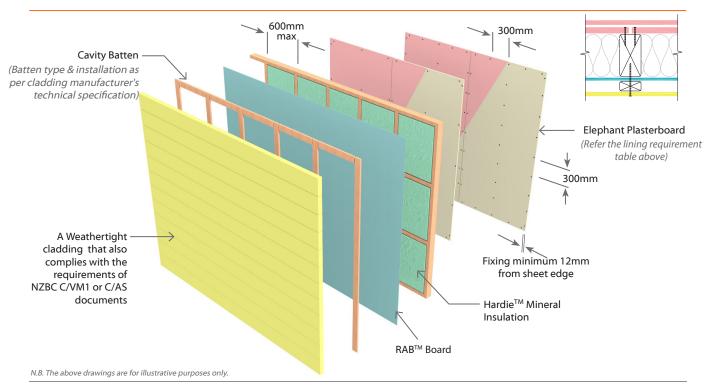

# External Steel Frame Walls

EJRH1SL30

EPB & RAB™ Board with selected James Hardie Fibre Cement Cladding

Two Way FRR

#### External Wall - Steel Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
F1011151 20	-M13	30/30/30	Hardie™ Mineral	42 - 47	1 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with selected James Hardie cladding to External side
EJRH1SL30	-F16	30/30/30	Hardie <sup>™</sup> Mineral	42 - 47	1 x 16mm Elephant FireSmart on Internal side James Hardie RAB™ Board with selected James Hardie Fibre Cement cladding with to External side

#### Framing, Wall Height, Load and Framing Dimension

Steel framing for fire rated walls must be in accordance with NASH standard for residential and low rise buildings and AS/NZ 1170 standards. The framing shall also meet the following;

- Steel sections shall be galvanized/zinc coated and have a base metal thickness (BMT) 0.55mm minimum for non-load bearing walls and 0.75mm minimum for load bearing walls and 1.6mm maximum
- The minimum size for steel stud framing to be used in external walls shall be minimum 89mm deep x 36mm wide
- · Maximum stud spacing 400mm c/c
- Maximum nogs / dwangs spacing 800mm c/c
- · Steel frame must comply with the durability requirements of NZBC
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction as per SED in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

## **Thermal Fire Batten**

Fire battens are used on all FRR steel stud systems and must be used between James Hardie Cladding and steel framing face.

Refer to section 4.6 of James Hardie Fire & Acoustic Design Manual for installation detail.

#### **Pre-Cladding / Underlay**

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing.

 $\mathsf{RAB}^{\scriptscriptstyle\mathsf{TM}}$  Board must be used to achieve fire ratings

6mm RAB™ Board: Use  $40 \times 2.8$ mm fibre cement nail at 150mm centres 9mm RAB™ Board: Use  $50 \times 2.8$ mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\text{TM}}$  Pre-Cladding & RAB  $^{\text{TM}}$  Board Installation Manual.

# **Cavity Batten**

Refer to the table below for the type of cavity batten required for the selected James Hardie system.

James Hardie Cladding System	Cavity Batten type
ExoTec™	Top Hat System
EasyLap <sup>TM</sup>	
<b>Stria</b> <sup>™</sup> (Horizontally fixed)	CLD Structural Cavity Batten
Axon™	

#### **CLD™ Structural Cavity Batten:**

Use 70 x 19mm CLD™ Structural Cavity Batten.

CLD<sup>TM</sup> Structural Cavity battens to be installed according to the selected type of James Hardie cladding and as per the relevant technical specification, refer page 29 of this manual.

# **ExoTec<sup>™</sup> Top Hat System:**

For ExoTec<sup>™</sup> Top hat system installation instructions, refer to ExoTec<sup>™</sup> Facade Panel Top Hat Rainscreen Technical Specification

#### **James Hardie Fibre Cement Cladding**

One layer of selected James Hardie Fibre Cement cladding to one side of the framing. See list below for allowable James Hardie claddings.

Selected Cladding System
ExoTec <sup>TM</sup>
EasyLap™
<b>Stria</b> <sup>™</sup> (Horizontally fixed)
Axon <sup>TM</sup>

Refer to page 29 of this manual for the above mentioned James Hardie cladding's relevant technical literature.

Also refer to James Hardie Fire & Acoustic Design Manual.

#### Wall Insulation

Insulation must be installed between studs and nogs. Use Hardie  $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

One layer of Elephant Plasterboard lining as per specified system above to internal side of the steel framing. Vertical fixing only permitted. Use full height sheets where possible. All sheet joints must be fixed over steel framing. Where sheet end butt joints are unavoidable, they must be formed over nogs. The layer is fixed hard to the floor. Sheet shall be touch fitted.

# Fixing of Elephant Plasterboard Internal Linings

# Fasteners (As per Specified System Above)

System Number	Single Layer
	Self-Tapping Drywall Screws
EJRH1SL30-M13	13mm
	32 x 6g
	16mm
	32 x 6g

# **Fastener Centres**

Fix at 300mm centres up each stud with no fixing to top and bottom channel sections.

Place fasteners no closer than 12mm from the sheet edge and 50mm from sheet ends.

Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.



EJRH1SL30


EPB & RAB™ Board with selected James Hardie Fibre Cement Cladding


Two Way FRR

# External Wall - Steel Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
FIDUACI 20	-M13	30/30/30	Hardie™ Mineral	42 - 47	1 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with selected James Hardie cladding to External side
EJRH1SL30	-F16	30/30/30	Hardie™ Mineral	42 - 47	1 x 16mm Elephant FireSmart on Internal side James Hardie RAB™ Board with selected James Hardie Fibre Cement cladding with to External side



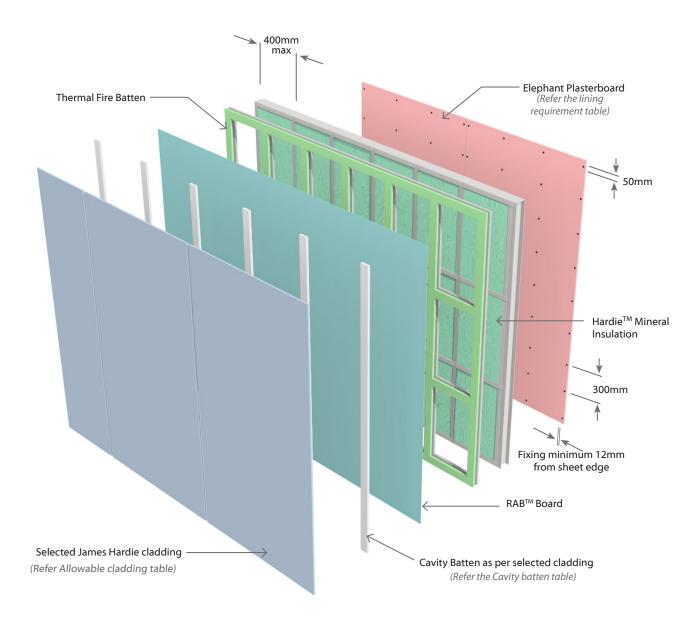

N.B. The above drawings are for illustrative purposes only.



EPB & RAB™ Board with selected James Hardie Fibre Cement Cladding

Two Way FRR

#### External Wall - Steel Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRH2SL30	-F20	30/30/30	Hardie™ Mineral	47 - 53	2 x 10mm Elephant FireSmart on Internal side James Hardie RAB™ Board with selected James Hardie cladding to External side

## Framing, Wall Height, Load and Framing Dimension

Steel framing for fire rated walls must be in accordance with NASH standard for residential and low rise buildings and AS/NZ 1170 standards. The framing shall also meet the following;

- Steel sections shall be galvanized/zinc coated and have a base metal thickness (BMT) 0.55mm minimum for non-load bearing walls and 0.75mm minimum for load bearing walls and 1.6mm maximum
- The minimum size for steel stud framing to be used in external walls shall be minimum 89mm deep x 36mm wide
- Maximum stud spacing 400mm c/c
- Maximum nogs / dwangs spacing 800mm c/c
- Steel frame must comply with the durability requirements of NZBC
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction as per SED in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

## **Thermal Fire Batten**

Fire battens are used on all FRR steel stud systems and must be used between James Hardie Cladding and steel framing face.

Refer to section 4.6 of James Hardie Fire & Acoustic Design Manual for installation detail.

#### **Pre-Cladding / Underlay**

#### RAB™ Board

One layer of James Hardie RAB™ Board fixed to entire framing.

RAB™ Board must be used to achieve fire ratings

6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 150mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home  $\mathsf{RAB}^\mathsf{TM}$   $\mathsf{Pre-Cladding}$ & RAB™ Board Installation Manual.

## **Cavity Batten**

Refer to the table below for the type of cavity batten required for the selected James Hardie system.

James Hardie Cladding System	Cavity Batten type
ExoTec <sup>TM</sup>	Top Hat System
EasyLap <sup>™</sup>	
<b>Stria</b> <sup>™</sup> (Horizontally fixed)	CLD Structural Cavity Batten
Axon <sup>TM</sup>	

#### **CLD™ Structural Cavity Batten:**

Use 70 x 19mm CLD $^{\text{TM}}$  Structural Cavity Batten.

CLD™ Structural Cavity battens to be installed according to the selected type of James Hardie cladding and as per the relevant technical specification, refer page 29 of this manual.

#### **ExoTec™ Top Hat System:**

For ExoTec<sup>™</sup> Top hat system installation instructions, refer to ExoTec<sup>™</sup> Facade Panel Top Hat Rainscreen Technical Specification

# **James Hardie Fibre Cement Cladding**

One layer of selected James Hardie Fibre Cement cladding to one side of the framing. See list below for allowable James Hardie claddings.

Selected Cladding Type				
ExoTec <sup>TM</sup>				
EasyLap™				
Stria™ (Horizontally fixed)				
Axon™				

Refer to page 29 of this manual for the above mentioned James Hardie cladding's relevant technical literature.

Also refer to James Hardie Fire & Acoustic Design Manual.

#### Wall Insulation

Insulation must be installed between studs and nogs. Use Hardie™ Mineral insulation.

#### **Elephant Plasterboard Lining**

Two layers of Elephant Plasterboard lining as per specified system above to internal side of the steel framing.

Vertical fixing only permitted. Use full height sheets where possible. All vertical sheet joints must be fixed over framing. Vertical joints of the outer layer should be offset to those of the inner layer. Where sheet end butt joints are unavoidable, the inner layer joints must be formed over nogs. Stagger the outer layer butt joints from the inner layer by minimum 100mm. The layers are fixed hard to the floor. Sheets shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

	1 <sup>st</sup> Layer	2 <sup>nd</sup> Layer		
System Number	Self-Tapping Drywall Screws			
EJRH2SL30-F20	10mm	10mm		
	25 x 6g	32 x 6g		

#### **Fastener Centres**

Inner Layer: Fix at 600mm centres up each stud with no fixing to top and bottom track sections.

Outer Layer: Fix at 300mm centres up each stud with no fixing to top and bottom track sections.

Place fasteners no closer than 12mm to the sheet edge and 50mm from sheet ends.

Place fasteners at 200mm centres where sheet end butt joints occur. Avoid outer layer screws from hitting inner layer screws.

#### Jointing and Finishing of Elephant Plasterboard

Inner Layer: Unstopped

Outer Layer: All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.




EPB & RAB™ Board with selected James Hardie Fibre Cement Cladding


Two Way FRR

# External Wall - Steel Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRH2SL30	-F20	30/30/30	Hardie™ Mineral	47 - 53	$2\times 10\text{mm}$ Elephant FireSmart on Internal side James Hardie RAB $^{\text{TM}}$ Board with selected James Hardie cladding to External side



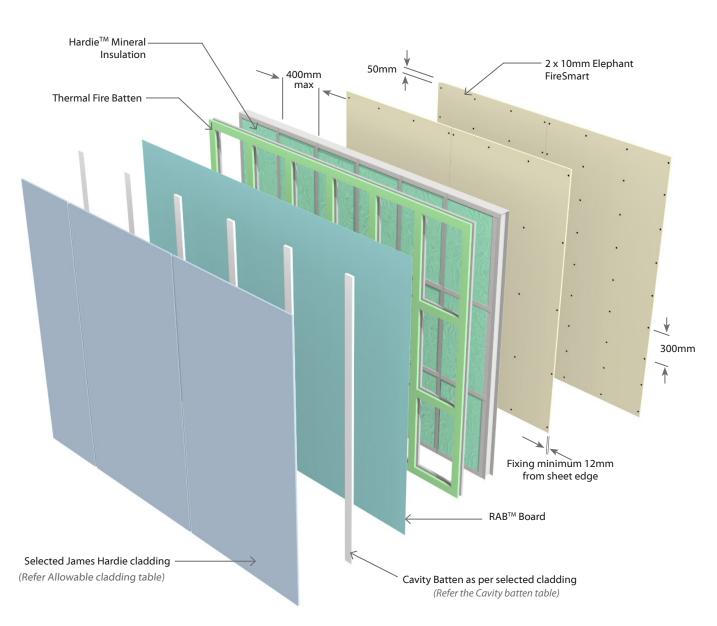

N.B. The above drawings are for illustrative purposes only.



EPB & RAB™ Board with selected James Hardie Fibre Cement Cladding

Two Way FRR

#### External Wall - Steel Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRH2SL60	-M26	60/60/60	Hardie™ Mineral	51- 54	2 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with selected James Hardie cladding to External side

# Framing, Wall Height, Load and Framing Dimension

Steel framing for fire rated walls must be in accordance with NASH standard for residential and low rise buildings and AS/NZ 1170 standards. The framing shall also meet the following;

- Steel sections shall be galvanized/zinc coated and have a base metal thickness (BMT) 0.55mm minimum for non-load bearing walls and 0.75mm minimum for load bearing walls and 1.6mm maximum
- The minimum size for steel stud framing to be used in external walls shall be minimum 89mm deep x 36mm wide
- Maximum stud spacing 400mm c/c
- Maximum nogs / dwangs spacing 800mm c/c
- Steel frame must comply with the durability requirements of NZBC
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction as per SED in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

## **Thermal Fire Batten**

Fire battens are used on all FRR steel stud systems and must be used between James Hardie Cladding and steel framing face.

Refer to section 4.6 of James Hardie Fire & Acoustic Design Manual for installation detail.

#### **Pre-Cladding / Underlay**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing.

RAB™ Board must be used to achieve fire ratings

6mm RAB™ Board: Use 40 x 2.8mm fibre cement nail at 150mm centres 9mm RAB™ Board: Use 50 x 2.8mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\text{TM}}$  Pre-Cladding & RAB  $^{\text{TM}}$  Board Installation Manual.

## **Cavity Batten**

Refer to the table below for the type of cavity batten required for the selected James Hardie system.

James Hardie Cladding System	Cavity Batten type
ExoTec <sup>TM</sup>	Top Hat System
EasyLap <sup>™</sup>	
<b>Stria</b> <sup>™</sup> (Horizontally fixed)	CLD Structural Cavity Batten
Axon <sup>TM</sup>	

## **CLD™ Structural Cavity Batten:**

Use 70 x 19mm CLD $^{\text{TM}}$  Structural Cavity Batten.

CLD<sup>TM</sup> Structural Cavity battens to be installed according to the selected type of James Hardie cladding and as per the relevant technical specification, refer page 29 of this manual.

# ExoTec™ Top Hat System:

For ExoTec<sup>TM</sup> Top hat system installation instructions, refer to ExoTec<sup>TM</sup> Facade Panel Top Hat Rainscreen Technical Specification

#### **James Hardie Fibre Cement Cladding**

One layer of selected James Hardie Fibre Cement cladding to one side of the framing. See list below for allowable James Hardie claddings.

Selected Cladding Type				
ExoTec <sup>TM</sup>				
EasyLap™				
Stria™ (Horizontally fixed)				
Axon™				

Refer to page 29 of this manual for the above mentioned James Hardie cladding's relevant technical literature.

Also refer to James Hardie Fire & Acoustic Design Manual.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie  $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

Two layers of Elephant Plasterboard lining as per specified system above to internal side of the steel framing.

Vertical fixing only permitted. Use full height sheets where possible. All vertical sheet joints must be fixed over framing. Vertical joints of the outer layer should be offset to those of the inner layer. Where sheet end butt joints are unavoidable, the inner layer joints must be formed over nogs. Stagger the outer layer butt joints from the inner layer by minimum 100mm. The layers are fixed hard to the floor. Sheet shall be touch fitted.

# **Fixing of Elephant Plasterboard Internal Linings**

#### **Fasteners**

	1 <sup>st</sup> Layer	2 <sup>nd</sup> Layer		
System Number	Self-Tapping D	Prywall Screws		
EJRH2SL60-M26	13mm	13mm		
	25 x 6q	41 x 6q		

#### **Fastener Centres**

Inner Layer: Fix at 600mm centres up each stud with no fixing to top and bottom track sections.

Outer Layer: Fix at 300mm centres up each stud with no fixing to top and bottom track sections.

Place fasteners no closer than 12mm to the sheet edge and 50mm from sheet ends.

Place fasteners at 200mm centres where sheet end butt joints occur. Avoid outer layer screws from hitting inner layer screws.

## Jointing and Finishing of Elephant Plasterboard

Inner Layer: Unstopped

Outer Layer: All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.




EPB & RAB™ Board with selected James Hardie Fibre Cement Cladding


Two Way FRR

# External Wall - Steel Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRH2SL60	-M26	60/60/60	Hardie™ Mineral	51- 54	$2\times13mm$ Elephant MultiSmart on Internal side James Hardie RAB $^{\text{TM}}$ Board with selected James Hardie cladding to External side



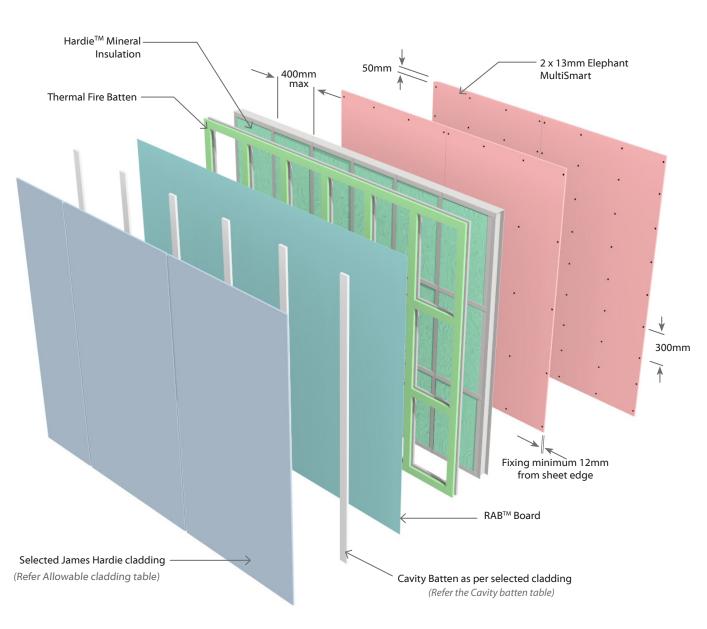

 ${\it N.B.}\ The\ above\ drawings\ are\ for\ illustrative\ purposes\ only.$ 



EJRN1SL30

EPB & James Hardie RAB™ Board & a Weathertight Cladding

Two Way FRR

#### External Wall - Steel Frame

**Load Bearing** 

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRN1SL30	-M13	30/30/30	Hardie™ Mineral	42	1 x 13mm Elephant MultiSmart on Internal side James Hardie RAB <sup>TM</sup> Board with a Weathertight Cladding to External side
	-F16	30/30/30	Hardie™ Mineral	43	1 x 16mm Elephant FireSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side

#### Framing, Wall Height, Load and Framing Dimension

Steel framing for fire rated walls must be in accordance with NASH standard for residential and low rise buildings and AS/NZ 1170 standards. The framing shall also meet the following;

- Steel sections shall be galvanized/zinc coated and have a base metal thickness (BMT) 0.55mm minimum for non-load bearing walls and 0.75mm minimum for load bearing walls and 1.6mm maximum
- The minimum size for steel stud framing to be used in external walls shall be minimum 89mm deep x 36mm wide
- · Maximum stud spacing 400mm centres
- Maximum nogs / dwangs spacing 800mm centres
- · Steel frame must comply with the durability requirements of NZBC
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction as per SED in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

#### **Thermal Fire Batten**

Fire battens are used on all FRR steel stud systems and must be used between James Hardie Cladding and steel framing face.

Refer to section 4.6 of James Hardie Fire & Acoustic Design Manual for installation detail.

## **Pre-Cladding**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use  $40 \times 2.8$ mm fibre cement nail at 150mm centres 9mm RAB<sup>TM</sup> Board: Use  $50 \times 2.8$ mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home  $RAB^{TM}$  Pre-Cladding &  $RAB^{TM}$  Board Installation Manual.

#### **Cavity Batten**

Cavity battens to be installed according to the selected type of Cladding and its manufacturer's relevant technical specification.

# Weathertight Cladding

The Exterior wall must be clad with a suitable weathertight material. Cladding fixed as per manufacturer's technical specification.

 $\hbox{N.B:} \;\;$  It is important to consider the fire properties of the external cladding is in accordance with NZBC C/VM1 or C/AS documents.

Refer to Table 5.1 of Section 5.4 of C/AS1 and Table 5.5 of Section 5.8.1 of C/AS2 for the information about various risk groups to identify the external fire spread safety requirement applicable to the exterior surface finishes.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie  $^{\text{TM}}$  Mineral insulation.

## **Elephant Plasterboard Lining**

One layer of Elephant Plasterboard lining as per specified system above to internal side of the steel framing. Vertical fixing only permitted. Use full height sheets where possible. All sheet joints must be fixed over steel framing. Where sheet end butt joints are unavoidable, they must be formed over nogs. The layer is fixed hard to the floor. Sheet shall be touch fitted.

# Fixing of Elephant Plasterboard Internal Linings Fasteners (As per Specified System Above)

	Single Layer			
System Number Self-Tapping Drywall Screws				
EJRN1SL30-M13				
32 x 6g				
16mm	_			
<b>EJRN1SL30-F16</b> 32 x 6g				

#### **Fastener Centres**

Fix at 300mm centres up each stud with no fixing to top and bottom channel sections.

Place fasteners no closer than 12mm from the sheet edge and 50mm from sheet ends.

Place fasteners at 200mm centres where sheet end butt joints occur.

#### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.



EJRN1SL30


EPB & James Hardie RAB™ Board & a Weathertight Cladding


Two Way FRR

# External Wall - Steel Frame

# **Load Bearing**

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
FIDNIS 20	-M13	30/30/30	Hardie™ Mineral	42	1 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side
EJRN1SL30	-F16	30/30/30	Hardie™ Mineral	43	1 x 16mm Elephant FireSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side



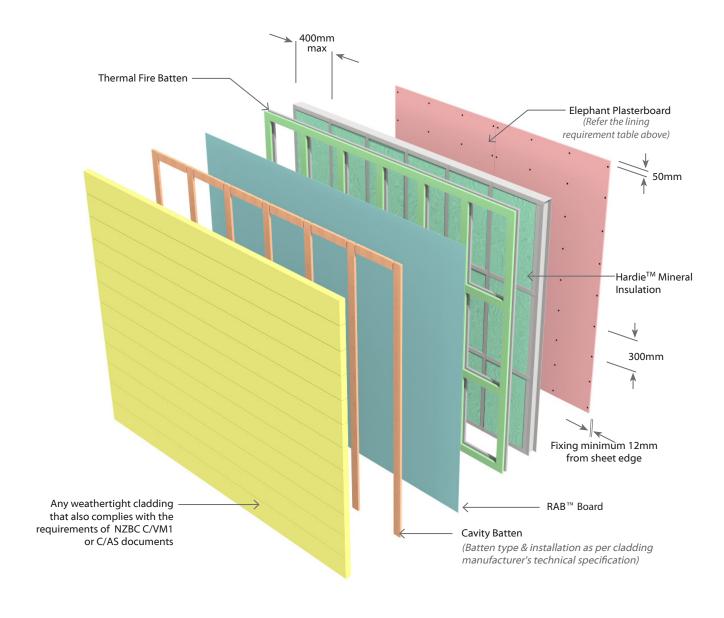

 ${\it N.B.}\ The\ above\ drawings\ are\ for\ illustrative\ purposes\ only.$ 



EJRN2SL30

EPB & James Hardie RAB™ Board & a Weathertight Cladding

Two Way FRR

#### External Wall - Steel Frame

**Load Bearing** 

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRN2SL30	-F20	30/30/30	Hardie™ Mineral	47	2 x 10mm Elephant FireSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side

#### Framing, Wall Height, Load and Framing Dimension

Steel framing for fire rated walls must be in accordance with NASH standard for residential and low rise buildings and AS/NZ 1170 standards. The framing shall also meet the following;

- Steel sections shall be galvanized/zinc coated and have a base metal thickness (BMT) 0.55mm minimum for non-load bearing walls and 0.75mm minimum for load bearing walls and 1.6mm maximum
- The minimum size for steel stud framing to be used in external walls shall be minimum 89mm deep x 36mm wide
- · Maximum stud spacing 400mm centres
- Maximum nogs / dwangs spacing 800mm centres
- · Steel frame must comply with the durability requirements of NZBC
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction as per SED in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

#### **Thermal Fire Batten**

Fire battens are used on all FRR steel stud systems and must be used between James Hardie Cladding and steel framing face.

Refer to section 4.6 of James Hardie Fire & Acoustic Design Manual for installation detail.

#### **Pre-Cladding**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use 40 x 2.8mm fibre cement nail at 150mm centres 9mm RAB<sup>TM</sup> Board: Use 50 x 2.8mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\text{TM}}$  Pre-Cladding & RAB  $^{\text{TM}}$  Board Installation Manual.

#### **Cavity Batten**

Cavity battens to be installed according to the selected type of Cladding and its manufacturer's relevant technical specification.

#### Weathertight Cladding

The Exterior wall must be clad with a suitable weathertight material. Cladding fixed as per manufacturer's technical specification.

N.B: It is important to consider the fire properties of the external cladding is in accordance with NZBC C/VM1 or C/AS documents.

Refer to Table 5.1 of Section 5.4 of C/AS1 and Table 5.5 of Section 5.8.1 of C/AS2 for the information about various risk groups to identify the external fire spread safety requirement applicable to the exterior surface finishes.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

Two layers of Elephant Plasterboard lining as per specified system above to internal side of the steel framing.

Vertical fixing only permitted. Use full height sheets where possible. All vertical sheet joints must be fixed over framing. Vertical joints of the outer layer should be offset to those of the inner layer. Where sheet end butt joints are unavoidable, the inner layer joints must be formed over nogs. Stagger the outer layer butt joints from the inner layer by minimum 100mm. The layers are fixed hard to the floor. Sheets shall be touch fitted.

# Fixing of Elephant Plasterboard Internal Linings Fasteners

	1 <sup>st</sup> Layer	2 <sup>nd</sup> Layer				
System Number	Self-Tapping Drywall Screws					
EIDNISCI SO ESO	10mm	10mm				
EJRN2SL30-F20	25 x 6g	32 x 6g				

#### **Fastener Cenres**

Inner Layer: Fix at 600mm centres up each stud with no fixing to top and bottom track sections.

Outer Layer: Fix at 300mm centres up each stud with no fixing to top and bottom track sections.

Place fasteners at 200mm centres where sheet end butt joints occur. Avoid outer layer screws from hitting inner layer screws.

## **Jointing and Finishing of Elephant Plasterboard**

Inner Layer: Unstopped

Outer Layer: All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.



EJRN2SL30


EPB & James Hardie RAB™ Board & a Weathertight Cladding


Two Way FRR

External Wall - Steel Frame

**Load Bearing** 

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJRN2SL30	-F20	30/30/30	Hardie™ Mineral	47	2 x 10mm Elephant FireSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side



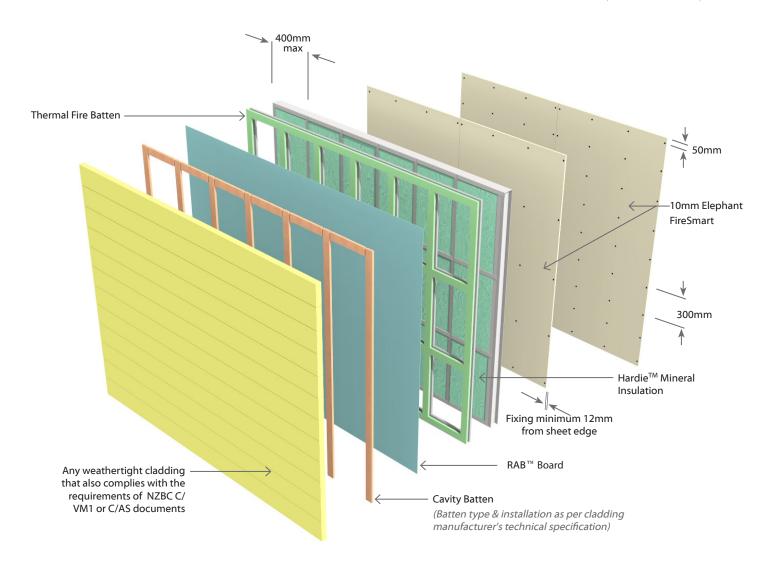

 ${\it N.B.}\ The\ above\ drawings\ are\ for\ illustrative\ purposes\ only.$ 



EJRN2SL60

EPB & James Hardie RAB™ Board & a Weathertight Cladding

Two Way FRR

#### External Wall - Steel Frame

**Load Bearing** 

	System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
	EJRN2SL60	-M26	60/60/60	Hardie™ Mineral	49	2 x 13mm Elephant MultiSmart on Internal side James Hardie RAB™ Board with a Weathertight Cladding to External side

#### Framing, Wall Height, Load and Framing Dimension

Steel framing for fire rated walls must be in accordance with NASH standard for residential and low rise buildings and AS/NZ 1170 standards. The framing shall also meet the following;

- Steel sections shall be galvanized/zinc coated and have a base metal thickness (BMT) 0.55mm minimum for non-load bearing walls and 0.75mm minimum for load bearing walls and 1.6mm maximum
- The minimum size for steel stud framing to be used in external walls shall be minimum 89mm deep x 36mm wide
- · Maximum stud spacing 400mm centres
- Maximum nogs / dwangs spacing 800mm centres
- · Steel frame must comply with the durability requirements of NZBC
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction as per SED in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

#### **Thermal Fire Batten**

Fire battens are used on all FRR steel stud systems and must be used between James Hardie Cladding and steel framing face.

Refer to section 4.6 of James Hardie Fire & Acoustic Design Manual for installation detail.

#### **Pre-Cladding**

#### RAB™ Board

One layer of James Hardie RAB<sup>TM</sup> Board fixed to entire framing. 6mm RAB<sup>TM</sup> Board: Use 40 x 2.8mm fibre cement nail at 150mm centres 9mm RAB<sup>TM</sup> Board: Use 50 x 2.8mm fibre cement nail at 150mm centres Fixing to be 12mm from sheet edges

Reference to be made to the James Hardie Home RAB  $^{\text{TM}}$  Pre-Cladding & RAB  $^{\text{TM}}$  Board Installation Manual.

#### **Cavity Batten**

Cavity battens to be installed according to the selected type of Cladding and its manufacturer's relevant technical specification.

#### Weathertight Cladding

The Exterior wall must be clad with a suitable weathertight material. Cladding fixed as per manufacturer's technical specification.

N.B: It is important to consider the fire properties of the external cladding is in accordance with NZBC C/VM1 or C/AS documents.

Refer to Table 5.1 of Section 5.4 of C/AS1 and Table 5.5 of Section 5.8.1 of C/AS2 for the information about various risk groups to identify the external fire spread safety requirement applicable to the exterior surface finishes.

#### **Wall Insulation**

Insulation must be installed between studs and nogs. Use Hardie $^{\text{TM}}$  Mineral insulation.

#### **Elephant Plasterboard Lining**

Two layers of Elephant Plasterboard lining as per specified system above to internal side of the steel framing.

Vertical fixing only permitted. Use full height sheets where possible. All vertical sheet joints must be fixed over framing. Vertical joints of the outer layer should be offset to those of the inner layer. Where sheet end butt joints are unavoidable, the inner layer joints must be formed over nogs. Stagger the outer layer butt joints from the inner layer by minimum 100mm. The layers are fixed hard to the floor. Sheet shall be touch fitted.

# Fixing of Elephant Plasterboard Internal Linings

#### **Fasteners**

	1 <sup>st</sup> Layer 2 <sup>nd</sup> Layer					
System Number	Self-Tapping Drywall Screws					
FIDNISH CO MAC	13mm	13mm				
EJRN2SL60-M26	25 x 6g	41 x 6g				

#### **Fastener Centres**

Inner Layer: Fix at 600mm centres up each stud with no fixing to top and bottom track sections.

Outer Layer: Fix at 300mm centres up each stud with no fixing to top and bottom track sections.

Place fasteners no closer than 12mm to the sheet edge and 50mm from sheet ends

Place fasteners at 200mm centres where sheet end butt joints occur. Avoid outer layer screws from hitting inner layer screws.

#### Jointing and Finishing of Elephant Plasterboard

Inner Layer: Unstopped

Outer Layer: All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.



### EJRN2SL60


EPB & James Hardie RAB™ Board & a Weathertight Cladding


Two Way FRR

### External Wall - Steel Frame

### **Load Bearing**

System Number	Lining Fire Rating		Insulation Noise Control STC		Lining Requirement	
EJRN2SL60	-M26	60/60/60	Hardie™ Mineral	49	2 x 13mm Elephant MultiSmart on Internal side  James Hardie RAB™ Board with a Weathertight Cladding to External side	



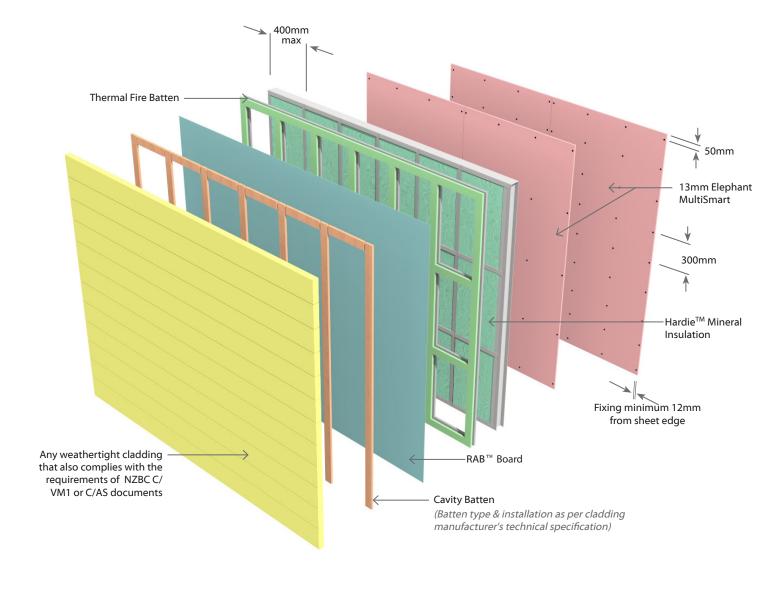

N.B. The above drawings are for illustrative purposes only.



Version update: February 2023

## Internal Timber Frame Walls

EJV1TL30 E

Elephant Plasterboard & James Hardie Villaboard™ Lining

Two Way FRR

### Internal Wall - Timber Frame

**Load Bearing** 

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJV1TL30	-F10	30/30/30	R2.2 glass wool	42	1 x 10mm Elephant FireSmart on One side James Hardie Villaboard™ Lining to Other side

### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

### James Hardie Villaboard™ Lining

Fix James Hardie Villaboard™ Lining to one side of framing. Refer to James Hardie Villaboard™ Lining Installation Manual for information regarding fixing and finishing.

### **Wall Insulation**

Insulation must be installed between studs and nogs. Use 90mm thick R2.2 glass wool insulation.

### **Elephant Plasterboard Lining**

One layer of Elephant Plasterboard lining as per table above to framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

### **Fixing of Elephant Plasterboard Internal Linings**

### Fasteners

41mm x 6g High Thread Drywall screws

### **Fastener Centres**


Fix at 300mm centres at sheet perimeter and up all other studs.

Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

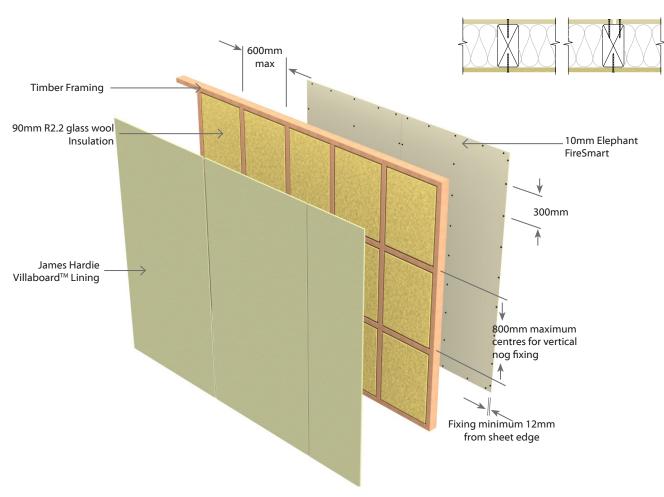

N.B. The above drawings are for illustrative purposes only.



EJV1TL60

Elephant Plasterboard & James Hardie Villaboard™ Lining

Two Way FRR

### Internal Wall - Timber Frame

**Load Bearing** 

System Number	Lining Suffix	Fire Rating	Insulation	Noise Control STC	Lining Requirement
EJV1TL60	-M13	60/60/60	Hardie™ Mineral	43	1 x 13mm Elephant MultiSmart on One side James Hardie Villaboard™ Lining to Other side

### Framing, Wall Height, Load and Framing Dimension

Timber framing to comply with relevant sections and clauses of NZBC B1: Structure and NZBC B2: Durability. Timber framing must be in accordance with NZS3604 stud tables for load bearing or non-load bearing partitions. Furthermore;

- Minimum framing dimension is 90 x 45mm.
- Nogs must be in place at a maximum of 800mm centres.
- · Maximum stud spacing's are 600mm centres.
- The fire rated walls built close to boundary are also required to achieve post fire stability in either direction in accordance with the NZBC verification method B1/VM1, paragraph 2.2.4

Refer to latest James Hardie Fire & Acoustic Design Manual figures and tables for further detail.

### James Hardie Villaboard™ Lining

Fix James Hardie Villaboard™ Lining to one side of framing.
Refer to James Hardie Villaboard™ Lining Installation Manual for information regarding fixing and finishing.

### Wall Insulation

Insulation must be installed between studs and nogs. Use 90mm thick James Hardie Mineral Insulation.

### **Elephant Plasterboard Lining**

One layer of Elephant Plasterboard lining as per table above to framing. Vertical fixing only permitted. Use full height sheets where possible when fixing vertical. All sheet joints must be fixed over solid timber framing. Sheets shall be touch fitted.

### **Fixing of Elephant Plasterboard Internal Linings**

### **Fasteners**

41mm x 6g High Thread Drywall screws

### **Fastener Centres**


Fix at 300mm centres at sheet perimeter and up all other studs.

Place fasteners 50mm from sheet corners along the top and bottom plates. On end studs place additional fasteners 50-60mm vertically and no close than 10mm from plate to stud connections.

Place fasteners no closer than 12mm from the sheet edges and 18mm from sheet ends. Place fasteners at 200mm centres where sheet end butt joints occur.

### **Jointing and Finishing of Elephant Plasterboard**

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

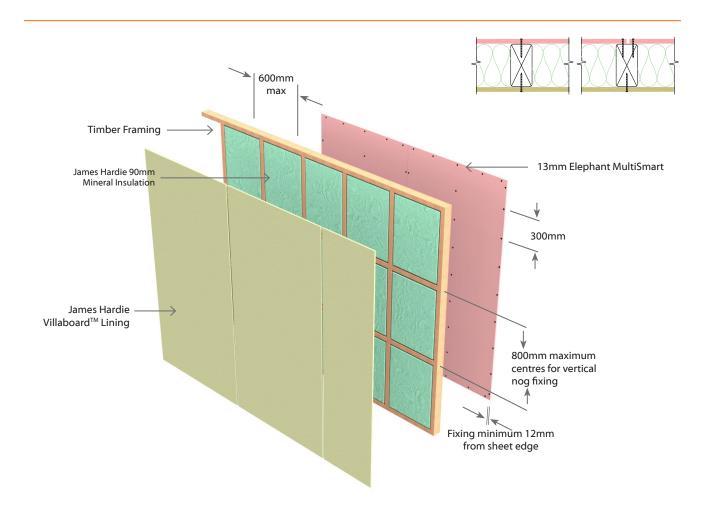

N.B. The above drawings are for illustrative purposes only.



### Floor/Ceiling Systems

### EJS1FC30

### Elephant Plasterboard & James Hardie Secura™ Interior Flooring

### Floor/Ceiling - Timber Joist

### **Load Bearing**

	System Number	Lining Suffix Fire	Fire Rating	Noise Control		Lining Requirement
			riie Rating	STC	IIC	Lining Requirement
	EJS1FC30	-M13	30/30/30	45	33	1 x 13mm Elephant MultiSmart under the frame 19mm James Hardie Secura <sup>™</sup> Interior Flooring above the frame

### **Floor Framing**

Timber floor joists shall comply with NZS3604 with a minimum depth of 190mm x 45mm and spaced at no more than 450mm centres.

Solid strutting at 1800mm maximum centres required.

Nogs fixed on the flat to receive the ends of flooring material shall be  $100 \times 50 \text{mm}$  minimum.

Nogs fixed on the flat to receive the Elephant Plasterboard lining shall be  $75 \text{mm} \times 50 \text{mm}$  minimum.

Nogs or framing is required at the perimeter of the fire rated ceiling. Refer to James Hardie Fire & Acoustic Design Manual.

### Secura<sup>™</sup> Interior Flooring

19mm Secura  $^{\text{TM}}$  Interior Flooring, fixed to the joists at 200mm centres using  $50 \times 2.8mm$  round head nails.

25mm minimum distance from tongue and groove

12mm minimum edge distance

Also refer to James Hardie Secura Interior Flooring Installation Manual.

### **Elephant Plasterboard Lining**

One layer of Elephant Plasterboard as per specified system above fixed at right angles directly to the underside of floor joists.

All joints must occur on joists and solid blocking. Sheets to be touched fitted

### **Fixing of Elephant Plasterboard Internal Linings**

### **Fasteners**

41mm x 6g High Thread Drywall screws


### **Fastener Centres**

Fix at 200mm centres around the sheet perimeter and intermediate ioists.

Place fasteners no closer than 12mm from the sheet edge and 18mm from sheet ends.

### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

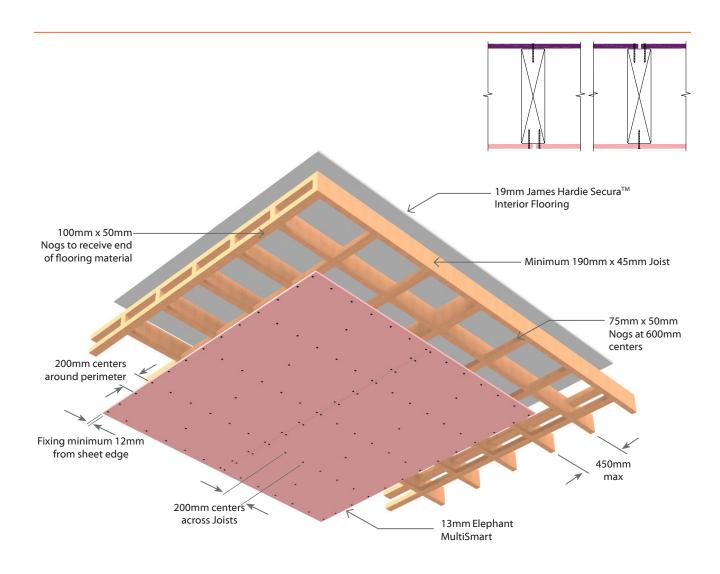

N.B. The above drawings are for illustrative purposes only.



### EJS1FC60

### Elephant Plasterboard & James Hardie Secura<sup>™</sup> Interior Flooring

### Floor/Ceiling - Timber Joist

### **Load Bearing**

	System Number	Lining	Fire Rating	Noise Control		Lining Requirement
System Number	Suffix	rife hatting	STC	IIC IIIIII Requirement	Lining Requirement	
	EJS1FC60	-F16	60/60/60	46	33	1 x 16mm Elephant FireSmart under the frame 19mm James Hardie Secura™ Interior Flooring above the frame

### Floor Framing

Timber floor joists shall comply with NZS3604 with a minimum depth of 190mm x 45mm and spaced at no more than 450mm centres.

Solid strutting at 1800mm maximum centres required.

Nogs fixed on the flat to receive the ends of flooring material shall be  $100 \times 50 \text{mm}$  minimum.

Nogs fixed on the flat to receive the Elephant Plasterboard lining shall be  $75 \text{mm} \times 50 \text{mm}$  minimum.

Nogs or framing is required at the perimeter of the fire rated ceiling. Refer to James Hardie Fire & Acoustic Design Manual.

### Secura<sup>™</sup> Interior Flooring

19mm Secura  $^{\text{TM}}$  Interior Flooring, fixed to the joists at 200mm centres using 50 x 2.8mm round head nails.

25mm minimum distance from tongue and groove

12mm minimum edge distance

Also refer to James Hardie Secura Interior Flooring Installation Manual.

### **Elephant Plasterboard Lining**

One layer of Elephant Plasterboard as per specified system above fixed at right angles directly to the underside of floor joists.

All joints must occur on joists and solid blocking. Sheets to be touched fitted

### **Fixing of Elephant Plasterboard Internal Linings**

### **Fasteners**

51mm x 7g High Thread Drywall screws


### **Fastener Centres**

Fix at 150mm centres around the sheet perimeter and intermediate ioists.

Place fasteners no closer than 12mm from the sheet edge and 18mm from sheet ends.

### Jointing and Finishing of Elephant Plasterboard

All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped. All in accordance with Elephant Plasterboard Installation Guide.

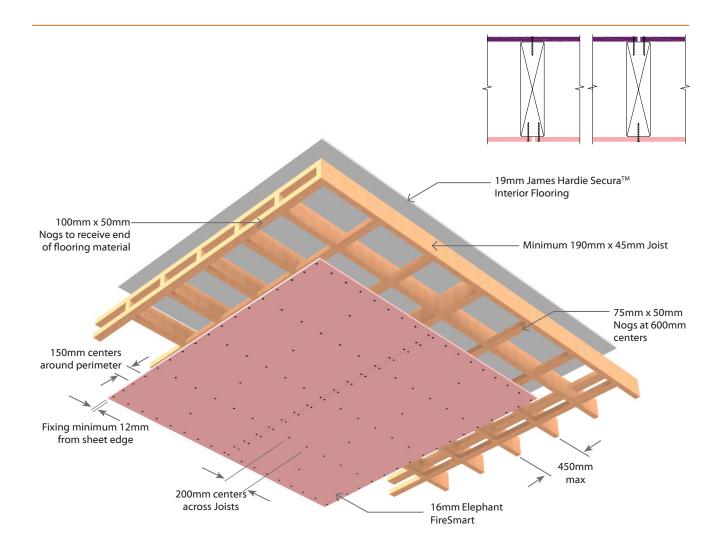

N.B. The above drawings are for illustrative purposes only.



Version update: February 2023

NOTES	



# Floating Floor/Ceiling Systems

EFJ2DFA60

EPB & Floating James Hardie Secura™ Interior Flooring

**Full Intertenancy Accoustic** 

Direct Fix Clip Floating Floor/Ceiling - Timber Joist

**Load Bearing** 

	System Number	Lining Fire Rating		Load Bearing	ivoise Control		Lining Requirement
		Suffix		Ability	STC	IIC*	
	EFJ2DFA60	-MS26	60/60/60	LB	67	57-76	1 x 13mm Elephant MultiSmart AND 1 x 13mm Elephant Standard under the battens
		-M26	60/60/60	LB	68	57-77	2 x 13mm Elephant MultiSmart under the battens

### **Framing**

Timber floor joists shall comply with NZS3604 with a minimum depth of  $190 \, \text{mm} \times 45 \, \text{mm}$  and spaced at no more than  $450 \, \text{mm}$  centres. Nogs or framing is required at the perimeter of the Fire Rated ceiling.

Alternatively, a proprietary I-joist system may be used subject to specific structural design and approved by the normal building consent process. Consult the joist manufacturer regarding construction of the solid blocking contained in the floor/ceiling to wall junctions.

### **Initial Floor**

Refer to James Hardie Secura™ Interior Flooring Fire Acoustic Floor System Installation Manual. 19mm thick James Hardie Secura™ Interior Flooring laid at right angles to the timber joists in a staggered pattern. Sheet edges other than tongue and groove must be supported over floor joists. When using the site cut sheet pieces, the minimum length of the cut sheet to be used must be 900mm or more.

### **Adhesive Requirement (Both flooring layers)**

A continuous 6mm bead of Adhesive to be applied over the joists or channels before laying the flooring materials.

Suitable Adhesive options are:

- · Bostik Seal n Flex-1 or
- Holdfast 220I M or
- Sikaflex 11FC

### **Fasteners**

### Initial Secura™ Floor Layer

Fix Secura<sup>TM</sup> Interior Flooring across the joists using angular grooved galvanised or stainless steel  $50 \times 2.87$ mm gun nails or can be screw fixed using a 50mm x 10g timber thread self-embedding screw.

### Floating Secura™ Floor Layer

Fix Secura<sup>TM</sup> Interior Flooring across the Acoustic Channels using 40-45mm x 8-10g self embedding steel screws.

### **Fastening Centres (Both flooring layers)**

Fix at 200mm centres along each joist or channel. Fasteners to be placed at 25mm min at long sheet edges and 12mm from transverse edges. Fastener edge distance of 50mm to be maintained at sheet corners.

### **Flooring Void**

James Hardie Acoustic Cradles are to be positioned on the James Hardie Secura™ Interior Flooring at 450mm centres max starting from the edge of the room. The Acoustic Cradles need not be aligned with the timber floor joists and can be laid in either direction.

The Cradles are not to be fixed down to the bottom flooring layer.

James Hardie Acoustic Channels to be placed inside the Acoustic Cradles. Acoustic Channels are spaced at 450mm centres maximum.

### **Flooring Void Sound Absorber**

Install Sound Absorber between the James Hardie Acoustic Floor Channels. Use 50mm thick R1.2 glass wool blanket with a minimum density of  $9.6 kg/m^3$ .

### **Floating Floor**

James Hardie Secura™ Interior Flooring to be laid at right angles to the Acoustic Channels and fixed at 200mm centres along the channel. Lay the sheets in a staggered pattern. Flooring edges other than tongue and groove must be supported by channels.

Allow 5-8mm gap between Secura $^{\text{TM}}$  Interior Flooring and the external/ internal walls. Fill the gaps with an acoustic sealant.

### **Acoustic Clip and Battens**

Fasten the Acoustic Clip to the joists at 1200mm centres max (and not less than 900mm centres) to support the metal ceiling battens.

Metal battens are spaced at 600mm centres maximum.

### **Ceiling Void Sound Absorber**

Install Sound Absorber between the joists above the metal ceiling battens. Use minimum 75mm thick R1.8 glass wool blanket with a minimum density of 9.6kg/m³.

### **Elephant Plasterboard Ceiling Lining**

Two layers of Elephant Plasterboard as per specified system above fixed at right angles directly to the underside of the metal battens. All sheet end butt joints shall occur on the battens. Offset the outer layer by 600mm from the inner layer. Sheet joints should be touched fitted.

### **Fixing of Elephant Plasterboard Internal Linings**

### Fasteners (As per Specified System Above)

System Number	1st Layer	2 <sup>nd</sup> Layer				
System Number	Self-Tapping Drywall Screws					
EFJ2DFA60-MS26	13mm	13mm				
EFJ2DFA60-M26	25 x 6g	41 x 6g				

### **Fastening Centres**

Ceiling sheets shall be fixed at 200mm centres along each metal ceiling batten with butt edges fixed at 100mm centres.

Fasteners to be placed no closer than 12mm from sheet edge.

Avoid outer layer screws from hitting inner layer screws.

### **Acoustic Sealant**

A bead of fire retardant Acoustic Sealant must be applied around the perimeter of the first layer and the second layer bedded on the bead.

### **Wall/Ceiling Junction**

The internal angle between the ceilings and walls must be protected by Cornice or square stopped corners taped and filled in accordance with Elephant Plasterboard Installation Guide.

### Jointing

Inner layer: Unstopped.

Outer Layer: All fastener heads stopped and all sheet joints reinforced with paper jointing tape and stopped in accordance with the publication entitled Elephant Plasterboard Installation Guide.

### **Additional Reference Material**

Refer to James Hardie Secura™ Interior Flooring Installation Manual and the James Hardie Fire and Acoustic Floor System Installation Manual for additional information covering general and wet area installation and penetrations and control joints.

### \*Impact Insulation Class (IIC)

IIC of 57 is achieved with a bare floor.

IIC of 58 is achieved with loose laid Vinyl.

IIC of 75 is achieved with 40oz loop pile carpet on 8mm foam chip underlay.

IIC of 76 is achieved with 40oz loop pile carpet on waffle underlay.



EFJ2DFA60


EPB & Floating James Hardie Secura™ Interior Flooring


**Full Intertenancy Accoustic** 

Direct Fix Clip Floating Floor/Ceiling - Timber Joist

**Load Bearing** 

### **Structural Detail**

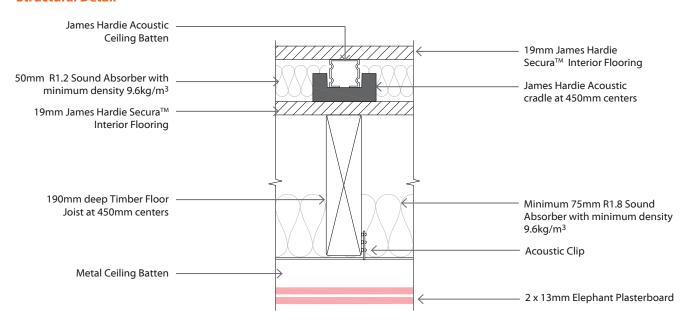

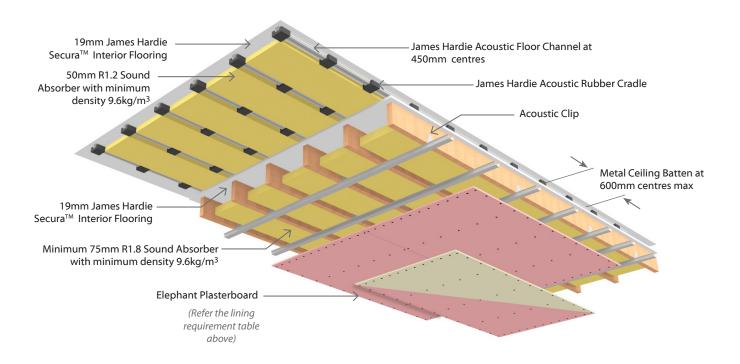

N.B. The above drawings are for illustrative purposes only.



## Construction Details

### **Boundary Wall & Post Fire Stability**

### **Post Fire Stability**

The fire rated walls built close to boundary are required to achieve post fire stability as per section 2.2.4 of B1/VM1 of the NZBC

The bottom plate of these walls can be fixed in accordance with the table shown below using Pryda® Brace Anchor or any equivalent hold downs on either side of the stud. These fixings ensure that when a boundary wall is exposed to post fire face loads, it doesn't collapse in any direction. Contact the project structural engineer for an alternate design to achieve post fire stability if the published solutions are not suitable for the project.

Note: Post fire stability for steel framing must be as per SED.

### **Framing**

The frame sizes and spacing mentioned in this manual are a minimum requirement. Bigger framing sections required to suit a proprietary cladding system or to suit higher wind pressures, will not affect the FRR, provided that the other system requirements presented in this manual are adhered to.

Higher levels of timber treatments or steel coating to enhance their durability will not alter the fire or acoustic performance of the systems. Sheet set-out must be determined by the designer including the location of all expansion and control joints to enable correct framing set-out (these must be in accordance with the relevant James Hardie product literature).

CONCRETE FOUNDATION								
Wall Height max (mm)	2400	3000	3000	3700				
Bottom Plate (mm)	90 x 45	90 x 45	140 x 45	140 x 45				
Stud Spacing max (mm)	400	300	600	400				
Nog Spacing (mm)	800	800	800	800				
Hold Down brackets	prackets Pryda® Bracing Anchor or any equivalent hold downs to both sides of t							


BLOCK WALL FOUNDATION						
Wall Height max (mm)	3000	3700				
Bottom Plate (mm)	140 x 45	140 x 45				
Stud Spacing max (mm)	600	400				
Nog Spacing (mm)	800	800				
Hold Down brackets	Pryda <sup>®</sup> Bracing Anchor or any equivale	nt hold downs to both sides of the stud				

TIMBER FOUNDATION							
	Joist parallel	Joist parallel Joist Perpend					
Joist min (mm)	190	190	190				
Wall Height max (mm)	2700	2700	3700				
Bottom Plate (mm)	140 x 45	140 x 45	140 x 45				
Stud Spacing max (mm)	600	600	300				
Nog Spacing max (mm)	800	800	800				
Hold Down brackets	Pryda <sup>®</sup> Bracing Anchor or any equivalent hold downs to both sides of the stud						

<sup>\*</sup>For higher stud heights, contact Elephant Plasterboard



Boundary Wall Bottom Plate Fixing - Concrete Foundation

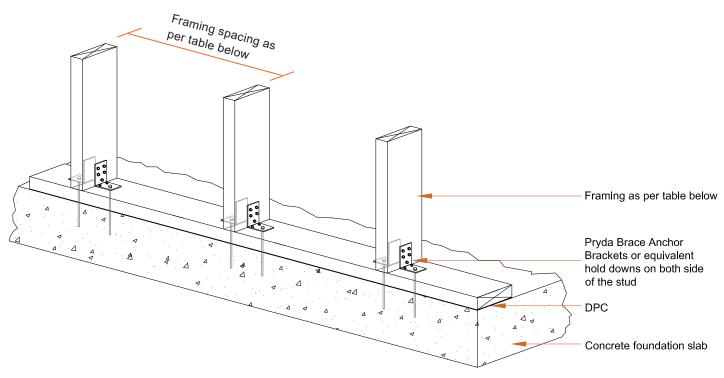



### Note:

This detail is only indicative, confirmation will be required by a structural engineer for stability NZBC B1 by designer. Elephant plasterboard (NZ) Ltd accepts no liability if not verified by an engineer

Wall Height max (mm)	2400	3000	3000	3700		
Bottom Plate (mm)	90 x 45	90 x 45	140 x 45	140 x 45		
Stud Spacing max (mm)	400	300	600	400		
Nog Spacing (mm)	800	800	800	800		
Hold Down brackets	Pryda <sup>®</sup> Brace Anchor or equivalent hold downs to both sides of each Stud					

### Post Fire Stability - Concrete Foundation

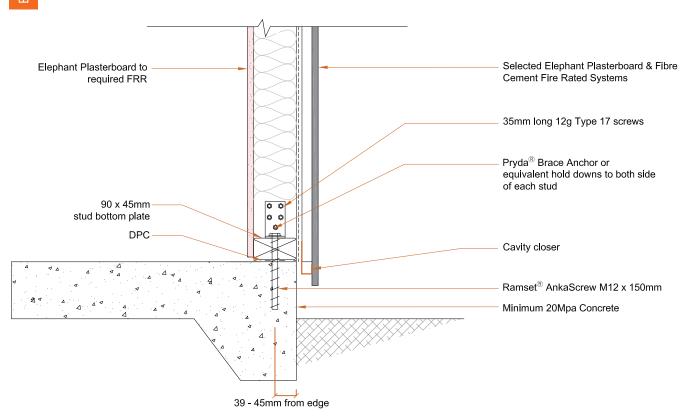


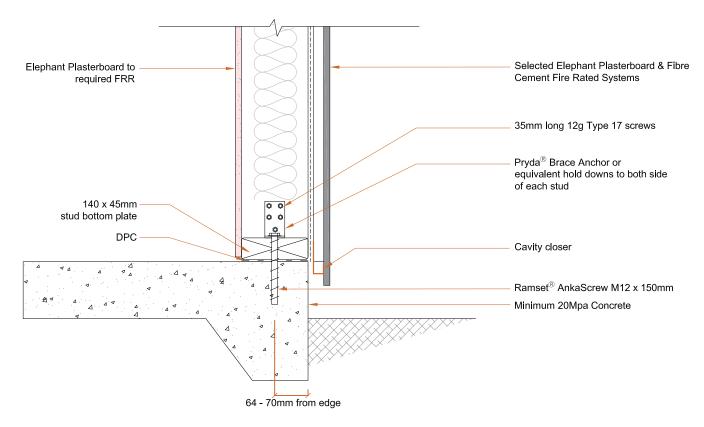

Wall Height max (mm)	2400	3000	3000	3700				
Bottom Plate (mm)	90 x 45	90 x 45	140 x 45	140 x 45				
Stud Spacing max (mm) 400		300	600	400				
Nog Spacing (mm)	800	800	800	800				
Hold Down brackets	Pryda® Brace Anchor or equivalent hold downs to both sides of each Stud							





Post Fire Stability - Block wall Foundation

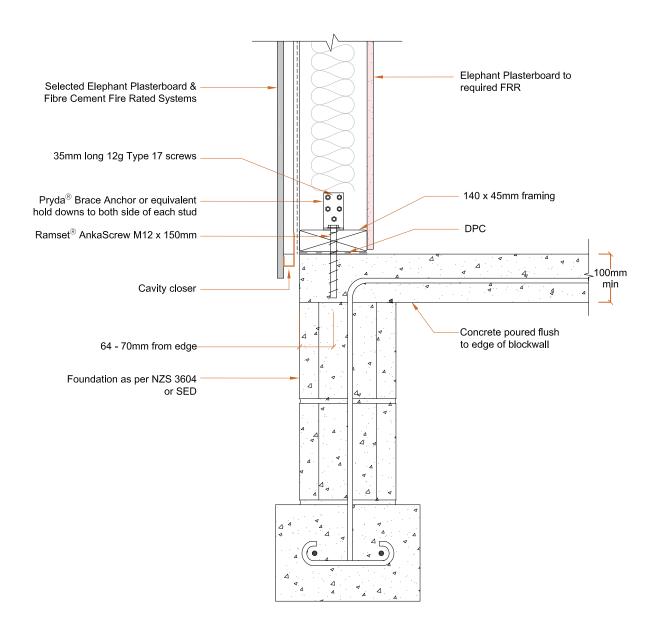

Wall Height max (mm)	3000	3700					
Bottom Plate (mm)	140 x 45	140 x 45					
Stud Spacing max (mm)	600	400					
Nog Spacing max (mm)	800	800					
Hold Down brackets	Pryda® Brace Anchor or equivalent hold downs to both sides of each Stud						

### Post Fire Stability - Timber Foundation

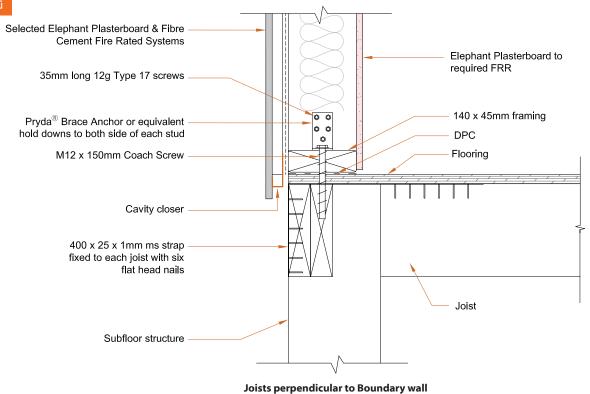


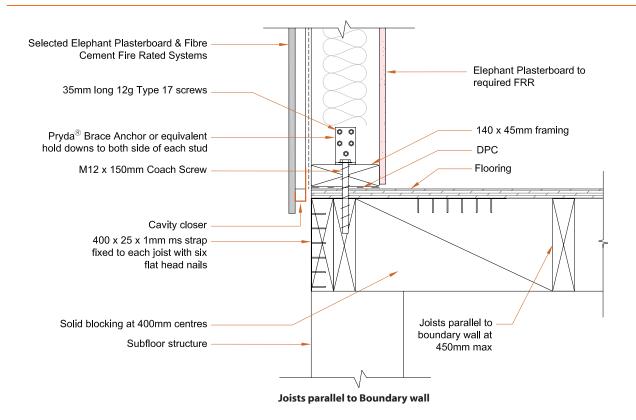


	Joist Perp	Joist Parallel				
Wall Height max (mm)	2700	3700	2700			
Bottom Plate (mm)	140 x 45	140 x 45	140 x 45			
Stud Spacing max (mm)	600	300	600			
Nog Spacing max (mm)	800	800	800			
Joist min (mm)	190	190	190			
Hold Down brackets	Pryda® Brace Anchor or equivalent hold downs to both sides of each Stud					




Soffit Detail

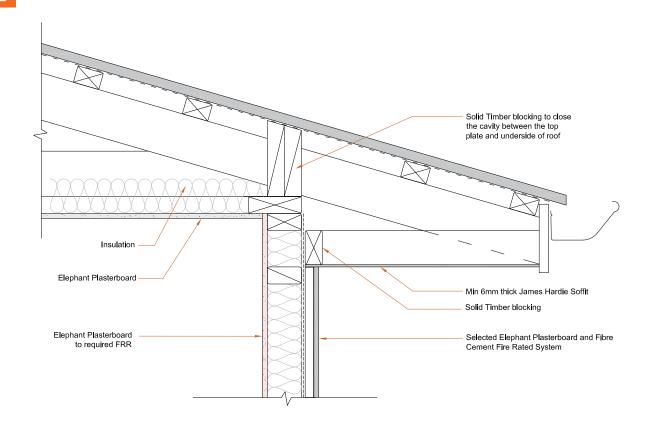


### Soffit Detail - 2

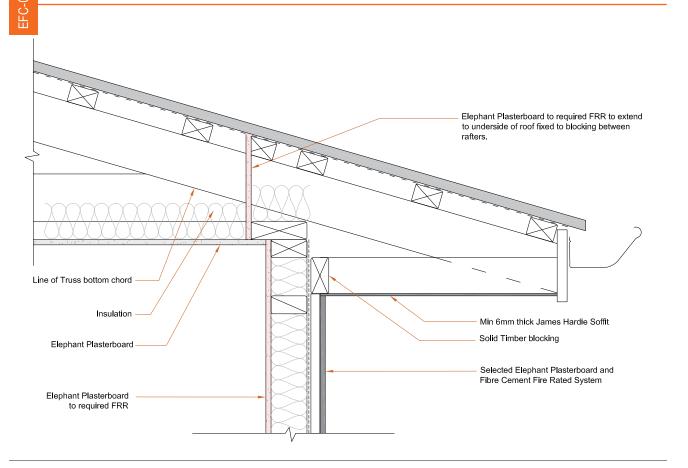


NIL Soffit Detail

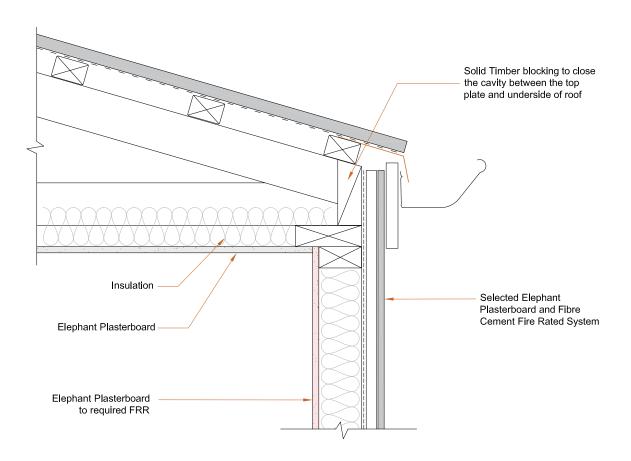

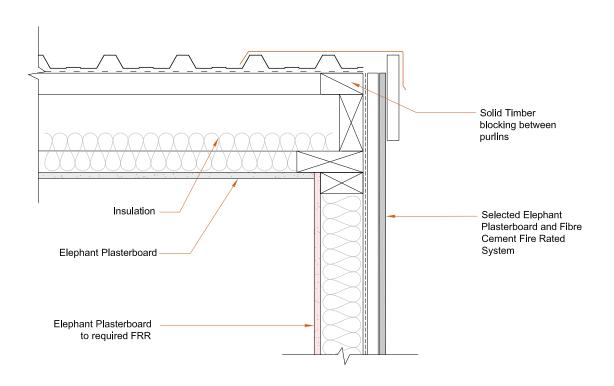





Timber Floor to Floor Intertenancy Wall Junction

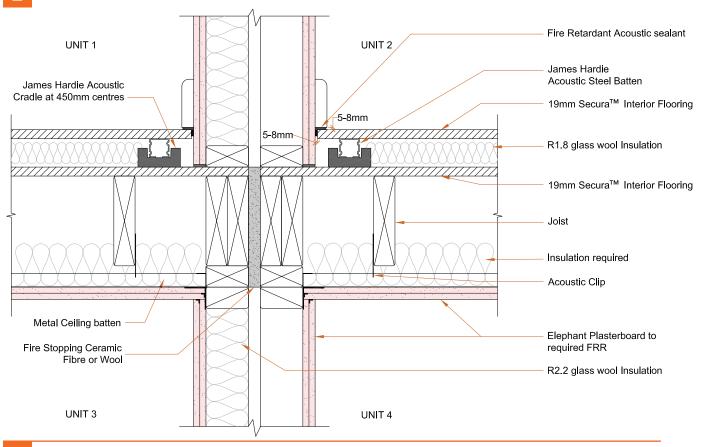


Concrete Slab to Timber Intertenancy Wall Junction

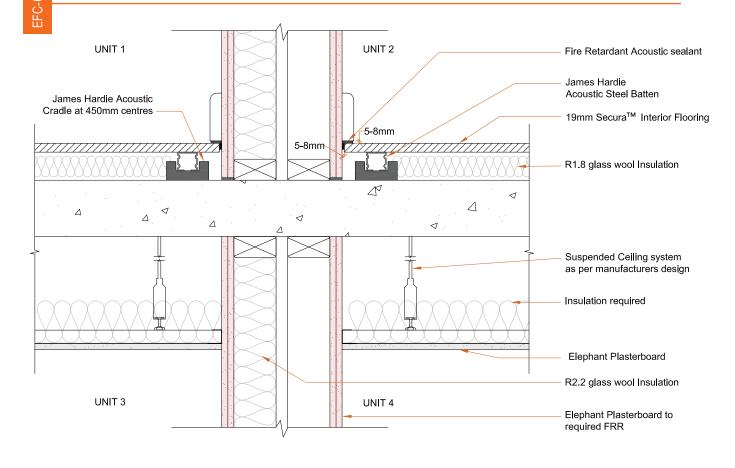

### Split Level Floor to Intertenancy Wall Junction

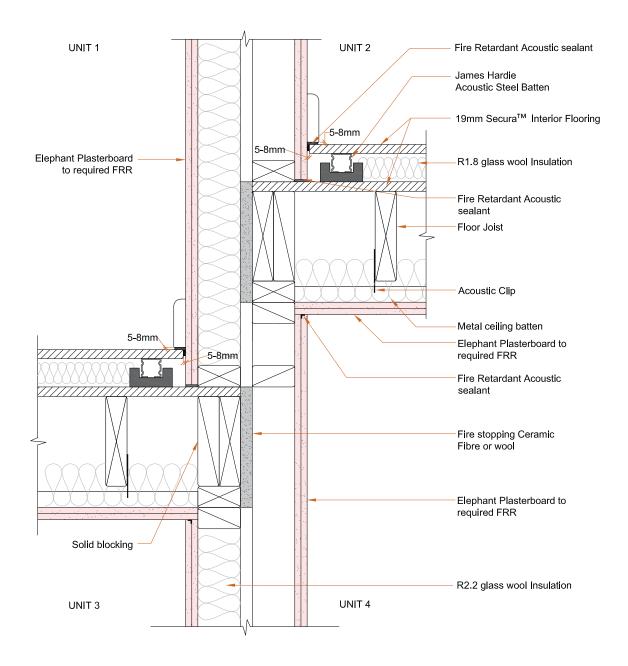


### Intertenancy Fire Separation

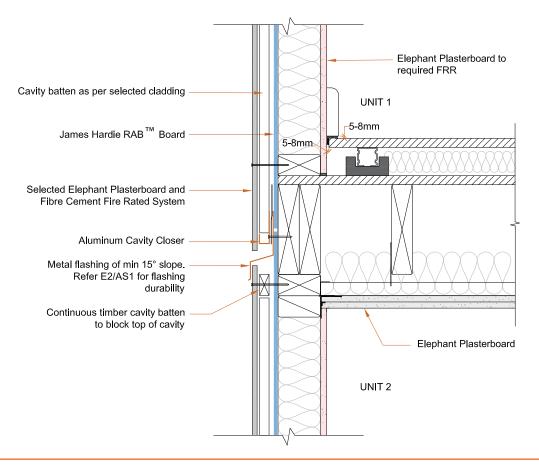


-012


Intertenancy Wall to External Wall Junction

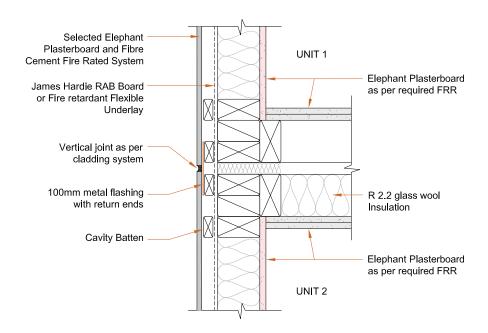

### Single Timber Frame Wall to External Wall Junction



For Systems where the difference in FRR between Wall A & B is 30 minutes or less




For Systems where the difference in FRR between Wall A & B is higher than 30 minutes, the lining of wall with higher FRR is continuous (Wall A in this example)



Freephone 0800 ELEPHANT (353 742)

Version update: February 2023

### Fire Cell Extension

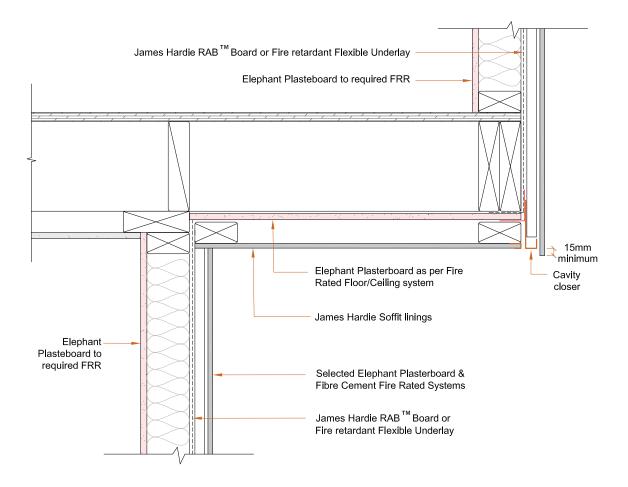

NOTES	



### **Elephant Plasterboard Product Range**

### **Product Weights and available Lengths**

THICK- NESS	ELEPHANT PLASTERBOARD PRODUCT RANGE	EDGE TYPE	WIDTH	WEIGHT	LENGTH							
mm			mm	Kg per m²	2.4m	2.7m	3.0m	3.3m	3.6m	4.2m	4.8m	6.0m
10	Standard		1200	6.9	✓	<b>√</b>						
10	Standard Horizontal		1200	6.9	✓		<b>√</b>		<b>√</b>	<b>√</b>	<b>✓</b>	<b>✓</b>
10	Standard Horizontal - Wide	TE/SE	1350	7.4					<b>√</b>		<b>√</b>	<b>✓</b>
13	Standard	TE/TE	1200	8.9	✓	✓	✓	✓	<b>√</b>	✓	<b>✓</b>	<b>✓</b>
10	CeilingSmart	TE/TE	1200	7.4	<b>✓</b>	✓	✓		✓		<b>√</b>	✓
10	FireSmart	TE/TE	1200	7.4	<b>✓</b>	✓	✓		<b>√</b>		✓	✓
13	FireSmart (MultiSmart)	TE/TE	1200	11.8	<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>			
16	FireSmart	TE/TE	1200	14.2	<b>✓</b>	<b>✓</b>	<b>✓</b>					
10	MultiSmart	TE/TE	1200	9.0	✓	✓	✓		✓		✓	
10	MultiSmart Horizontal	TE/SE	1200	9.0							✓	
13	MultiSmart	TE/TE	1200	11.8	✓	✓	✓	✓	✓			
10	0 AquaSmart		1200	8.4	✓	✓	✓		✓			
10	AquaSmart Horizontal		1200	8.4	<b>✓</b>						<b>√</b>	
13	AquaSmart	TE/TE	1200	11.2	✓	✓	✓		<b>√</b>			

TE/TE = Tapered Both Edges

TE/SE = Tapered One Edge, Square the Other

### **Product Primary Functions\***

THICK- NESS	ELEPHANT PLASTERBOARD PRODUCT RANGE	EDGE TYPE	WIDTH	Horizontal Fixing	Span 600 Centres on Ceilings	ing	Fire Resistance	Noise Control	Impact Resistant	Water Resistant
mm			mm	Hori	Spar on C	Bracing	Fi	Nois	lmps	Wate
10	Standard	TE/TE	1200			✓	✓			
10	Standard Horizontal	TE/SE	1200	$\checkmark$		✓				
10	Standard Horizontal -Wide	TE/SE	1350	✓		✓				
13	Standard	TE/TE	1200		✓		✓			
10	CeilingSmart	TE/TE	1200		<b>✓</b>	✓	✓			
10	FireSmart	TE/TE	1200		✓	✓	✓			
13	FireSmart (MultiSmart)	TE/TE	1200		✓	✓	✓	✓	✓	
16	FireSmart	TE/TE	1200				✓	✓	✓	
10	MultiSmart	TE/TE	1200		✓	✓	✓	✓		
10	MultiSmart Horizontal	TE/SE	1200	✓		✓				
13	MultiSmart	TE/TE	1200		✓	✓	✓	✓	✓	
10	AquaSmart	TE/TE	1200				✓	✓		✓
10	AquaSmart Horizontal	TE/SE	1200	✓						✓
13	AquaSmart	TE/TE	1200		✓		✓	✓		✓

\* The above table details the product's <u>Primary</u> functions. Some products may perform more than the functions indicated





### **Elephant Plasterboard Product Range**


**10mm Elephant Standard** 



13mm Elephant Standard









10mm Elephant MultiSmart

**MultiSmart** 

10mm Elephant Horizontal 13mm Elephant MultiSmart








10mm Elephant FireSmart/CeilingSmart

13mm Elephant FireSmart

**16mm Elephant FireSmart** 









10mm Elephant AquaSmart

10mm Elephant Horizontal 13mm Elephant AquaSmart **AquaSmart** 









### FOR MORE INFORMATION

EMAIL info@elephantplasterboard.co.nz

0800 ELEPHANT (353 742)