


Flexible Cavity Closer - 20mm

This uPVC cavity closer with a flexible edge is designed to reduce store range requirements and assist builders with onsite variation.



MASONS
Designed Smart, Built Tough.

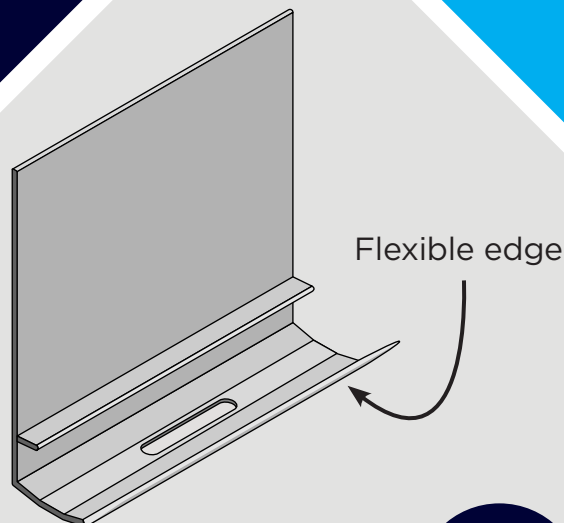

**TOP
SELLER**

Our most popular size in the cavity closer range

White - able to be painted to suit

High back to ensure ease of fixing

Proven and trusted product range in our harsh NZ environment

The function of the cavity closer is to prevent vermin intrusion and to promote weather tightness. Ventilation holes allow drainage and air ventilation to dry the cavity should moisture breach the external cladding.

Bottom ventilation permits a minimum of 1000m² per metre length of air into the cavity as specified by E2/AS1.

The New Zealand Building Code section E2/AS1 (9.1.8.2) requires using a cavity closer as part of properly constructing a drained cavity wall.



mpb.co.nz | 0800 522 533

Description	Size mm	Masons Code
Cavity Closer w/Flexi Edge	20mm x 2.74m	RDCCF20

Only available in packs of 10