

# METALCRAFT BEVELBACK WEATHERBOARD

## PURPOSE

Metalcraft supply Bevelback Weatherboard profiled metal sheet as a horizontally laid wall cladding.

## EXPLANATION


Metalcraft fabricates Bevelback Weatherboard from steel manufactured by NZ Steel. The steel is supplied in a range of protective coatings to meet NZ's exposure zones. Metalcraft Bevelback Weatherboard is available in the full Colorsteel® range.

The sheets are available in the following NZ Steel branded products:

- Colorsteel® Endura®
- Colorsteel® Maxx®
- Galvsteel®
- Zinalume®

Bevelback Weatherboard sheets are available in the following sizes:

- Thickness (mm): 0.40 and 0.55
- Width (mm): Cover – 812, Sheet – 842.

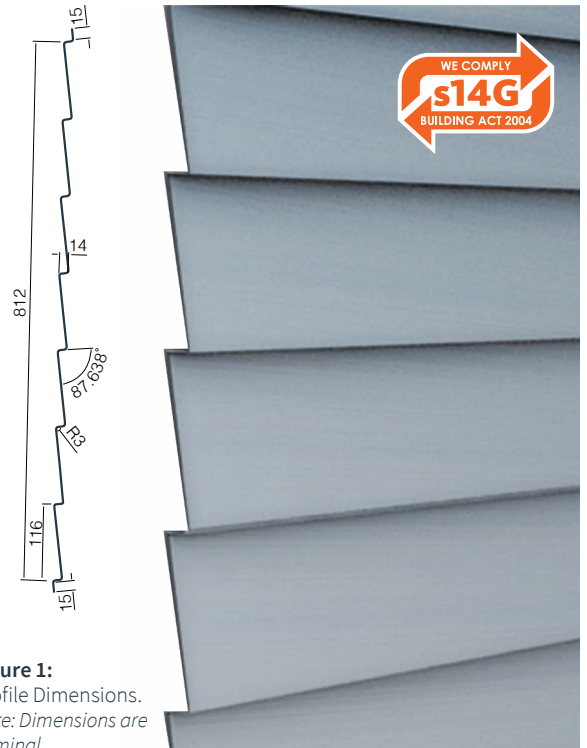

**Figure 1:**  
Profile Dimensions.  
Note: Dimensions are nominal.

## SCOPE AND LIMITATIONS OF USE

Scope	Limitations
<b>Location</b> In all wind zones as defined in NZS 3604:2011 and in all calculated design loads.	<ul style="list-style-type: none"> <li>➤ Metalcraft Bevelback Weatherboard load span tables apply in wind zones up to, and including, extra high.</li> <li>➤ Where the calculated design loads are greater than 2.5kPa the engineer must satisfy themselves that the product, pitch and fixings will meet the conditions.</li> </ul>
In all exposure zones defined by NZS 3604:2011.	<ul style="list-style-type: none"> <li>➤ In exposure Zone D, only Colorsteel® Endura® or Colorsteel® Maxx® may be used.</li> <li>➤ For use in microclimatic considerations (as defined in Section 4.2.4 NZS 3604:2011) refer to Metalcraft Roofing for technical advice.</li> </ul>
On buildings located any proximity to a relevant boundary.	<ul style="list-style-type: none"> <li>➤ Metalcraft Bevelback Weatherboard is non-combustible.</li> </ul>
<b>Building</b> On timber or steel structural framing.	<ul style="list-style-type: none"> <li>➤ A thermal break is required where Metalcraft Bevelback Weatherboard is used in conjunction with steel framing.</li> </ul>
In conjunction with a primary structure that complies with the NZ Building Code or where the designer has established that the existing structure is suitable for the intended building work.	<ul style="list-style-type: none"> <li>➤ Building height is limited by the Metalcraft Bevelback Weatherboard design load span tables (refer to: <a href="http://www.metalcraftgroup.co.nz">www.metalcraftgroup.co.nz</a>) unless specifically engineered.</li> </ul>
As a wall cladding.	<ul style="list-style-type: none"> <li>➤ A drained and ventilated cavity is always required unless the building is unlined or importance level 1, in which case the Metalcraft Bevelback Weatherboard may be direct fixed as per E2/AS1.</li> <li>➤ Flashings, flexible and rigid building underlays and fixings to be in accordance with E2/AS1 and NZMRM: Code of Practice (V3.0).</li> <li>➤ Contact with other materials must be in accordance with E2/AS1 and NZMRM: Code of Practice (V3.0).</li> </ul>

## PERFORMANCE CLAIMS

If designed, installed and maintained in accordance with all Metalcraft Roofing requirements, the Bevelback Weatherboard will comply with or contribute to compliance with the following performance claims:

NZ Building Code clauses	BASIS OF COMPLIANCE	
	Compliance statement <sup>1</sup>	Demonstrated by
<b>B1 Structure</b> B1.3.1, B1.3.2 B1.3.3 (a, b, c, d, g, i)	ACCEPTABLE SOLUTION B1/AS1	<ul style="list-style-type: none"> <li>➤ AS/NZS 1397:2011.</li> <li>➤ AS/NZS 1170:2002 (for span tables).</li> </ul>
<b>B2 Durability</b> B2.3.1 (b) B2.3.2 (b)	ACCEPTABLE SOLUTION B2/AS1	<ul style="list-style-type: none"> <li>➤ Coated in accordance with AS/NZS 2728:2013 (cited in E2/AS1).</li> </ul>
<b>C3 Fire Affecting Areas Beyond the Fire Source</b> C3.4 (a) C3.7 (a)	ACCEPTABLE SOLUTION C/AS1 C/AS2 1st Edition, June 2019	<ul style="list-style-type: none"> <li>➤ Steel is non-combustible.</li> <li>➤ BRANZ (FH 6102-TT, dated 3/1/2017) (Material Group 1-S).</li> <li>➤ BRANZ is accredited to perform ISO 5660 test.</li> </ul>
<b>E2 External Moisture</b> E2.3.1, E2.3.2, E2.3.7 (a, b, c)	ALTERNATIVE SOLUTION E2/AS1	<ul style="list-style-type: none"> <li>➤ NZMRM Code of Practice (V3.0).</li> </ul>
<b>F2 Hazardous Building Materials</b> F2.3.1	ALTERNATIVE SOLUTION Colorsteel® safety data sheet	<ul style="list-style-type: none"> <li>➤ Coating system is inert once dry.</li> <li>➤ Colorsteel® safety data sheets.</li> </ul>

1. The Compliance Statement is the pass holder's statement that they have met their obligations under s14G(2) of the Building Act 2004.

## NZ STEEL ASSURANCE

As the manufacturer of the steel, from which the Bevelback Weatherboard is fabricated, NZ Steel provides assurance that the steel:

- has been manufactured in accordance with AS 1397:2001
- is coated in accordance with AS/NZS 2728:2013 or galvanized in accordance with AS/NZS 2312.2:2014.

NZ Steel has established an Environmental Management System certified to ISO 14001.

For more information on the specific exposure zones and environmental impacts of the product refer to [www.colorsteel.co.nz](http://www.colorsteel.co.nz)

## SOURCES OF INFORMATION

- AS/NZS 1170:2002. *Structural design actions.*
- AS/NZS 1397:2001. *Steel sheet and strip—Hot-dip zinc coated or aluminium/zinc-coated.*
- AS/NZS 2728:2013. *Prefinished/pre-painted sheet metal products for interior and exterior building applications.*
- NZ Metal Roof Manufacturers (NZMRM): *Code of Practice (V3.0).*
- NZ Steel Technical Bulletin (August 2016) *Fire Testing. Fire Testing of Coated Steel Product.*

**VERSION:**  
.....

**DATE:**  
.....

Signed on behalf of Metalcraft Roofing:

*Note: Uncontrolled in printed format.*

**NAME:**  
.....

Frances Charles

**POSITION:**  
.....

National Sales & Marketing Mgr

By signing this pass™ the signatory confirms that, in respect of the subject of this pass™, the company has met their s14G obligations under the Building Act 2004.



**For more information visit [www.metalcraftgroup.co.nz](http://www.metalcraftgroup.co.nz)**