


GRIDLUX

GRIDLUX +

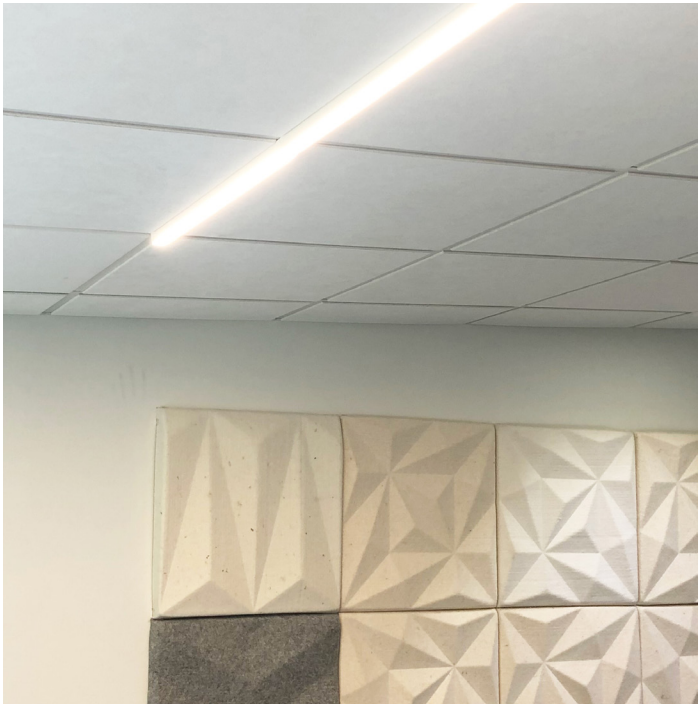

PRODUCT SUMMARY

Gridlux + is a light extrusion in 1200 and 600 module lengths which clip to the face of a suspended ceiling grid tee bar (main and cross tees). It can be fully integrated or retrofitted into any type of suspended ceiling as long as the tee web is 24mm.

Gridlux + offers full flexibility of design as it can be clipped to any part of the grid.

It creates a decorative and innovative lighting solutions suitable for offices, schools, and commercial interiors.


- Energy-saving LED technology.
- Complete system installed with flex and plug; can be used with Building Management System.
- Anodised and powder-coated aluminium extrusion body, steel mounting clips.
- Easy Installation to sit below existing ceiling grid. Easy to retrofit.
- This is a perfect acoustic solution; removing light panels in a ceiling results in more absorption across the ceiling surface.
- No lighting designs are available with this product.

GRIDLUX +

PRODUCT


DESCRIPTION

600mm Milky Diffuser

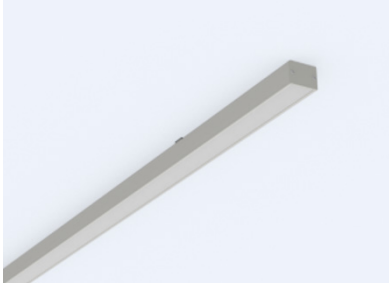


30W
2550lms
Ra80 3000K 4000K & 6000K in one fitting. Colour Selected by Dip Switch.
600mm length
Up to 85lms per W
Lumileds LED Chips
76 Degree Beam Angle
2 x 24mm Tee Grid Clips included
AC220-240V PF>0.9
Flicker Free
CE LVD:60598 EMC RoHS CCC
With 600mA CC driver + 1M AU plug

1200mm Milky Diffuser

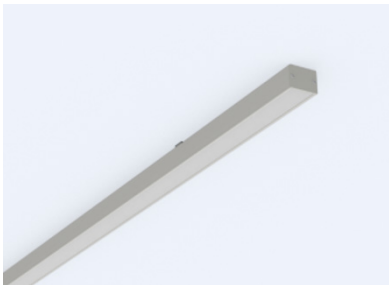

45W
3000lms
Ra80 3000K 4000K & 6000K in one fitting. Colour Selected by Dip Switch.
1200mm length
Up to 85lms per W
Lumileds LED Chips
76 Degree Beam Angle
2 x 24mm T Grid Clips included
AC220-240V PF>0.9
Flicker Free
With 1100mA CC driver +1M AU plug

1200mm Black Lourve Arosa

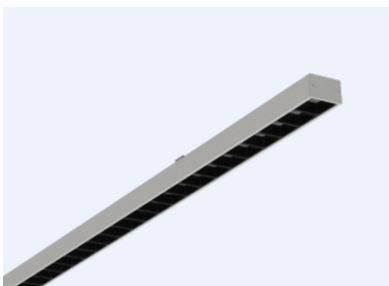

45W
2500lms
Ra80 3000K 4000K & 6000K in one fitting. Colour Selected by Dip Switch.
1200mm length
Up to 70lms per W
Lumileds LED Chips
73 Degree Beam Angle
2 x 24mm T Grid Clips included
AC220-240 PF>0.9
Flicker Free
With 900 mA CC driver