


Note: Ensure to alternate spacings of fixings for battens and Locator Clips to avoid risk of splitting batten

- Soffit lining
- Ulltraclad® UA 5833 Soffit ClipTop
Alternatively use UA 5832
- Minimum 5 mm clearance to allow for thermal expansion
- Ulltraclad® UA 5831 Soffit Base
Alternatively use UA 7584
- Cavity battens
Refer V00 Batten Options
- Note: Underlay strips to isolate aluminium from treated timber battens
Refer V00
- Ulltraclad® UA 7868 weatherboards (horizontal) fixed with Locator Clips fixed at Max 600 mm horizontal centres with 8g x 2" CSK Sq S/S self tapping screws through batten into stud
- Building Underlay
- Cavity battens
Refer V00 Batten Options
- Drained and vented cavity as per NZBC E2/AS1 (section 9.1.8)

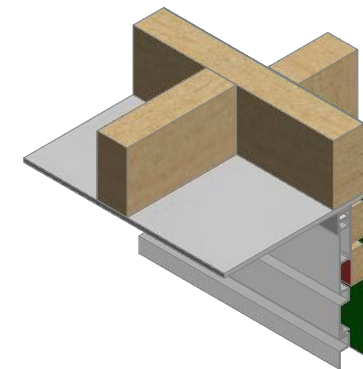

ULLTRA CLAD[®]
ALUMINIUM WEATHERBOARDS

ULLTRA CLAD ALUMINIUM CO LTD
PO Box 98 843 Manukau City Auckland 2241
118 Wiri Station Road Wiri 2104 New Zealand
TL 09 262 6262 Ext. 814 Mob 021 541 563
www.ulltraclad.co.nz
© ULLRICH ALUMINIUM - All Rights Reserved

H07

Rev : 10

Soffit Detail on Cavity
UA 7868 SHADO 140 BOARD

HORIZONTAL CAVITY SYSTEM
Scale: 1 : 2 @ A4 - 2019

Brnz Appraisal #487 2019. (Horizontal)