

Locator Clip UA 4535

Vertical cavity batten  
(corners only) fixed with  
6g x 1.25" CSK Sq S/S  
pre-drilled screws through  
batten into dwang / nog

Clearance hole in  
board larger than  
screw gauge to  
allow for thermal  
expansion

5 MIN

When ripping boards to custom widths use treated timber  
Packers with isolation strips to replicate leg support

Minimum 5 mm clearance to allow for thermal expansion

Ultracalad® UA 7094 Female Corner Flashing

Ultracalad® UA 7095 Male Corner Flashing fixed to timber battens with  
30 x 2.5 mm stainless steel clouts at 600 mm vertical centres

5 MIN

Face fix CSK aluminium Rivet through UA 7094  
Female Corner Flashing and UA 7401 weatherboard  
(vertical). Touch up with colour match paint

Note: Underlay strips to isolate aluminium  
from treated timber battens  
Refer V00

Cavity batten  
Refer V00 Batten Options


Building underlay continuous around corner

Locator Clips fixed at Max 600 mm vertical  
centres with 8g x 2" CSK Sq S/S self  
tapping screws through batten into dwang / nog

Wall frame

Interior lining

Note: Ensure to alternate spacings of  
fixings for battens and Locator Clips  
to avoid risk of splitting batten

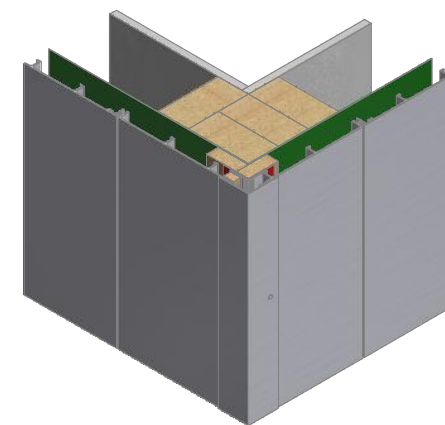

**ULLTRACLAD®**  
ALUMINIUM WEATHERBOARDS

ULLRICH ALUMINIUM CO LTD  
PO Box 98 843 Manukau City Auckland 2241  
118 Wiri Station Road Wiri 2104 New Zealand  
TL 09 262 6262 Ext. 814 Mob 021 541 563

www.ulltracalad.co.nz

© ULLRICH ALUMINIUM - All Rights Reserved

**V01**

Rev : 10

**External Corner on Cavity**  
**UA 7401 INFINITY BOARD**

**VERTICAL CAVITY SYSTEM**

Scale: 1 : 2 @ A4 - 2019

Brnz Appraisal #796 2019. (Vertical)