

Battens above window for fixing window head Starter UA 4533.  
Outer batten both sides to sit inside stopend of head flashing

Window Head Flashing (15° slope)  
folded stop end. (Note: not supplied  
with Ultraclad© system - contractor  
to supply as additional flashing)

Ultracalad® UA 4533 Head Starter 5 mm diameter drainage holes drilled through base of Head Starter at 300 mm centres

Ultracalad® UA 4533  
Head Starter


- Ulltraclad© Cavity Vent Strip
- Alternatively use PVC

— Ulltraclad® UA 5833  
Soffit Clip Top

– Ulltraclad® UA 7584  
Jamb Flashing

## Window Head Flashing Option 1


### Cut & Fold Stop End ( 1 : 2 )

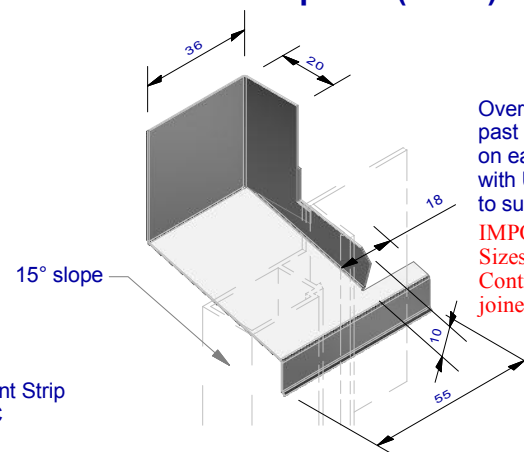

Overall Head Flashing length = +40 mm  
past edge of window and door joinery  
on each side. (Note: not supplied  
with Ultraclad© system - contractor  
to supply as additional flashing)

**IMPORTANT:**  
 Sizes shown are indicative only!  
 Contractor to confirm onsite as  
 joinery suites may vary.

**Window Head Flashing Option 2**  
**Wanz Plastic Stop End Cap ( 1 : 2 )**

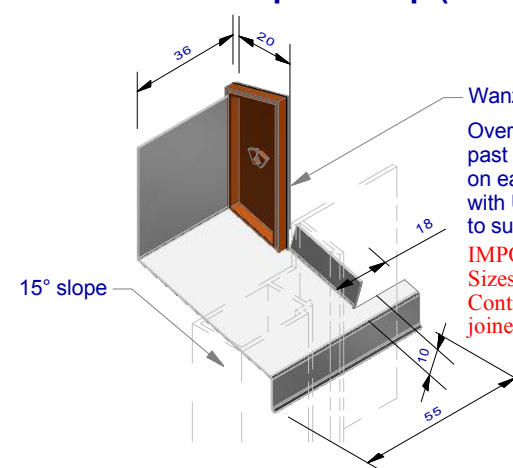

Wanz Plastic Stop End

Overall Head Flashing length = +40 mm  
past edge of window and door joinery  
on each side. (Note: not supplied  
with Ulltracal© system - contractor  
to supply as additional flashing)

**IMPORTANT:**  
 Sizes shown are indicative only!  
 Contractor to confirm onsite as  
 joinery suites may vary.

**ULLTRACLAD®**  
ALUMINIUM WEATHERBOARDS

ULLRICH ALUMINIUM CO LTD  
PO Box 98 843 Manukau City Auckland 2241  
118 Wiri Station Road Wiri 2104 New Zealand  
TL 09 262 6262 Ext. 814 Mob 021 541 563

[www.ultraclad.co.nz](http://www.ultraclad.co.nz)

© ULLRICH ALUMINIUM - All Rights Reserved

# V12

Rev : 10

**Head flashing / Head Starter / Jamb iso**  
**UA 7726 SHADO 100 BOARD**

## VERTICAL CAVITY SYSTEM

Scale: 1 : 3 @ A4 - 2019

Branz Appraisal #796 2019. (Vertical)