

Note: Underlay strips to isolate aluminium from treated timber battens Refer V00

Ulltraclad® UA 4528 weatherboards (horizontal) fixed with Locator Clips fixed at Max 600 mm horizontal centres with 8g x 2" CSK Sq S/S self tapping screws through batten into stud

Cavity batten Refer V00 Batten Options

Ulltraclad® Cavity Vent Strip Alternatively use PVC type

Fixed to lintel at 600 mm centres with 50 x 2.5 mm stainless steel clout


Vertical track flashing 0.9 mm folded aluminium flashing (hemmed) 150 mm above Meter Box head or inter-storey. Alternatively use Dynex Dynafash

Ulltraclad® UA 4533 Head Starter 5 mm diameter drainage holes drilled through base of flashing at 300 mm centres

Aluminium flashing 15° slope (Note: not supplied with Ulltraclad® system - contractor to supply as additional flashing)

20mm x 20mm angle sealed and riveted to meter box

Note: Ensure to alternate spacings of fixings for battens and Locator Clips to avoid risk of splitting batten

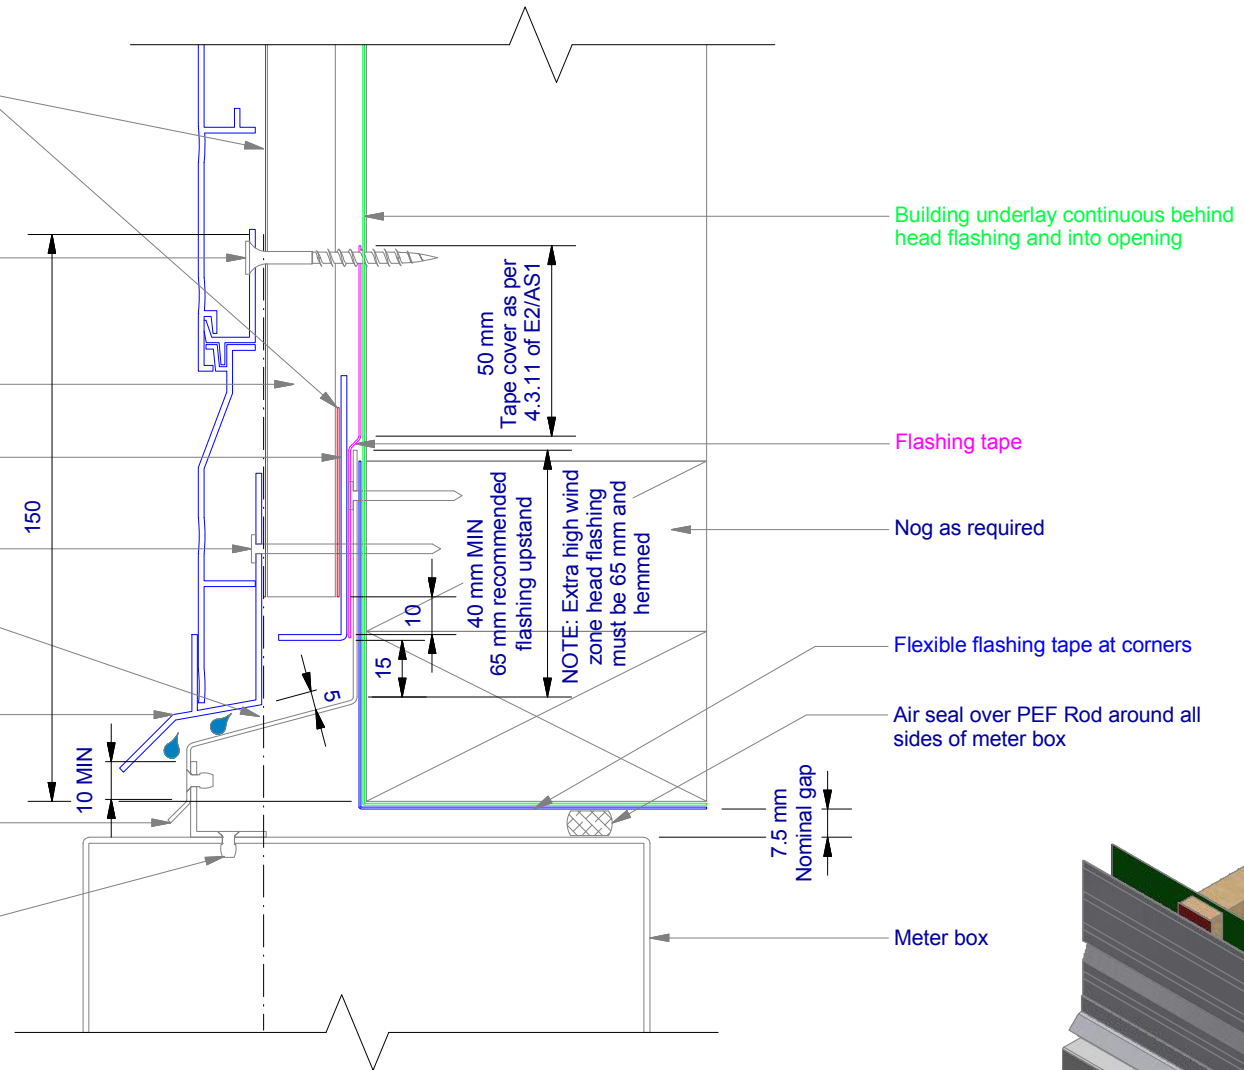

Building underlay continuous behind head flashing and into opening


Flashing tape

Nog as required

Flexible flashing tape at corners

Air seal over PEF Rod around all sides of meter box

Meter box

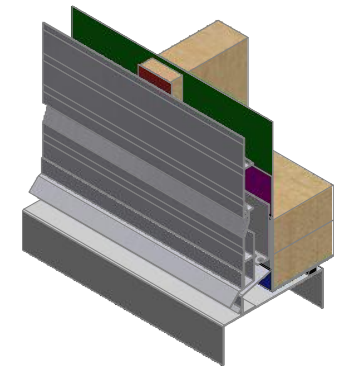

**ULLTRACLAD®**  
ALUMINIUM WEATHERBOARDS

ULLTRACLAD ALUMINIUM CO LTD  
PO Box 98 843 Manukau City Auckland 2241  
118 Wiri Station Road Wiri 2104 New Zealand  
TL 09 262 6262 Ext. 814 Mob 021 541 563

www.ulltraclad.co.nz

© ULLRICH ALUMINIUM - All Rights Reserved

**H16**

Rev : 10

**Meter Box Head on Cavity**  
**UA 4528 STANDARD BOARD**

**HORIZONTAL CAVITY SYSTEM**

Scale: 1 : 2 @ A4 - 2019

Brnz Appraisal #487 2019. (Horizontal)