


DE379ENC

BINOPTIC WALL MOUNTED ELECTRONIC BASIN TAP

DELABIE

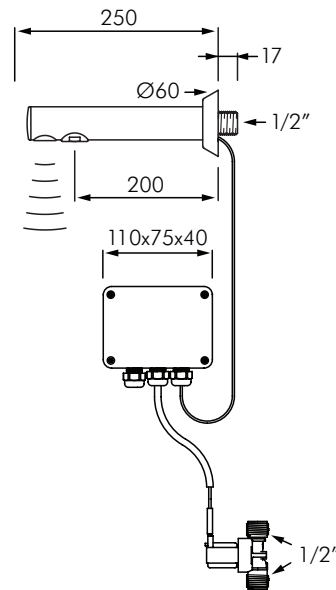

DESCRIPTION

DELABIE DE379ENC is a wall mounted electronic basin tap with independent IP65 electronic control unit and shock-proof infrared presence detection sensor at the end of the spout. Available as 230/12V mains supply with transformer. Anti-bacterial duty flush operates for ~60 seconds every 24 hours after last use. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated brass body and spout L.200mm for wall mounting with hygienic scale-resistant flow straightener. Spout has a smooth interior and low volume of water (limits bacterial niches).

Supplied with M1/2" solenoid valve and filter.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Wall mounted connection M1/2".
- Maximum Hot water temperature 55°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly on the flow straightener.
- Ensure basin waste position does not conflict with position of tap sensor. Minimum distance above basin top is 150mm.

MODELS

DE379ENC - Standard model 3L/min - 6 star WELS rating.

DE379DER - Same as DE379ENC but through wall version for ≤ 190 mm wall.



**MACDONALD
INDUSTRIES LIMITED**

Auckland (Head Office)

20 Carr Rd, Three Kings

Auckland 1041

P: 09 624 1115

F: 09 624 1110

E: sales@macdonaldindustries.co.nz

Wellington

P: 04 569 8033

F: 04 569 8066

Christchurch

P: 03 348 2356

F: 03 348 2376

www.macdonaldindustries.co.nz