
DE494000

TEMPOMATIC MIX 2 ELECTRONIC BASIN MIXER

DELABIE



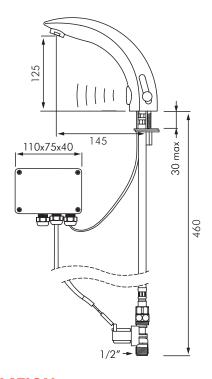

DESCRIPTION

DELABIE DE494000 is a deck mounted electronic basin mixer with independent IP65 electronic control unit and shock-proof infrared presence detection sensor. Available as 230/12V mains supply with transformer or 6V Lithium battery power. Anti-bacterial duty flush operates for ~60 seconds every 24 hours after last use. Side temperature control with standard lever and adjustable maximum temperature limiter. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with hygienic scaleresistant flow straightener and reinforced fixing.

Supplied with PEX flexible connectors, solenoid valves, filters and M1/2" stopcocks.

INSTALLATION

- Deck mounted through Ø34mm hole.
- Reinforced fixation using 2x stainless steel fixing screws and support ring.
- 230V AC power connection to control box.
- 400mm PEX flexibles with filters & solenoids connect to 1/2" water supply.
- Equal Hot & Cold supply pressure (max 15% variation).
- Maximum Hot water temperature 55°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly on the flow straightener.

MODELS

DE494000

- Standard model 3L/min - 6 star WELS

DE494006

- Same as DE494000 but battery powered.

DE494000LH - Same as DE494000 but with long handle side temperature control.



Auckland (Head Office)

20 Carr Rd, Three Kings Auckland 1041 P: 09 624 1115

F: 09 624 1110

E: sales@macdonaldindustries.co.nz

Wellington

Christchurch

P: 04 569 8033 F: 04 569 8066

P: 03 348 2356

F: 03 348 2376