


DE443406

TEMPOMATIC 4 ELECTRONIC BIB TAP

DELABIE

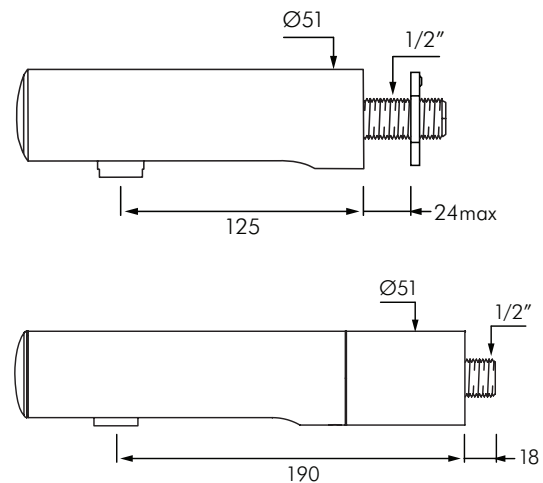

DESCRIPTION

DELABIE DE443406 is a wall mounted battery powered electronic basin tap with a reduced stagnation solenoid valve and electronic unit with 6V Lithium battery integrated into the body of the tap. Anti-bacterial duty flush operates for ~60 seconds every 24 hours after last use. Flow rate is pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with hygienic scale-resistant flow straightener.

Supplied wall mounting M1/2".

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Wall mounted connection M1/2".
- Maximum Hot water temperature 55°C.
- Flow rate pre-set at 3L/min at 300kPa, can be adjusted from 1.5 to 6L/min by using a 2.5mm Allen key directly on the flow straightener.
- Ensure basin waste position does not conflict with position of tap sensor. Minimum distance above basin top is 150mm.
- Low battery life will cause LED to blink for 15 days.
- Battery is replaced from within the electronic unit, access via removal of 2x 2.5mm Allen key screws.

MODELS

DE443406 - Standard model 3L/min - 6 star WELS rating.

DE443506 - Same as DE443406 but with L190mm spout.



**MACDONALD
INDUSTRIES LIMITED**

Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1041

P: 09 624 1115

F: 09 624 1110

E: sales@macdonaldindustries.co.nz

Wellington

P: 04 569 8033

F: 04 569 8066

Christchurch

P: 03 348 2356

F: 03 348 2376

www.macdonaldindustries.co.nz