
DE741500TEMPOSOFT 2 TIME FLOW BIB TAP

DELABIE



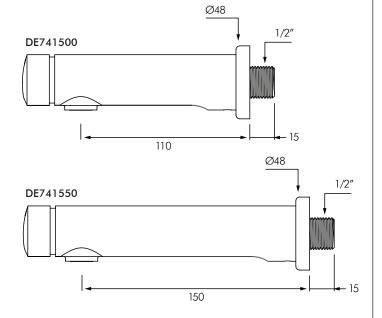

DESCRIPTION

DELABIE DE741500 is a wall mounted time flow basin tap with a soft touch operation. Soft touch operation allows users to press the control with no effort especially children, elderly or people with reduced physical ability. Time flow is \sim 7 seconds. Flow rate is pre-set at 3L/min at 300kPa. Operating pressure is 100-500kPa, 300kPa is recommended. Chrome-plated solid brass body with tamperproof scale-resistant flow straightener and M1/2" fixing.

Supplied with red and blue indicators.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Wall mounted connection M1/2".
- M1/2" water supply connection.
- For cold or tempered single water supply.
- Maximum Hot water temperature 55°C, recommended tempered supply of ~40°C.
- Flow rate pre-set at 3L/min at 300kPa, adjustable.

MODEL

DE741500 - Standard model 3L/min - 6 star WELS

DE741550 - Same as DE741500 but with L.150 spout.





Auckland (Head Office)

20 Carr Rd, Three Kings Auckland 1041 **P**: 09 624 1115

F: 09 624 1110

E: sales@macdonaldindustries.co.nz

Wellington

P: 04 569 8033 **F**: 04 569 8066

Christchurch

P: 03 348 2356 **F**: 03 348 2376

www.macdonaldindustries.co.nz