


DE714700 SPORTING 2 SHOWER PANEL

DELABIE

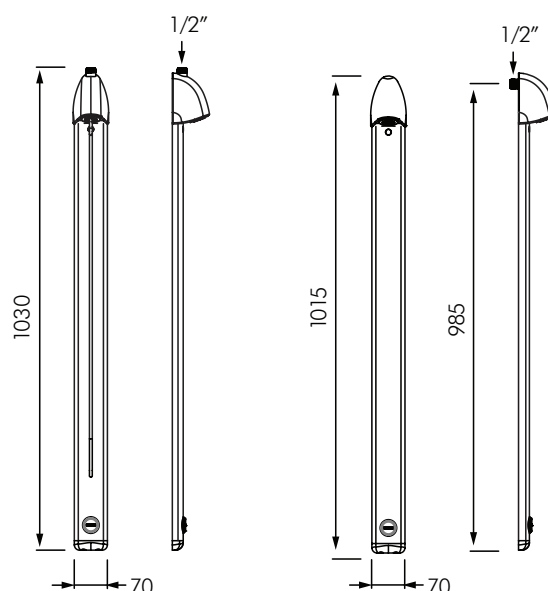

DESCRIPTION

DELABIE DE714700 is a time flow shower panel for surface mounting with soft touch operation. The water inlet is adjustable for top or back inlet with integrated stopcock. Slimline structure with concealed fixings. Anodised aluminium panel with satin chrome tamperproof fixed shower head with scale resistant outlet and automatic flow regulator. Adjustable spray angle can be locked in place. Time flow ~30 seconds. Flow rate 6L/min at 300kPa. Operating pressure 100-500kPa, 300kPa is recommended.

Supplied with non-return valve, filter, integrated stopcock and M1/2" connection for mixer water supply.

We recommend installing a thermostatic mixing valve (see Water Tempering section).

INSTALLATION

- Surface mounted shower panel with soft touch operation and tamperproof shower head.
- For cold or tempered single water supply.
- M1/2" adjustable inlet with non-return valve, filter and integrated stopcock.
- Panel screw fixes to wall in position to achieve desired height.
- Flow rate 6L/min at 300kPa.
- Operating water pressure 100-500kPa.
- Adjustable spray angle can be locked in place.

MODELS

DE714700 - Standard model 6L/min - 3 star WELS rating.

Auckland (Head Office)

20 Carr Rd, Three Kings
Auckland 1042
09 624 1115
sales@macdonaldindustries.co.nz
macdonaldindustries.co.nz

Christchurch

32B Hayton Road
Wigram, Christchurch
03 348 2356
christchurch@macdonaldindustries.co.nz

Wellington

04 569 8033