EUROSTYLE SPANLOK™ ROOFING
DORMER VALLEY DETAIL

ROOFING INDUSTRIES
EUROSTYLE SPANLOK™
SECRET CLIP FIXED

STOPEND PROFILE

UNDERLAY

RIGID ROOFING
SUBSTRATE

FLASHING FIXED TO PURLINS
AT 200crs MAX

VALLEY FLASHING

VALLEY RAFTER
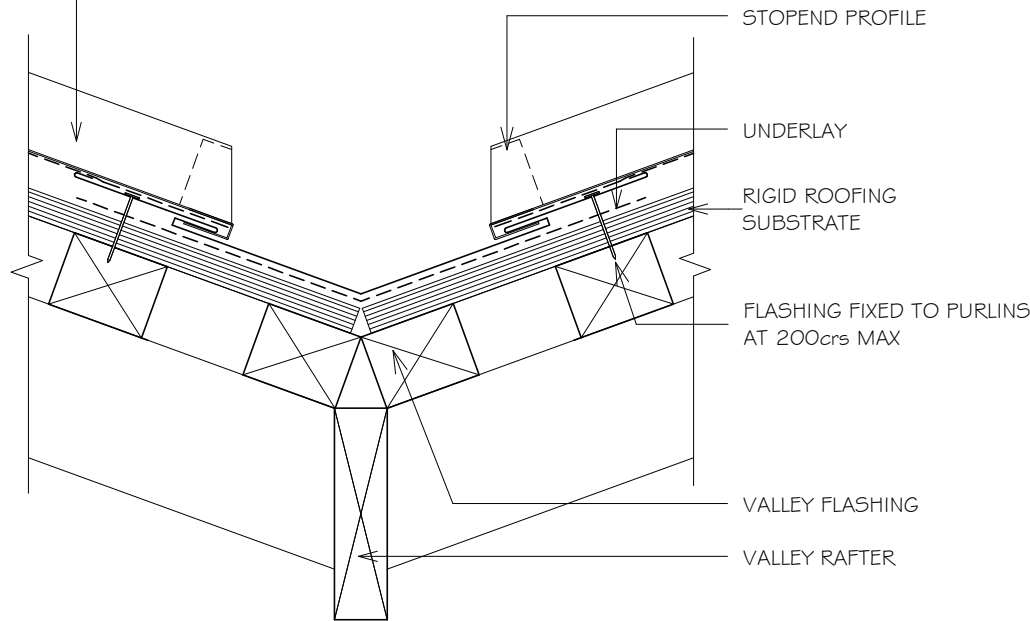
NOTES:

1.   ALLOW FOR SEPARATION FROM ANY CORROSIVE TIMBER TREATMENTS.
2.   ALL DIMENSIONS SHOWN ON DRAWINGS ARE NOMINAL +/- 5mm
3.   HIGH TO EXTRA HIGH WIND ZONE DOUBLE FIX UNDERFLASHINGS
4.   DORMER VALLEY MINIMUM PITCH 12 DEGREES.

100   30   130   50 min.   130   30   100
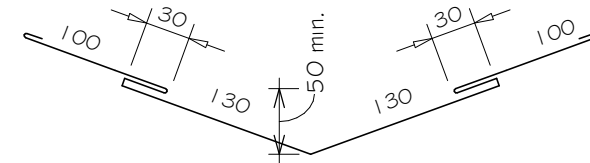
(Dimensions are indicative only)

Copyright detail © 2017

ROOFING Industries

roof.co.nz