
## EUROSTYLE SPANLOK® VARIABLE PAN(VP) WALL CLADDING ON CAVITY EXTERNAL CORNER FOR VERTICAL CLADDING ON CAVITY WITH CLADDING CHANGE

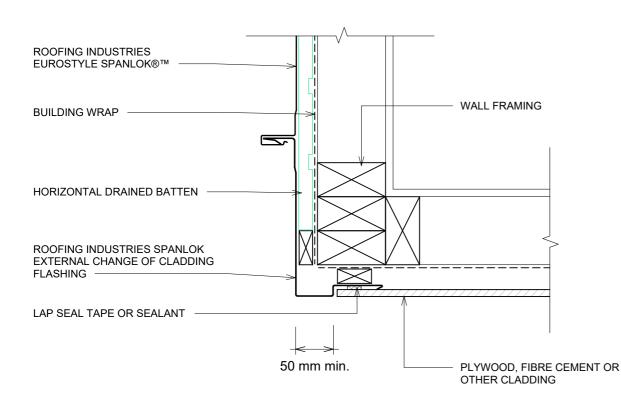

## GENERAL NOTES:

- These details are to be read with Roofing Industries SPANLOK® Product Technical Statement and installation guide.
- These details are generally in compliance with E2/AS1 and/or the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimatley responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure including cavity battens are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1.
- Details are for steel based materials, other substrates may require some changes.
- All dimensions are nominal

Detail Number: RI-ESRWVC-030B


Date drawn: 03/04/2025

Scale: 1:5@ A4

## DETAIL ANNOTATION:

- TREATED TIMBER CAVITY BATTENS CONTAINING 1 CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING
- 2 CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM
- FASTENERS TO BE COMPATIBLE WITH MATERIAL 3 BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED
- 4 CLIPS OMITTED FOR CLARITY, FIXED WITH TWO 10-16x64mm C4 FLAT HEAD T17 SCREWS PENETRATING THROUGH BATTENS MIN. 30mm INTO PRIMARY STRUCTURE
- 5 HIGH TO EXTRA HIGH WIND ZONES DOUBLE FIX UNDERFLASHING

TWO PIECE FLASHING OPTION



(C) <sub>2025</sub> Copyright detail

