
## EUROSTYLE ANGLE STANDING SEAM™ ROOFING PENETRATION FLASHING CROSS SECTION

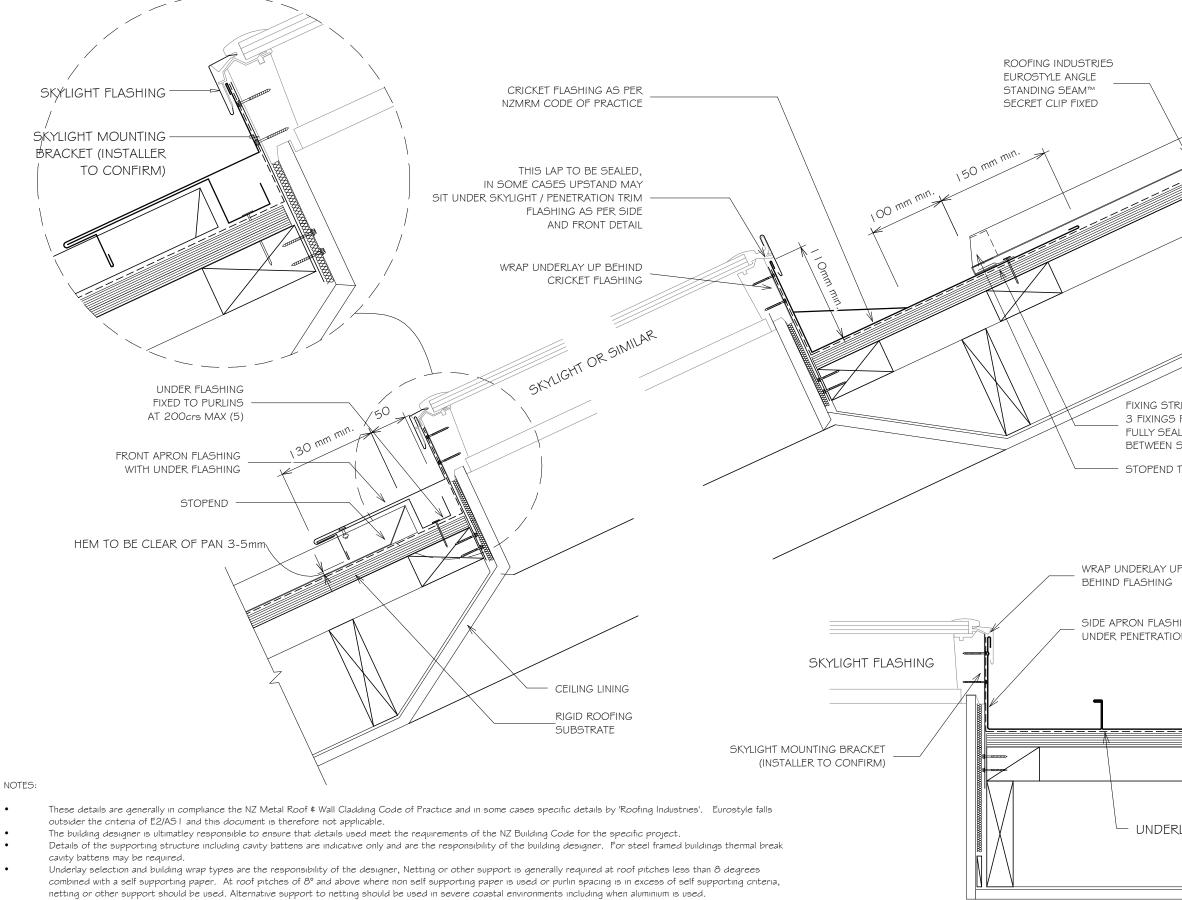

- netting or other support should be used. Alternative support to netting should be used in severe coastal envir
  These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- These details to be read with Roofing Industries profile technical summary regarding wind loads and fixings.
- Further information can be obtained from the NZ Metal Roof  $\notin$  Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1.

Detail Number: RI-EASRO81A Date drawn: 02/02/2018 Scale: 1:5@ A3

	NOTE:	
	I.	REFER TO NZMRM CODE OF
	1.	
RIP WITH		PRACTICE FOR CATCHMENT AREA
PER PAN		LIMITATIONS.
LED IN	2.	REFER TO NZMRM CODE OF
SURFACES		PRACTICE FOR FURTHER
		INFORMATION.
TO PROFILE	3.	REFER TO SKYLIGHT
	0.	MANUFACTURERS DETAILS AS
		SOME LOW PITCH INSTALLATIONS
		REQUIRE MODIFICATIONS TO
		THESE DETAILS.
Р	4.	SKYLIGHT MOUNTING BRACKETS
1		ARE INDICATIVE ONLY AND
		DIFFERENT SKYLIGHTS /
		PENETRATIONS MAY REQUIRE
IING		
ON FLASHING		DIFFERENT FRAMING, MOUNTING
		AND FLASHING DETAILS.
	5.	HIGH TO EXTRA HIGH WIND ZONE
		DOUBLE FIX UNDERFLASHINGS.
I	6.	ALLOW FOR SEPARATION FROM
	0.	ANY CORROSIVE TIMBER
	_	TREATMENTS.
	7.	ALL DIMENSIONS SHOWN ON
		DRAWINGS ARE NOMINAL +/- 5mm
		Copyright detail (C) 2017
5		
2LAY		
		1.05
		anting
		RUUT
		Roofing Industries
		indust
I		
		c an nz
		roof.co.nz