
EUROSTYLE ROLL CAP WALL CLADDING WINDOW / DOOR SILL FLASHING FOR VERTICAL CLADDING ON CAVITY





Continuous seal

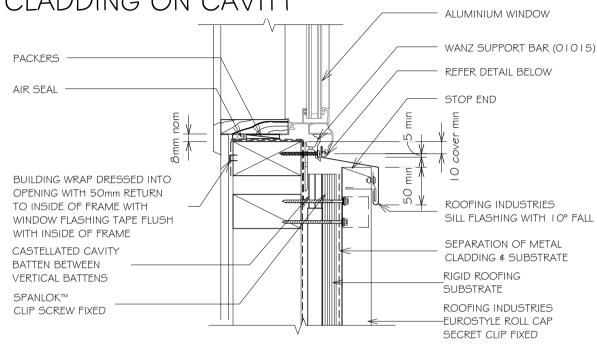

Hem to be clear of pan 3-5mm

Sill flashings stop ended to receive jamb flashings (Dimensions are indicative only \$ show minimum lap covers)



NOIE:
Sill sealing method for flange end type drainage systems

NOTES:

- These details are generally in compliance the NZ Metal Roof \$ Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'. Eurostyle falls outsider the criteria of E2/AS I and this document is therefore not applicable.
- The building designer is ultimatley responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure including cavity battens are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Underlay selection and building wrap types are the responsibility of the designer.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- These details to be read with Roofing Industries profile technical summary regarding wind loads and fixings.
 - Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS I.

Detail Number: RI-ERCWO12C

Date drawn: 02/02/2018

Scale: 1:5@ A4

GENERAL NOTES:

- I. REFER TO E2/AS I FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
- A MIN. OF 8mm EFFECTIVE COVER AT SILLS SHALL BE PERMITTED WHERE NECESSARY TO ALLOW FOR TOLERANCES.
- WINDOW PROFILE TO BE SELECTED TO ACHIEVE COVER SHOWN IN DETAILS.
- ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY
 ONLY, DETAIL MAY BE USED WITH REBATED LINER.
- 5. WHERE SUPPORT BRACKETS ARE REQUIRED BY THE WINDOW MANUFACTURER TO CARRY THE FRAME AND GLAZING LOADS THEY MUST BE SUPPLIED AS AN INTEGRAL PART OF THE WINDOW MANUFACTURER'S RECOMMENDATIONS.
- 6. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
- 7. ALLOW FOR SEPARATION FROM ANY CORROSIVE TIMBER TREATMENTS.
- ALL DIMENSIONS SHOWN ON DRAWINGS ARE
 NOMINAL +/- 5mm
- CASTELLATED TIMBER BATTEN OR APPROVED
 DRAINED BATTEN MAY BE USED WITH THIS SYSTEM.

REFERENCE FLASHINGS:
NZ METAL ROOF AND WALL CLADDING
CODE OF PRACTICE. E2/AS I OR
REFER MANUF DETAILING.
DIMENSIONS ARE INDICATIVE ONLY

Copyright detail



2017

