RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX SHEET LIST

Detail Number: RI-RSCRRWVD-00A
Date drawn: 25/08/2026
Scale: @ A3

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX		
Sheet Number	Type	Sheet Name
RI-RSCRRWVD-00A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	SHEET LIST
RI-RSCRRWVD-00B	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	PROFILES & ACCESSORIES
RI-RSCRRWVD-00C	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	PROFILE SUMMARY
RI-RSCRRWVD-010A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	BARGE
RI-RSCRRWVD-020A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	HEAD BARGE
RI-RSCRRWVD-030A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	STANDARD EXTERNAL CORNER OPTION 1
RI-RSCRRWVD-030B	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	STANDARD EXTERNAL CORNER OPTION 2
RI-RSCRRWVD-030C	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	EXTERNAL CORNER WITH CLADDING CHANGE OPTION 1
RI-RSCRRWVD-030D	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	EXTERNAL CORNER WITH CLADDING CHANGE OPTION 2
RI-RSCRRWVD-040A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	STANDARD INTERNAL CORNER OPTION 1
RI-RSCRRWVD-040B	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	STANDARD INTERNAL CORNER OPTION 2
RI-RSCRRWVD-040C	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	INTERNAL CORNER WITH CLADDING CHANGE OPTION 1
RI-RSCRRWVD-040D	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	INTERNAL CORNER WITH CLADDING CHANGE OPTION 2
RI-RSCRRWVD-050	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	BOTTOM OF CLADDING
RI-RSCRRWVD-060A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	SOFFIT FLASHING
RI-RSCRRWVD-070A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	SLOPING SOFFIT FLASHING
RI-RSCRRWVD-090A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	VERTICAL BUTT JOINT WITH CLADDING CHANGE OPTION 1
RI-RSCRRWVD-090B	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	VERTICAL BUTT JOINT WITH CLADDING CHANGE OPTION 2
RI-RSCRRWVD-090C	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	VERTICAL BUTT JOINT WITH CLADDING CHANGE OPTION 1
RI-RSCRRWVD-090D	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	VERTICAL BUTT JOINT WITH CLADDING CHANGE OPTION 2
RI-RSCRRWVD-100	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	JUNCTION FLASHING
RI-RSCRRWVD-110A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	BALUSTRADE
RI-RSCRRWVD-120A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	HEAD FLASHING RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 1
RI-RSCRRWVD-120A-1	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	HEAD FLASHING RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 2
RI-RSCRRWVD-120B	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	JAMB FLASHING RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 1
RI-RSCRRWVD-120B-1	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	JAMB FLASHING RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 2
RI-RSCRRWVD-120C	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	SILL FLASHING RECESSED WINDOW/DOOR FRAMING LINE OPTION 1
RI-RSCRRWVD-120C-1	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	SILL FLASHING RECESSED WINDOW/DOOR FRAMING LINE OPTION 2
RI-RSCRRWVD-120D	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	FLASHING LAYOUT RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 1
RI-RSCRRWVD-120D-1	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	FLASHING LAYOUT RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 2
RI-RSCRRWVD-150A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	METER BOX HEAD FLASHING
RI-RSCRRWVD-160A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	METER BOX SIDE FLASHING
RI-RSCRRWVD-170A	RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX	METER BOX BASE FLASHING


Copyright detail © 2026

Roofing Industries
roof.co.nz


RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX PROFILES & ACCESSORIES

Detail Number: RI-RSCRRWVD-00B
Date drawn: 25/08/2026
Scale: 1 : 5@ A3


ROOFING INDUSTRIES
SLIMCLAD™ REVERSE RUN
PROFILED METAL CLADDING




ROOFING INDUSTRIES
BARGE FLASHING

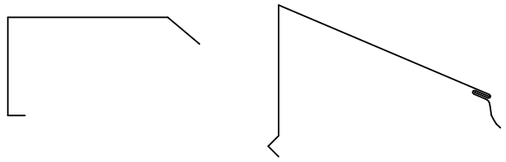


ROOFING INDUSTRIES
BARGE/PARAPET FLASHING



ROOFING INDUSTRIES
CHANGE IN PITCH FLASHING




ROOFING INDUSTRIES
GUTTER APRON FLASHING




ROOFING INDUSTRIES
SLIMCLAD™ REVERSE RUN
PROFILED METAL CLADDING



ROOFING INDUSTRIES
RIDGE FLASHING

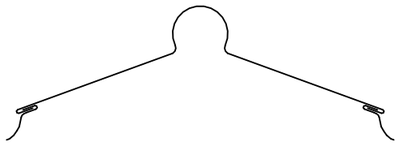

ROOFING INDUSTRIES
APRON FLASHING



ROOFING INDUSTRIES
HEAD FLASHING




ROOFING INDUSTRIES
COVER FLASHING



ROOFING INDUSTRIES
SOFFIT FLASHING



FIXINGS



CAVITY CLOSER




METAL ANGLE




HEAD FLASHING




JAMB FLASHING



ALTERNATE JAMB FALSHING




SILL FLASHING




ROOFING INDUSTRIES
METER BOX BASE
FLASHING




ROOFING INDUSTRIES
JAMB FLASHING




ROOFING INDUSTRIES
CORNER FLASHING



ROOFING INDUSTRIES
INTERNAL CORNER



ROOFING INDUSTRIES
EXTERNAL CORNER



ROOFING INDUSTRIES
VERTICAL BUTT JOINT FLASHING



ROOFING INDUSTRIES
CLADDING BASE FLASHING




Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX PROFILE SUMMARY

Detail Number: RI-RSCRRWVD-00C
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

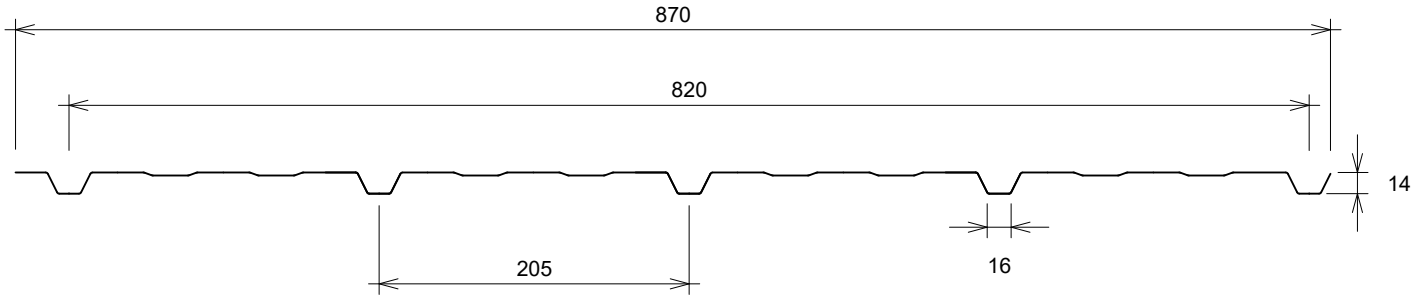

SLIMCLAD™ REVERSE RUN WITH SWAGES
A REDUCED ('LIGHT') SWAGE IS ALSO AVAILABLE

Scale 1:5

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX BARGE

Detail Number: RI-RSCRRWVD-010A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

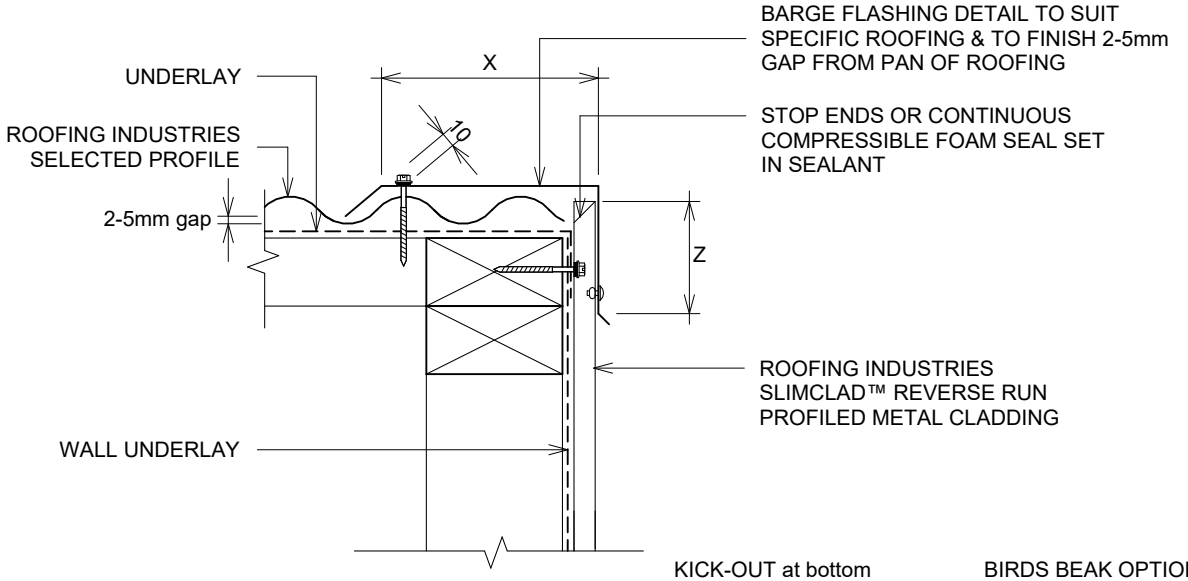


SITE WIND ZONE (As per NZS3604)	MINIMUM	
	Z (2)	X
SITUATION 1	50mm	2 crests
SITUATION 2	70mm	2 crests
SITUATION 3	90mm	2 crests


DETAIL ANNOTATION:

1. SITUATION 1, 2 & 3 AS PER E2/AS1 TABLE 4.5.1.1
2. EXCLUDING DRIP EDGE.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

KICK-OUT at bottom edge of vertical flashing



BIRDS BEAK OPTION at bottom edge of vertical flashing



GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz


RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX HEAD BARGE

Detail Number: RI-RSCRRWVD-020A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

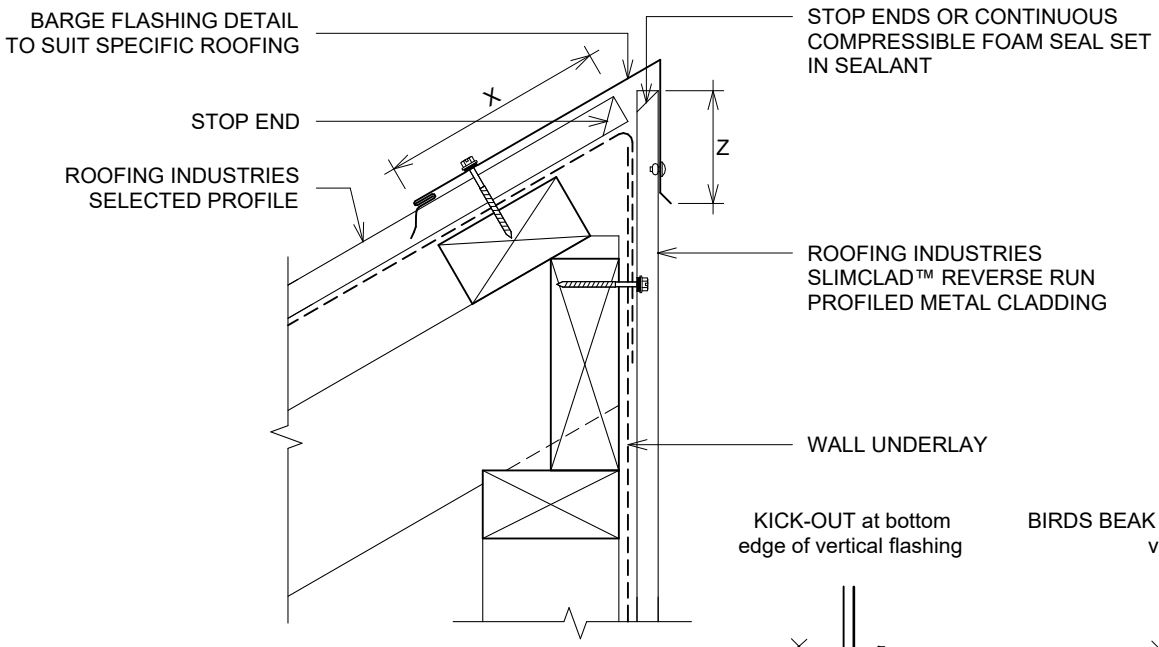


SITE WIND ZONE (As per NZS3604)	MINIMUM	
	Z (2)	X
SITUATION 1	50mm	130mm
SITUATION 2	70mm	200mm
SITUATION 3	90mm	200mm

KICK-OUT at bottom edge of vertical flashing



BIRDS BEAK OPTION at bottom edge of vertical flashing



DETAIL ANNOTATION:

1. SITUATION 1, 2 & 3 AS PER E2/AS1 TABLE 4.5.1.1
2. EXCLUDING DRIP EDGE.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX STANDARD EXTERNAL CORNER OPTION 1

Detail Number: RI-RSCRRWVD-030A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

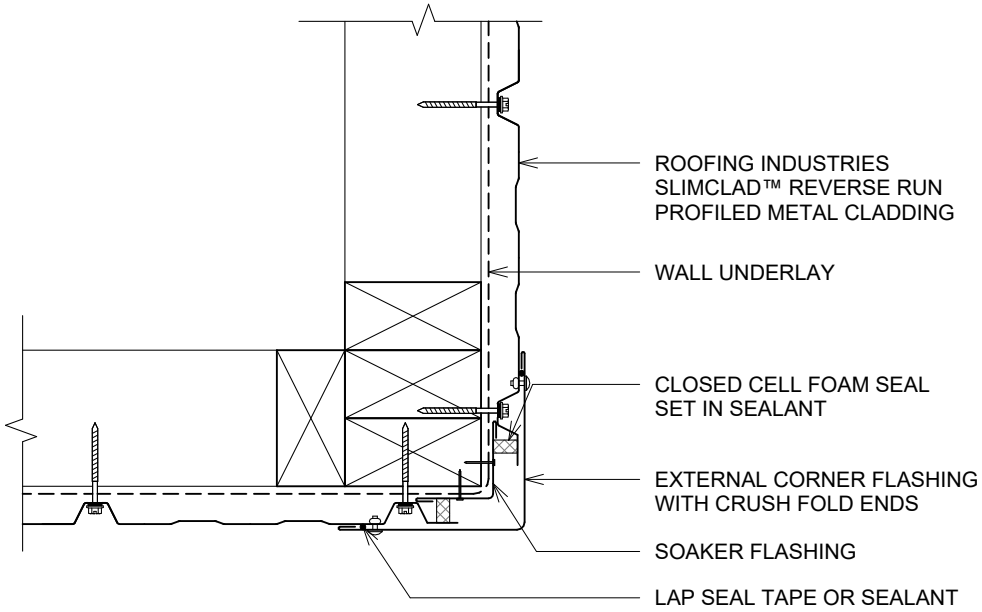

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX STANDARD EXTERNAL CORNER OPTION 2

Detail Number: RI-RSCRRWVD-030B
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

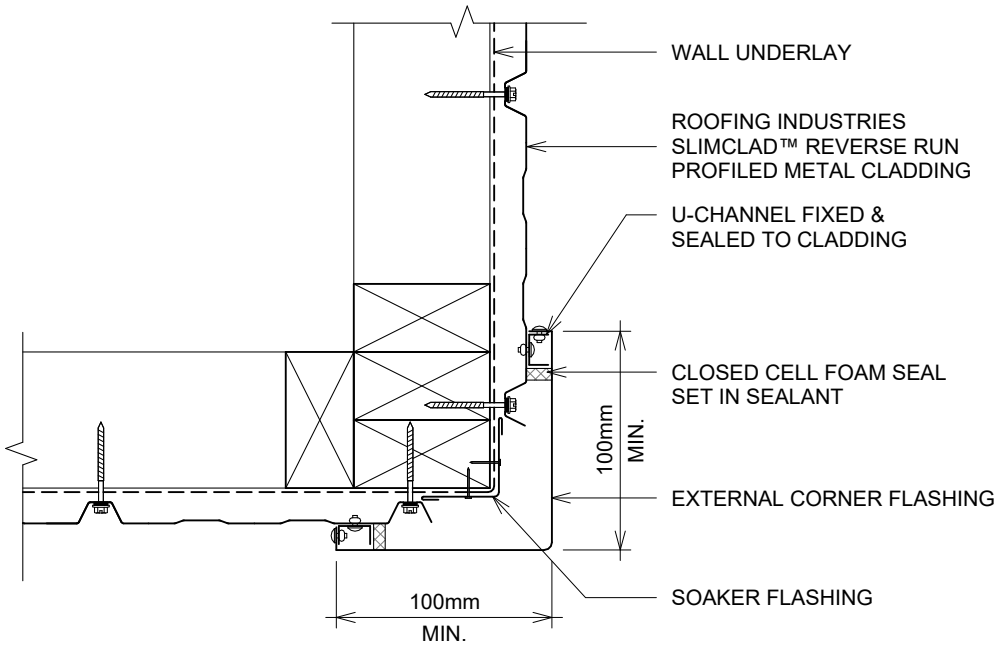

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX EXTERNAL CORNER WITH CLADDING CHANGE OPTION 1

Detail Number: RI-RSCRRWVD-030C
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

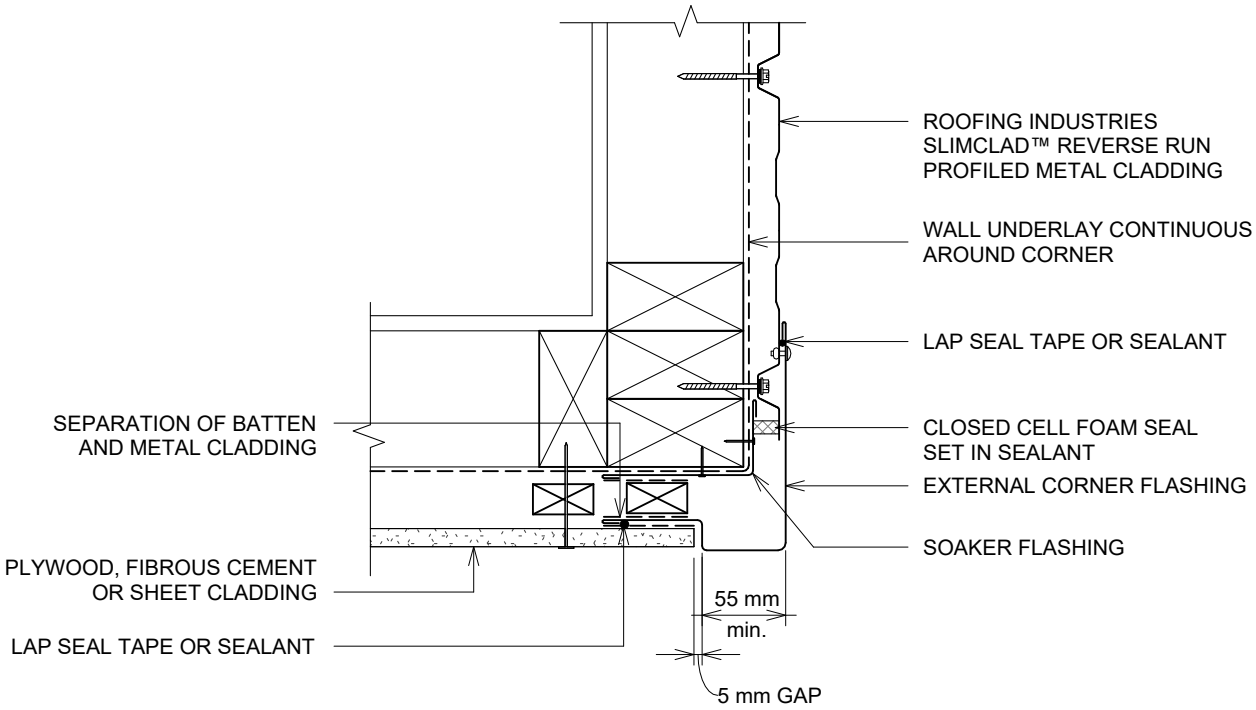

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX EXTERNAL CORNER WITH CLADDING CHANGE OPTION 2

Detail Number: RI-RSCRRWVD-030D
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

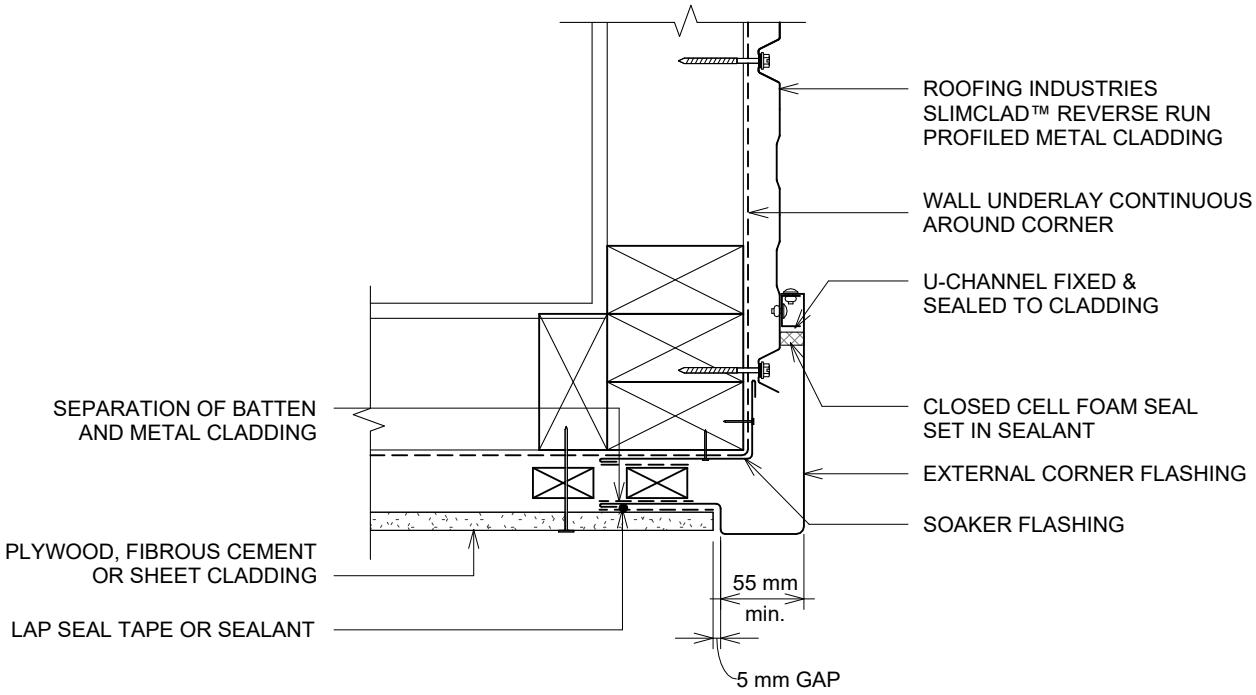

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX STANDARD INTERNAL CORNER OPTION 1

Detail Number: RI-RSCRRWVD-040A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

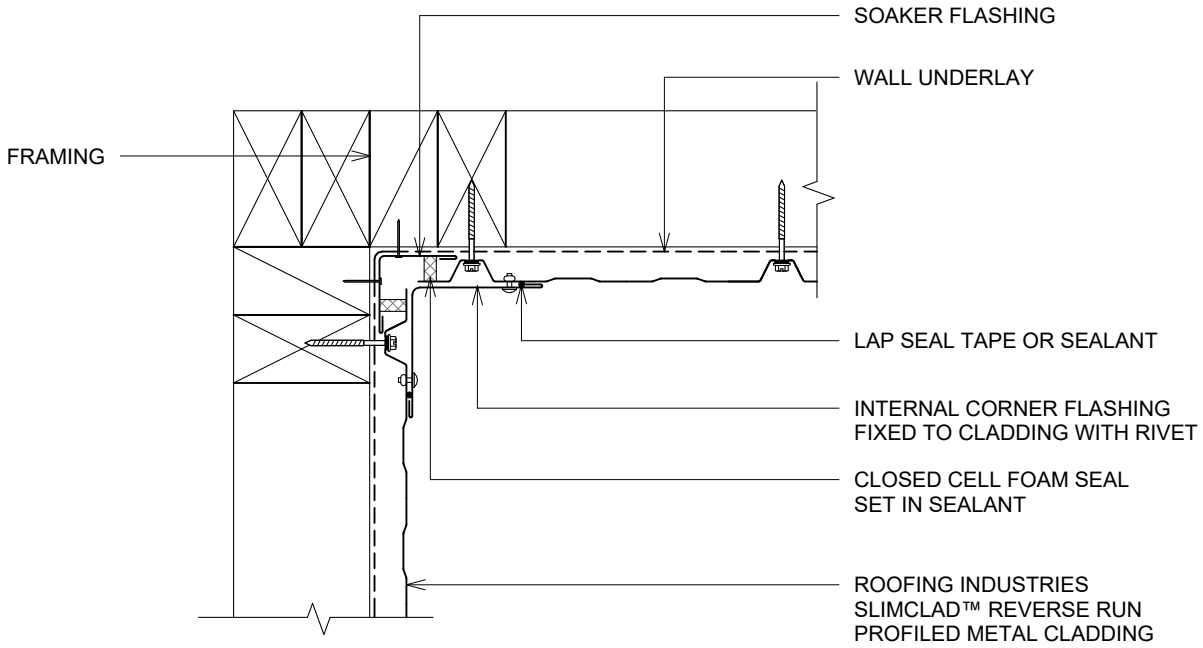

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. A FULL HEIGHT TURN UP CONSTITUTES A CREST.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX STANDARD INTERNAL CORNER OPTION 2

Detail Number: RI-RSCRRWVD-040B
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

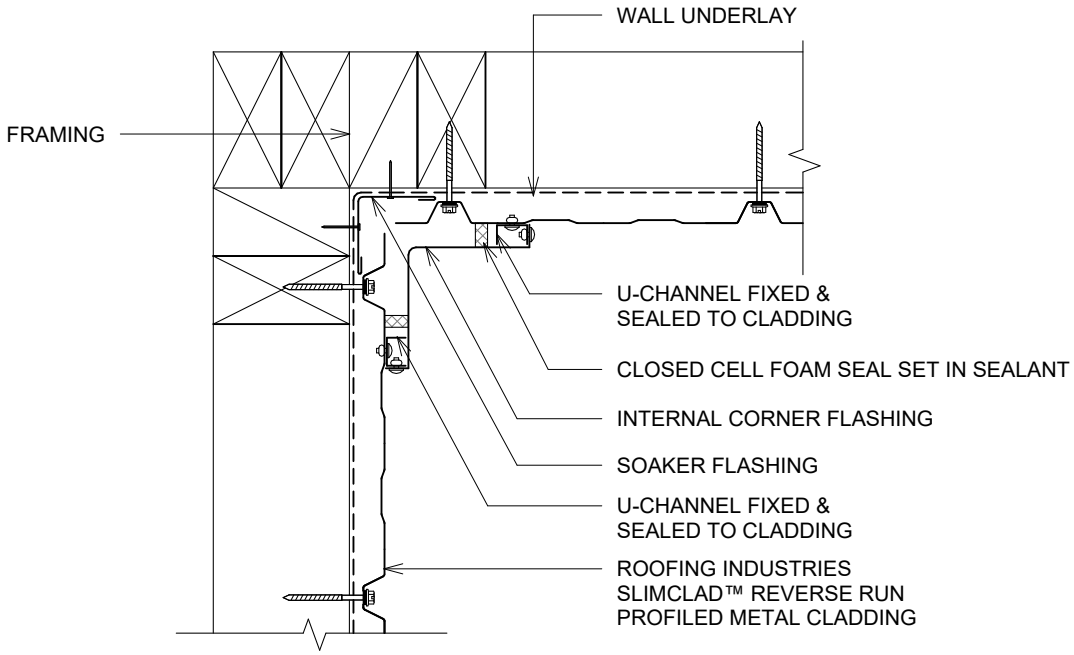

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. A FULL HEIGHT TURN UP CONSTITUTES A CREST.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX INTERNAL CORNER WITH CLADDING CHANGE OPTION 1

Detail Number: RI-RSCRRWVD-040C
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

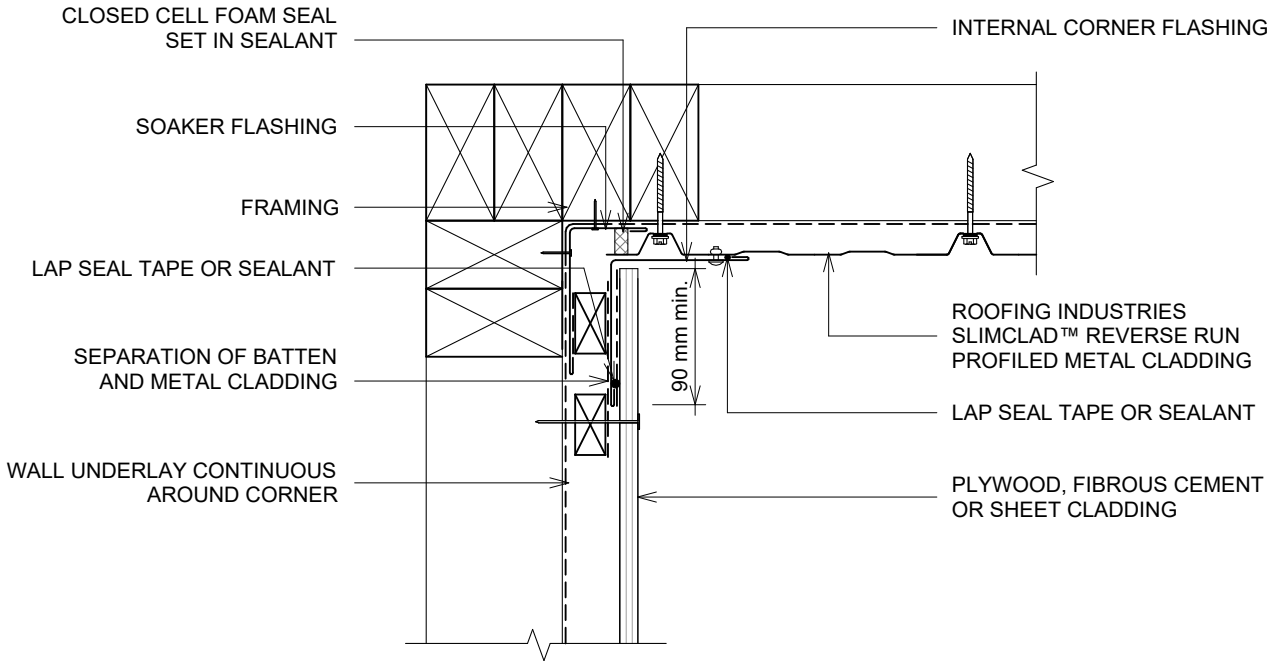

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX INTERNAL CORNER WITH CLADDING CHANGE OPTION 2

Detail Number: RI-RSCRRWVD-040D
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

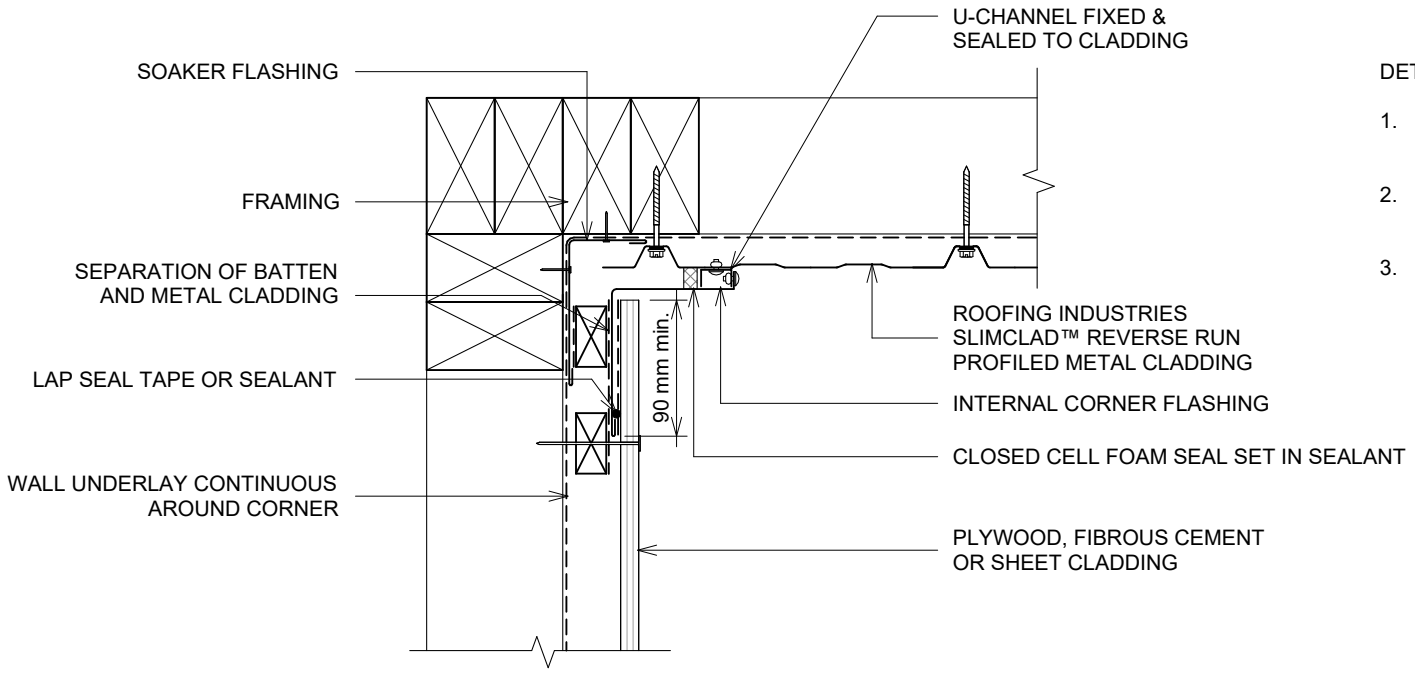

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX BOTTOM OF CLADDING

Detail Number: RI-RSCRRWVD-050
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

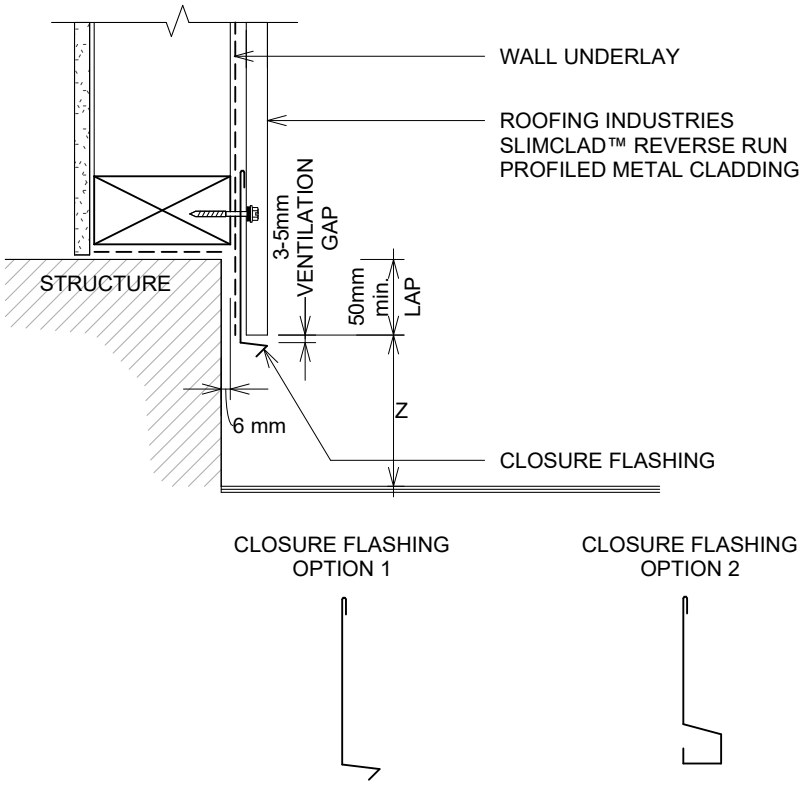

SET DOWN	MINIMUM
	Z
PAVED SURFACE	100mm
UNPAVED SURFACE	175mm

DETAIL ANNOTATION:

1. THE BOTTOM EDGE OF THE CLADDING SHALL OVERLAP THE FOUNDATION WALL
2. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
3. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX SOFFIT FLASHING

Detail Number: RI-RSCRRWVD-060A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

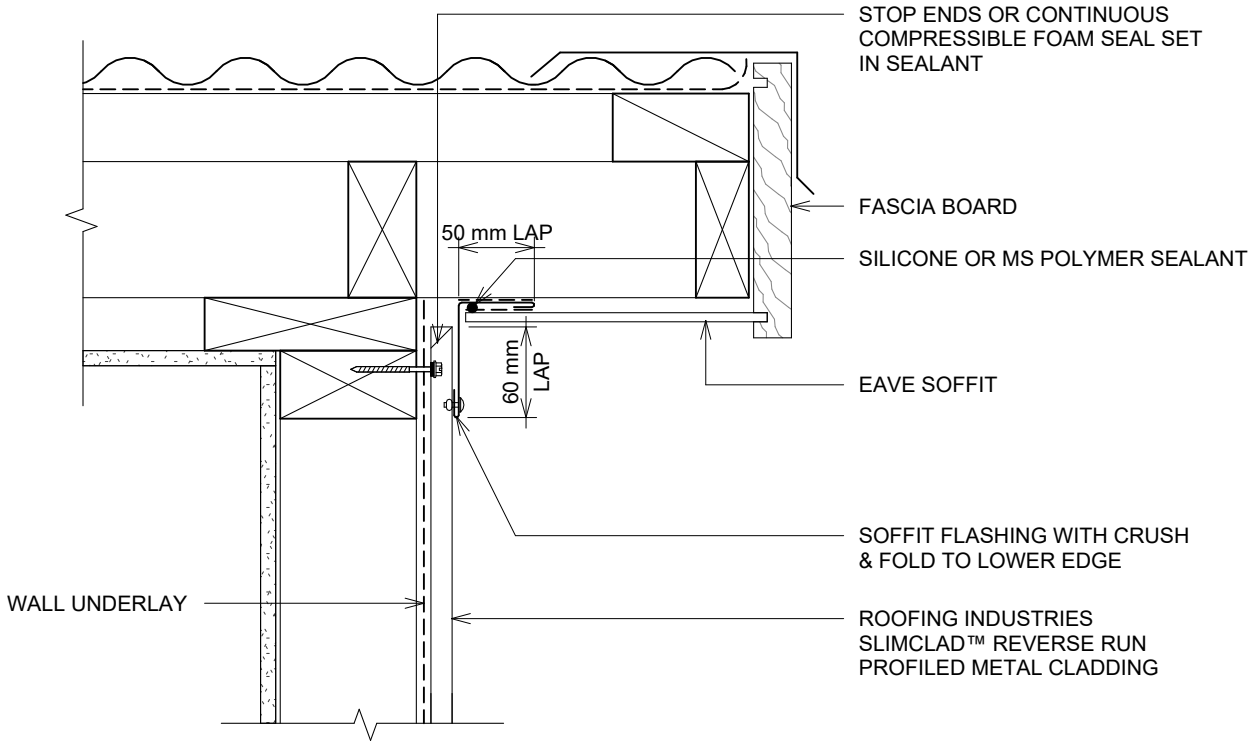

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX SLOPING SOFFIT FLASHING

Detail Number: RI-RSCRRWVD-070A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

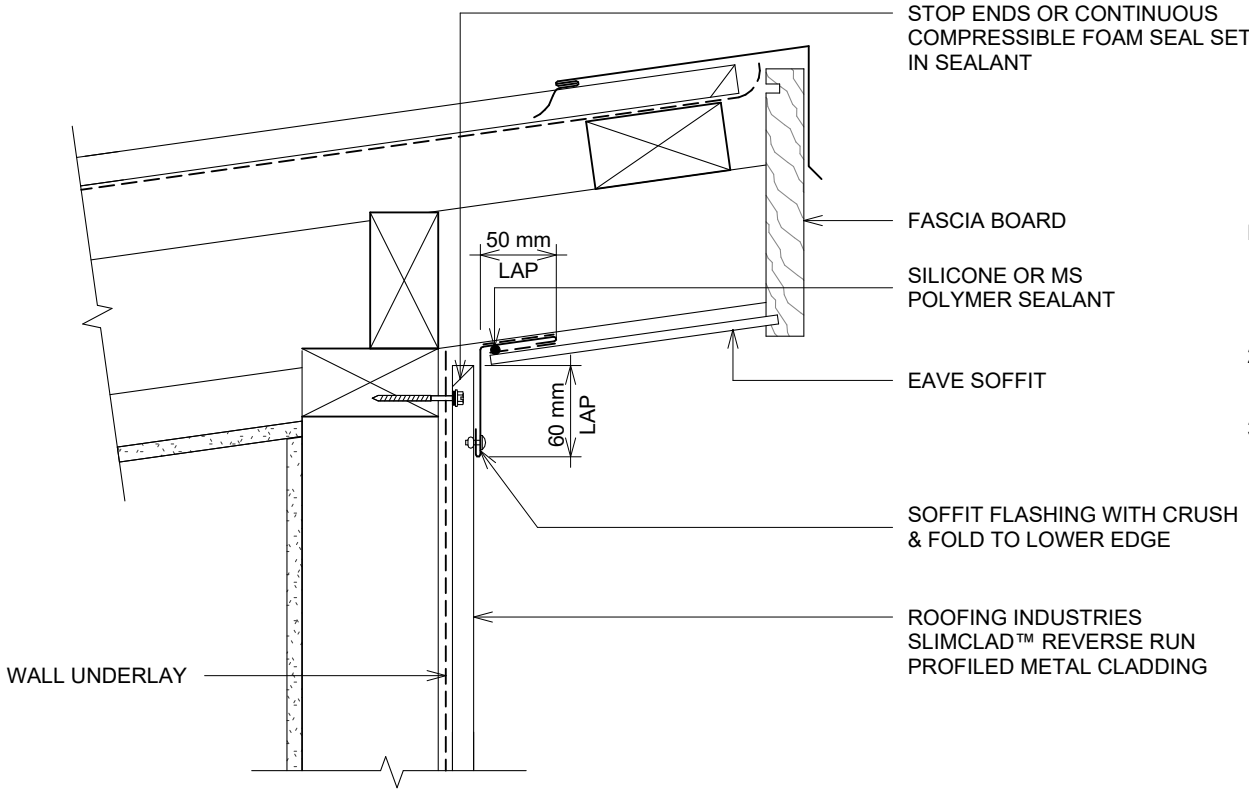

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX VERTICAL BUTT JOINT WITH CLADDING CHANGE OPTION 1

Detail Number: RI-RSCRRWVD-090A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

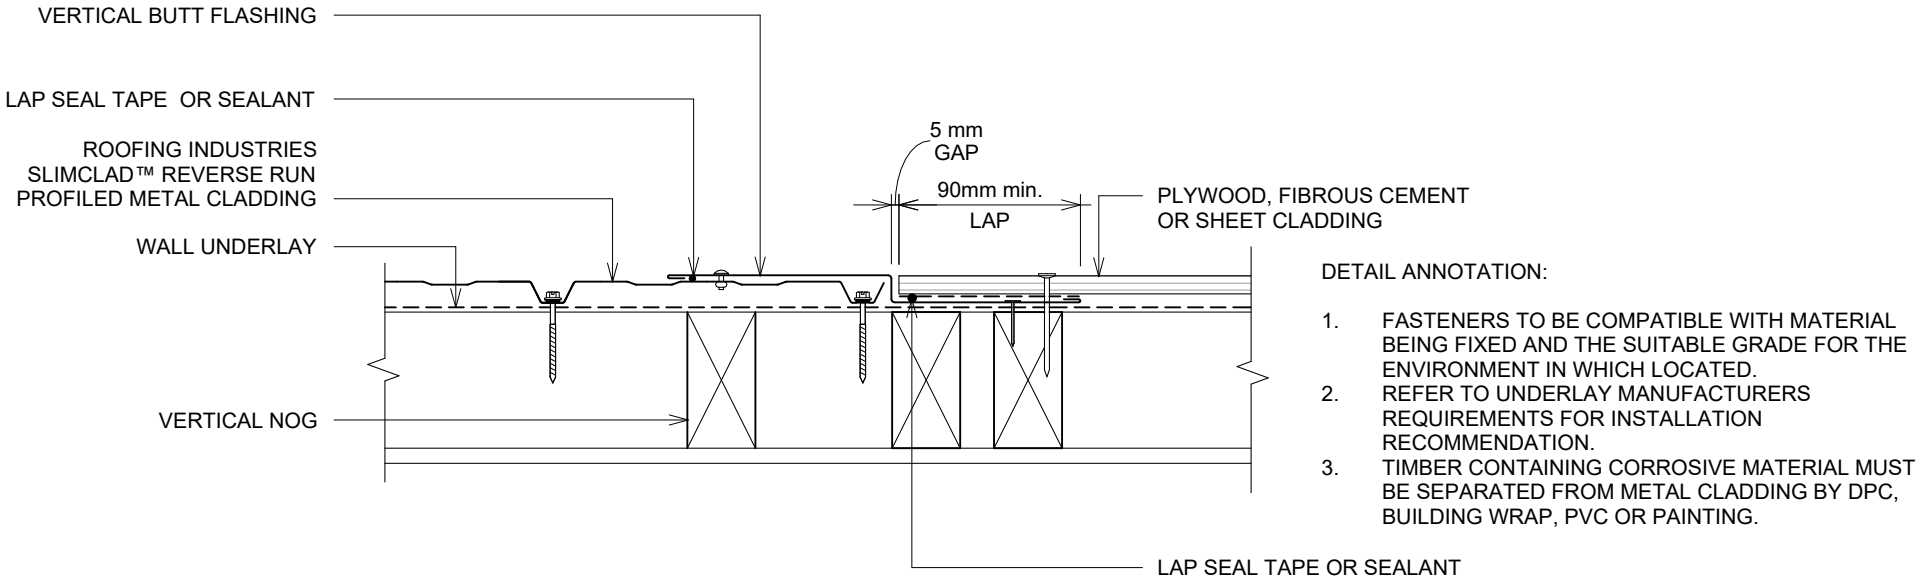

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX VERTICAL BUTT JOINT WITH CLADDING CHANGE OPTION 2

Detail Number: RI-RSCRRWVD-090B
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

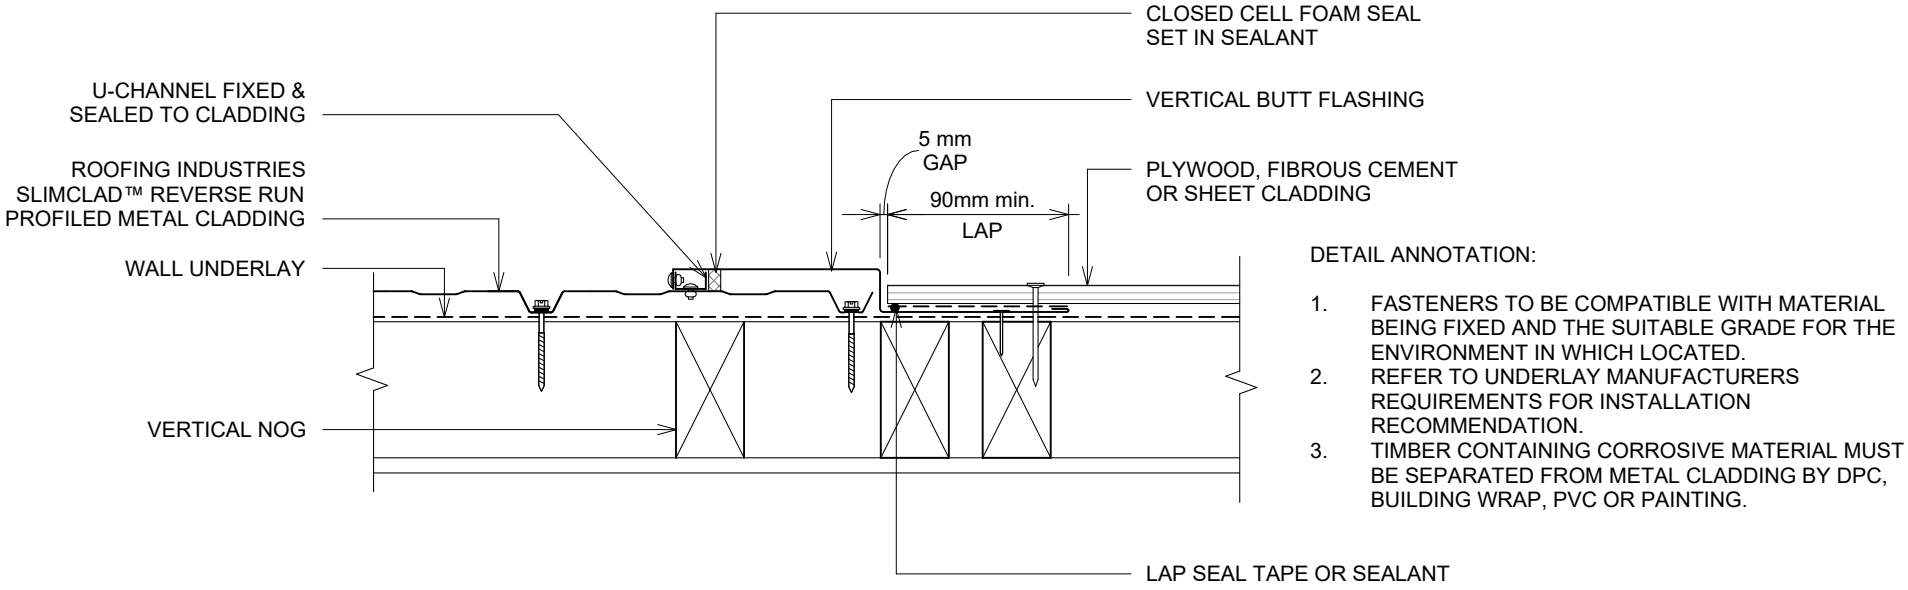

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX VERTICAL BUTT JOINT WITH CLADDING CHANGE OPTION 1

Detail Number: RI-RSCRRWVD-090C
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

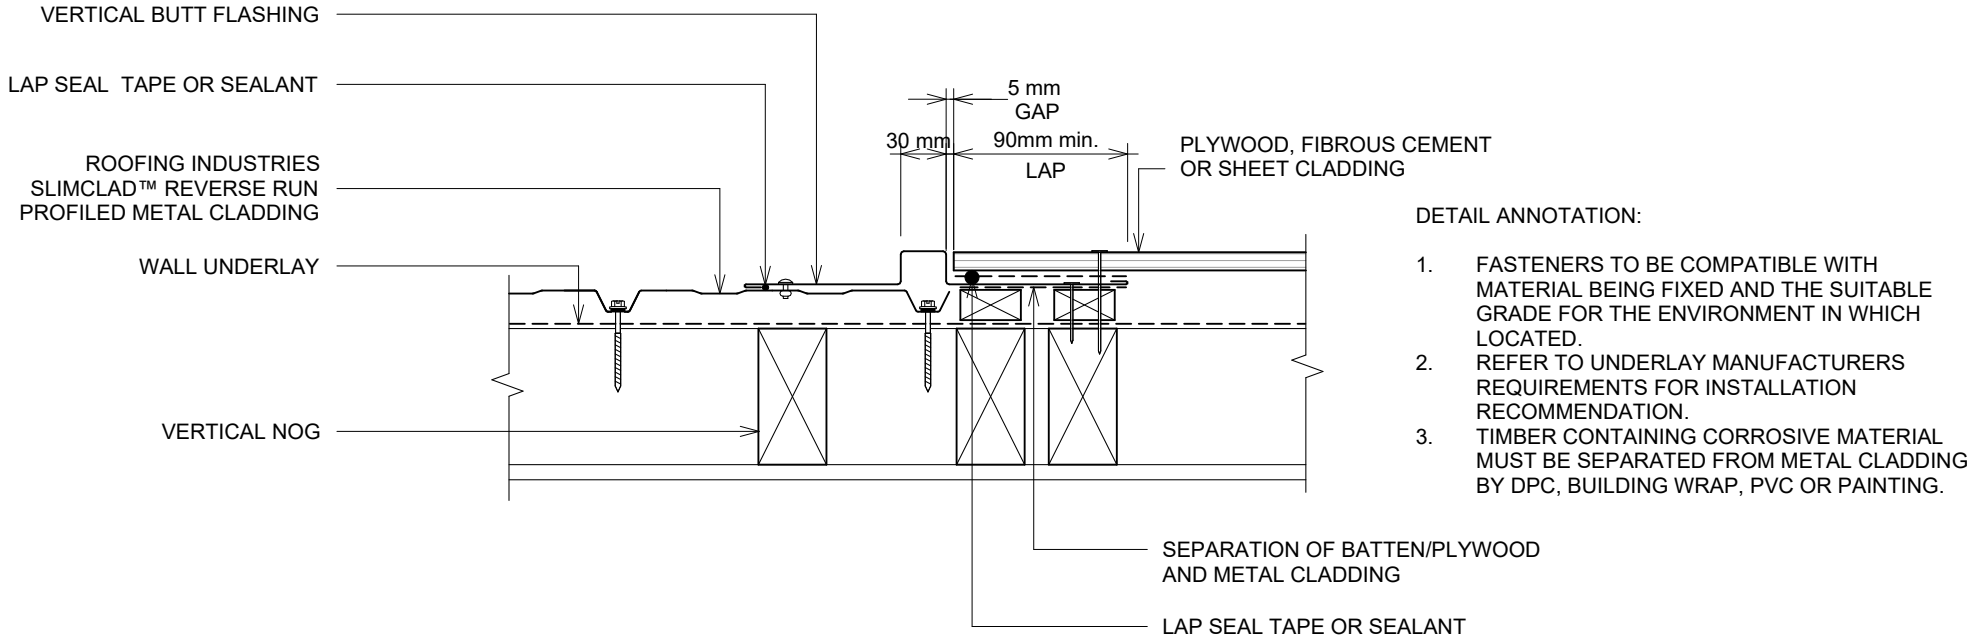

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX VERTICAL BUTT JOINT WITH CLADDING CHANGE OPTION 2

Detail Number: RI-RSCRRWVD-090D
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

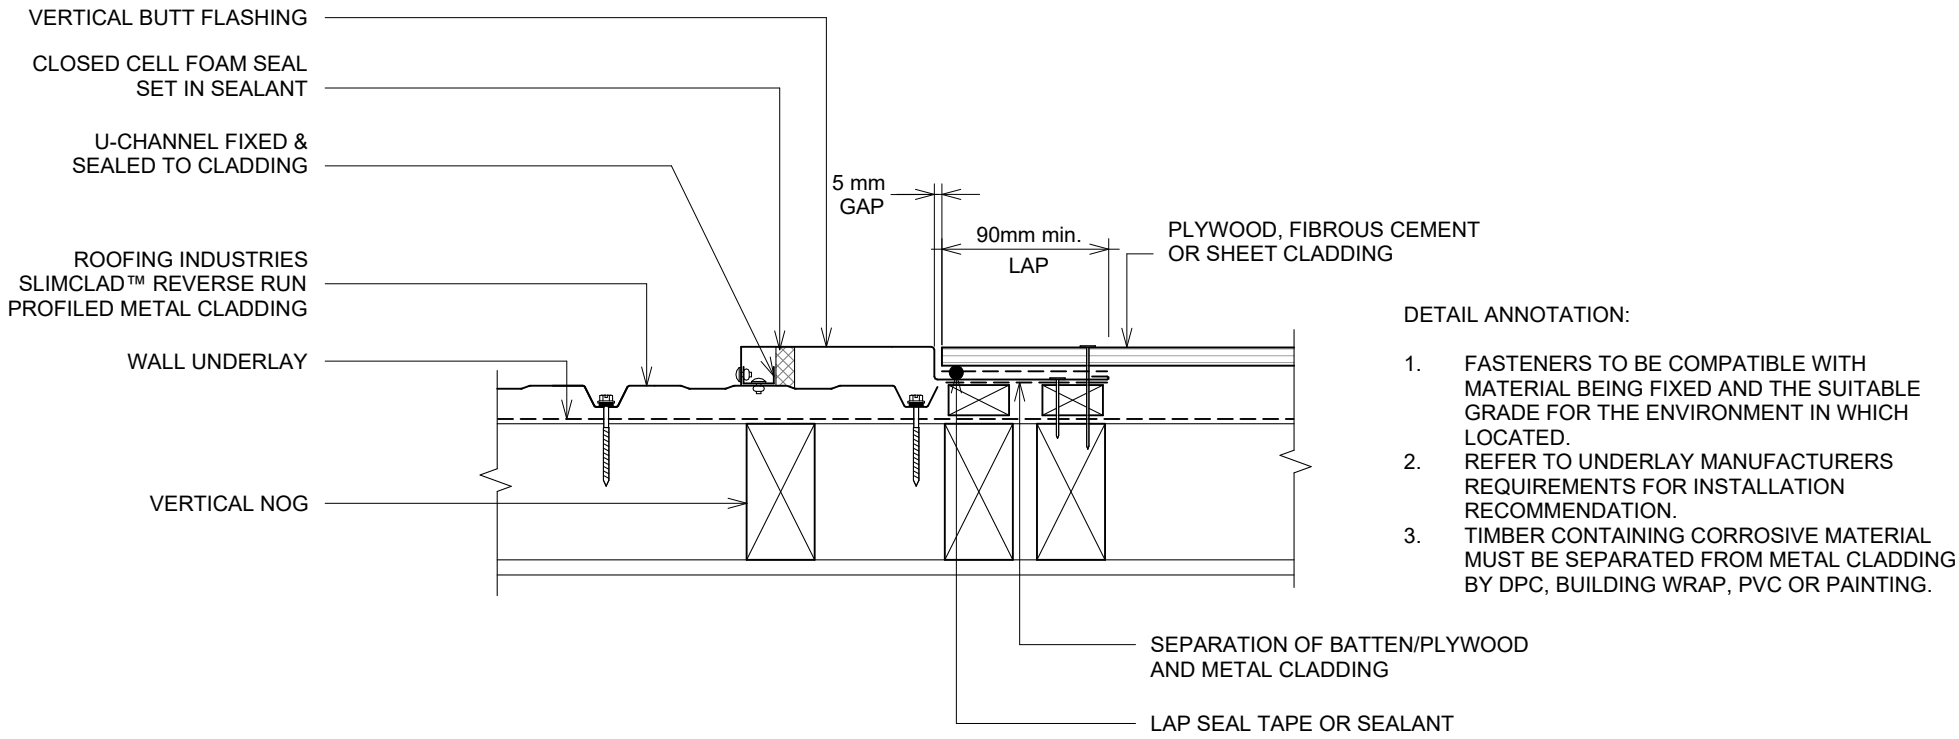

DETAIL ANNOTATION:

1. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
2. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.
3. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026


Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX JUNCTION FLASHING


Detail Number: RI-RSCRRWVD-100
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

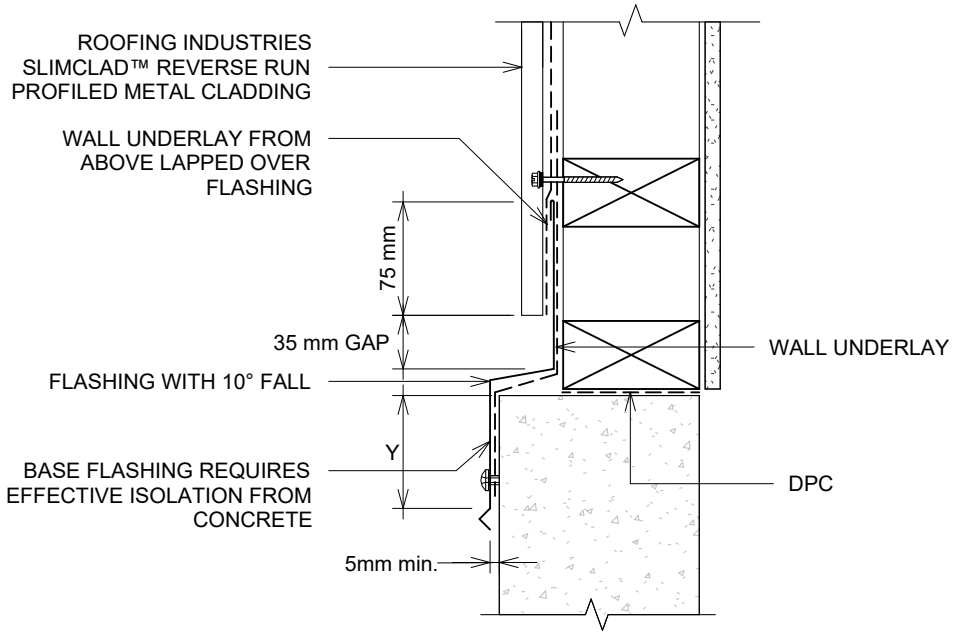

KICK-OUT OPTION at bottom edge of vertical flashing



BIRDS BEAK at bottom edge of vertical flashing



DETAIL ANNOTATION:

1. SITUATION 1, 2 & 3 AS PER E2/AS1 TABLE 4.5.1.1
2. EXCLUDES DRIP EDGE.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026


Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX BALUSTRADE


Detail Number: RI-RSCRRWVD-110A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

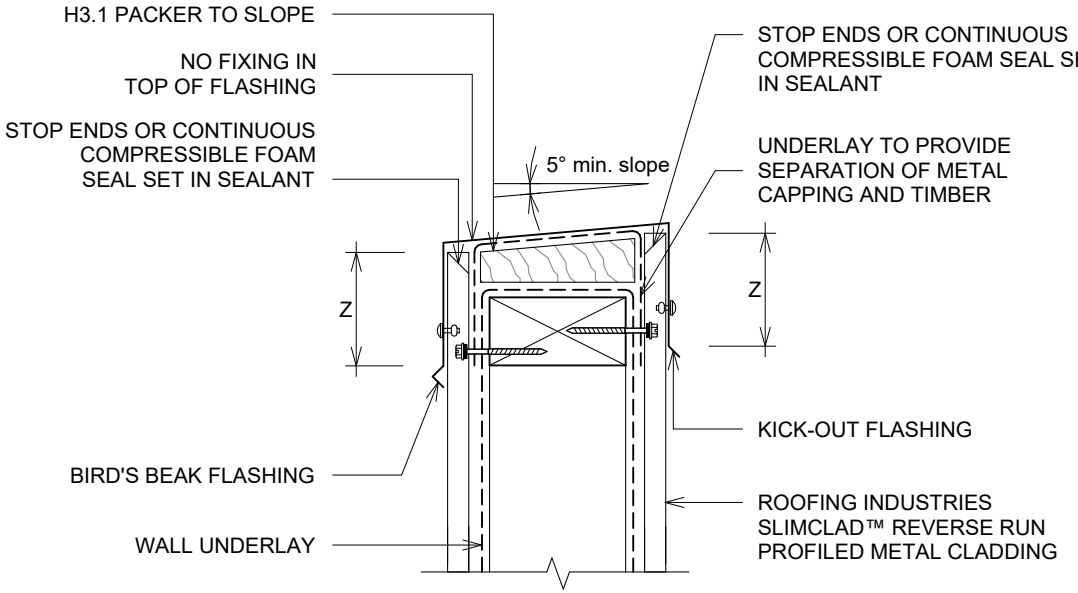

KICK-OUT at bottom edge of vertical flashing



BIRDS BEAK at bottom edge of vertical flashing



SITE WIND ZONE (As per NZS3604)	MINIMUM Z (2)
SITUATION 1	50mm
SITUATION 2	70mm
SITUATION 3	90mm

DETAIL ANNOTATION:

1. SITUATION 1, 2 & 3 AS PER E2/AS1 TABLE 4.5.1.1
2. EXCLUDES DRIP EDGE.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX HEAD FLASHING RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 1


Detail Number: RI-RSCRRWVD-120A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

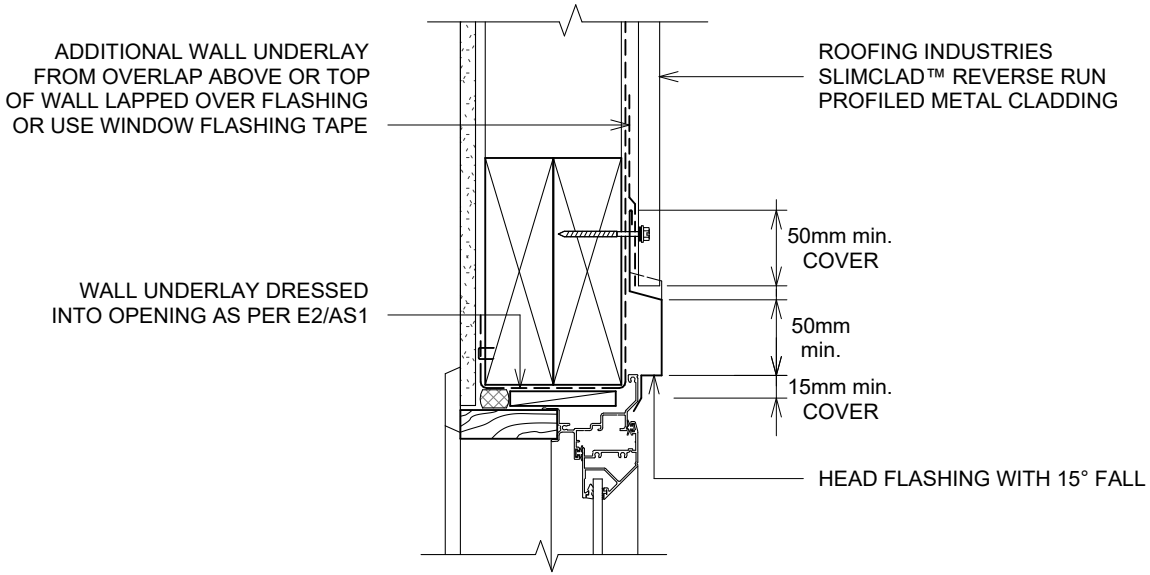

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
4. LIASE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
5. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
6. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

HEAD FLASHING



Turn down end of head flashing to jamb flashing

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX HEAD FLASHING RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 2


Detail Number: RI-RSCRRWVD-120A-1
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

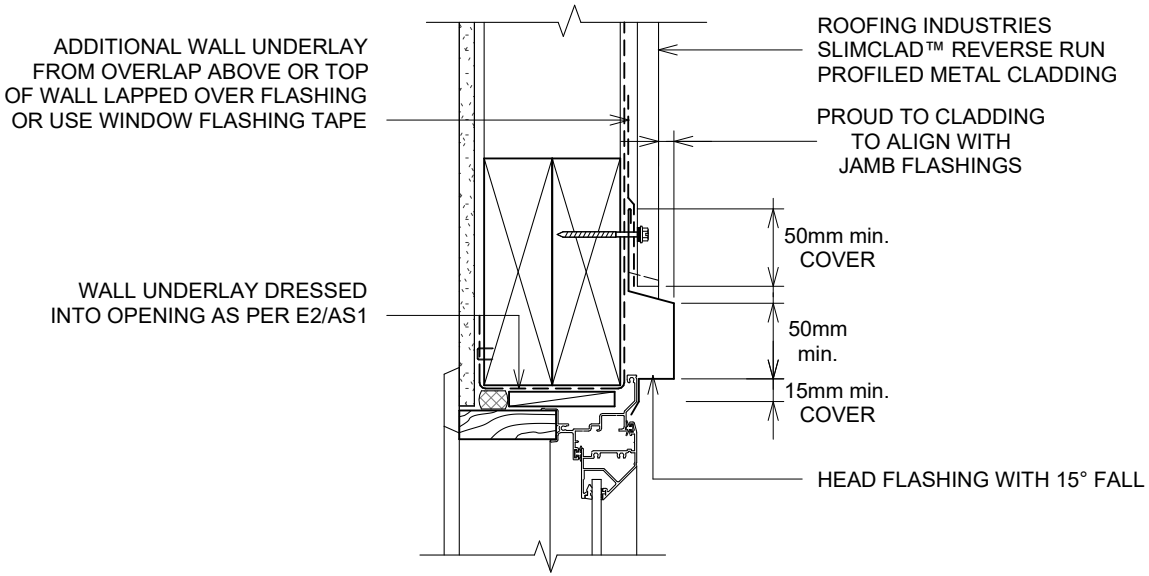

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
4. LIASE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
5. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
6. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

HEAD FLASHING



Turn down end of head flashing to jamb flashing

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX JAMB FLASHING RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 1


Detail Number: RI-RSCRRWVD-120B
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

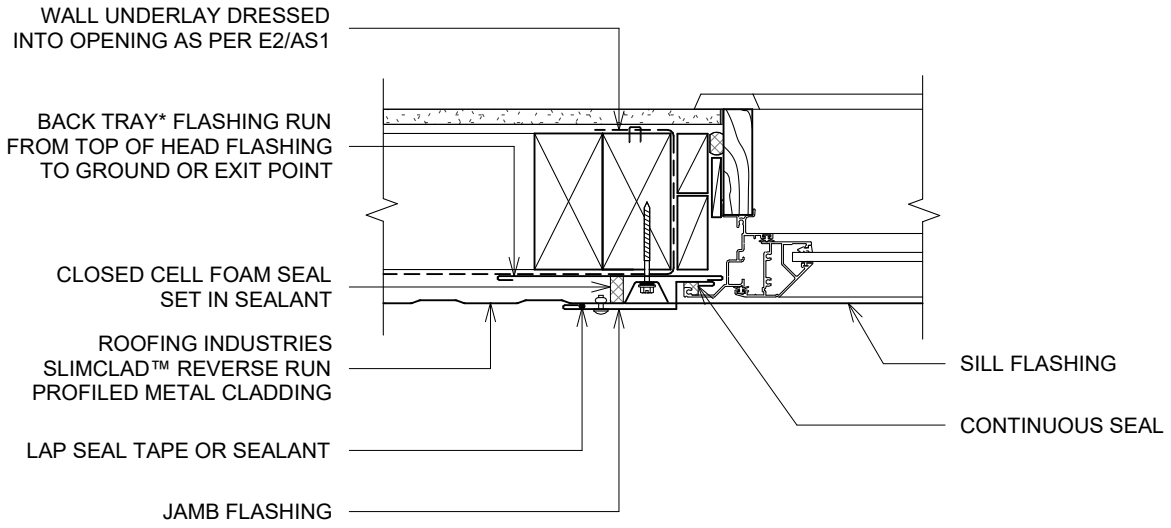

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. LIASE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
4. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
5. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
6. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

JAMB FLASHING



* Back tray size may require to increase to ensure coverage at ends of head flashiing.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX JAMB FLASHING RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 2


Detail Number: RI-RSCRRWVD-120B-1
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

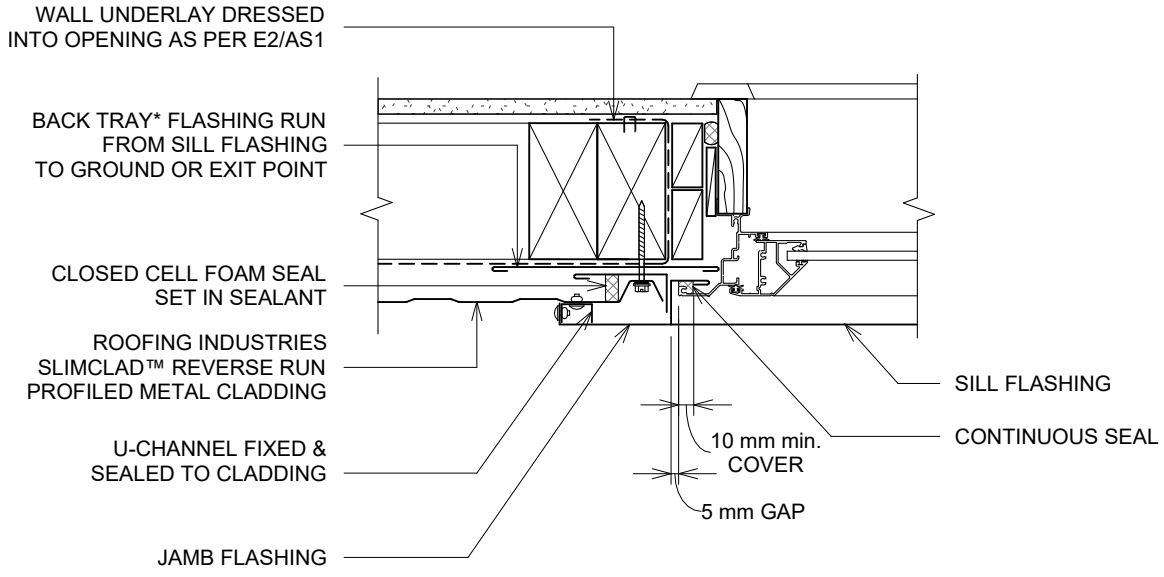

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. LIASE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
4. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
5. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
6. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

JAMB FLASHING



* Back tray size may require to increase to ensure coverage at ends of head flashiing.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX SILL FLASHING RECESSED WINDOW/DOOR FRAMING LINE OPTION 1


Detail Number: RI-RSCRRWVD-120C
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

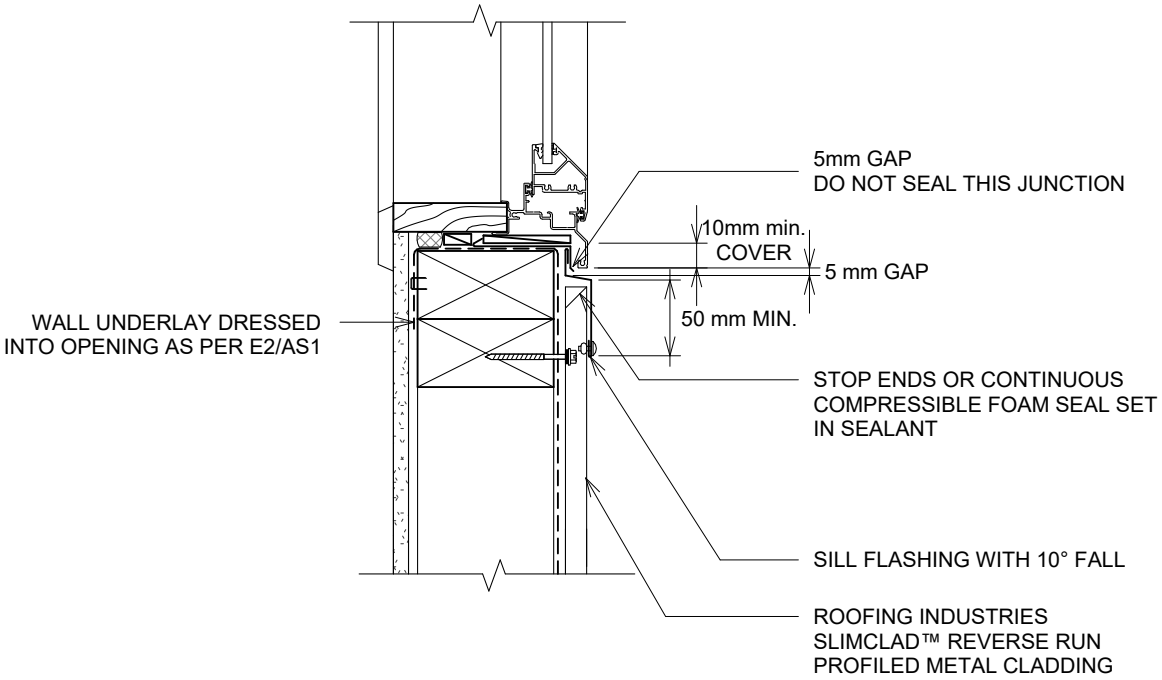

DETAIL ANNOTATION:

1. REFER TO E2/AS1FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
4. LIASE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
5. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
6. REER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

SILL FLASHING



Sill flashings stop ended to receive jamb flashings.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX SILL FLASHING RECESSED WINDOW/DOOR FRAMING LINE OPTION 2


Detail Number: RI-RSCRRWVD-120C-1
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

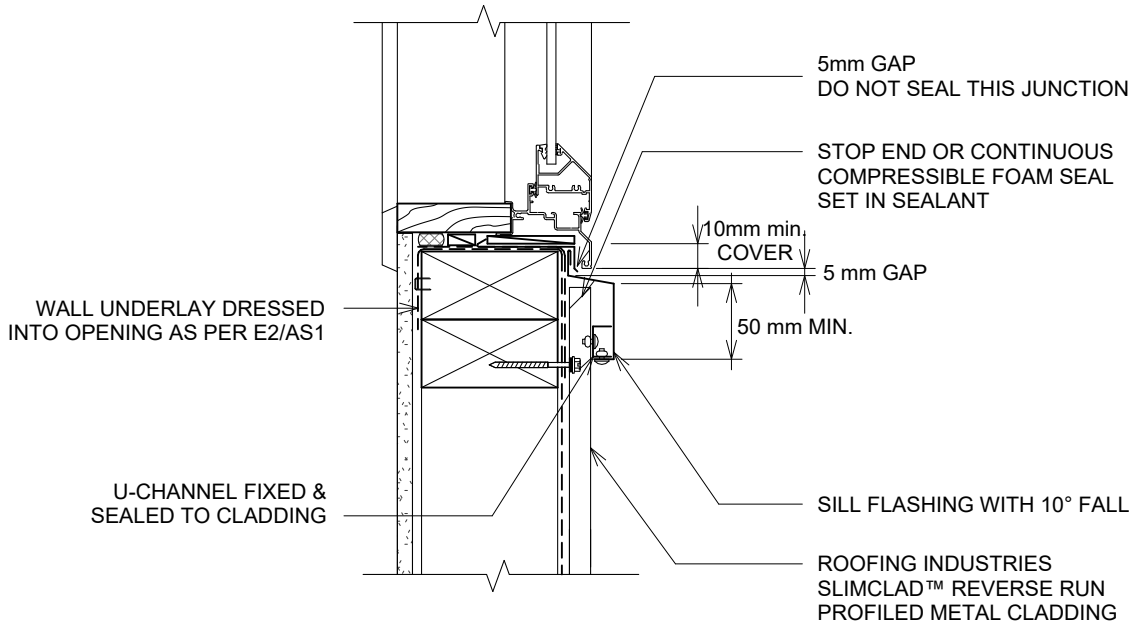

DETAIL ANNOTATION:

1. REFER TO E2/AS1FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
4. LIASE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
5. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
6. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

SILL FLASHING



Sill flashings stop ended to receive jamb flashings.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX FLASHING LAYOUT RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 1

Detail Number: RI-RSCRRWVD-120D
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

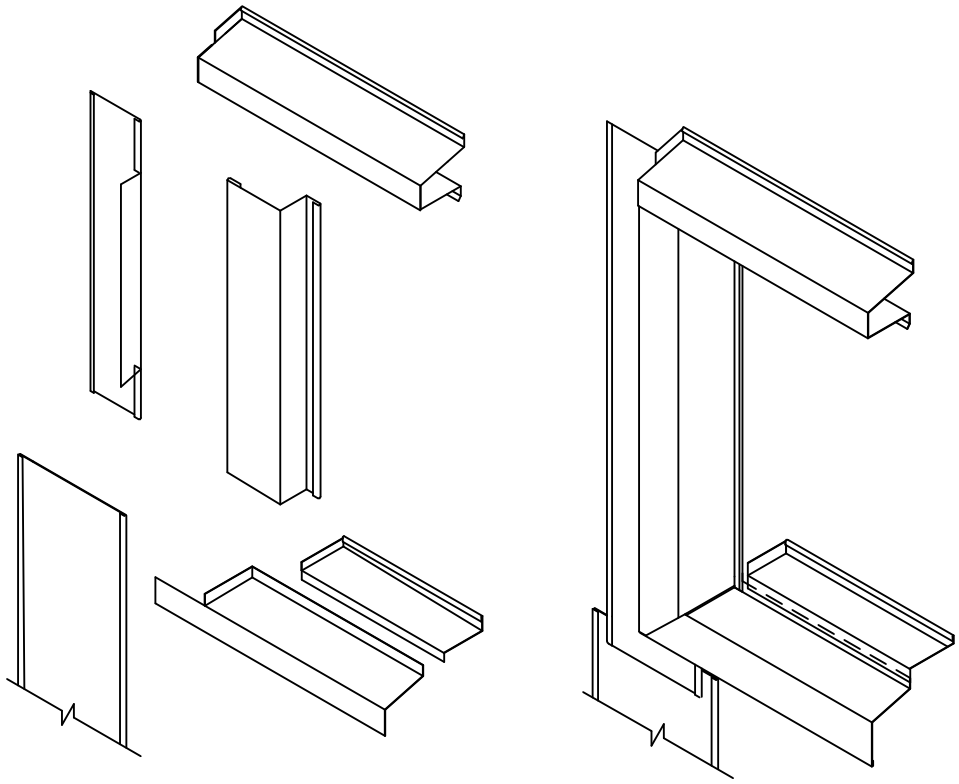

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX FLASHING LAYOUT RECESSED WINDOW/DOOR ON FRAMING LINE OPTION 2

Detail Number: RI-RSCRRWVD-120D-1
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

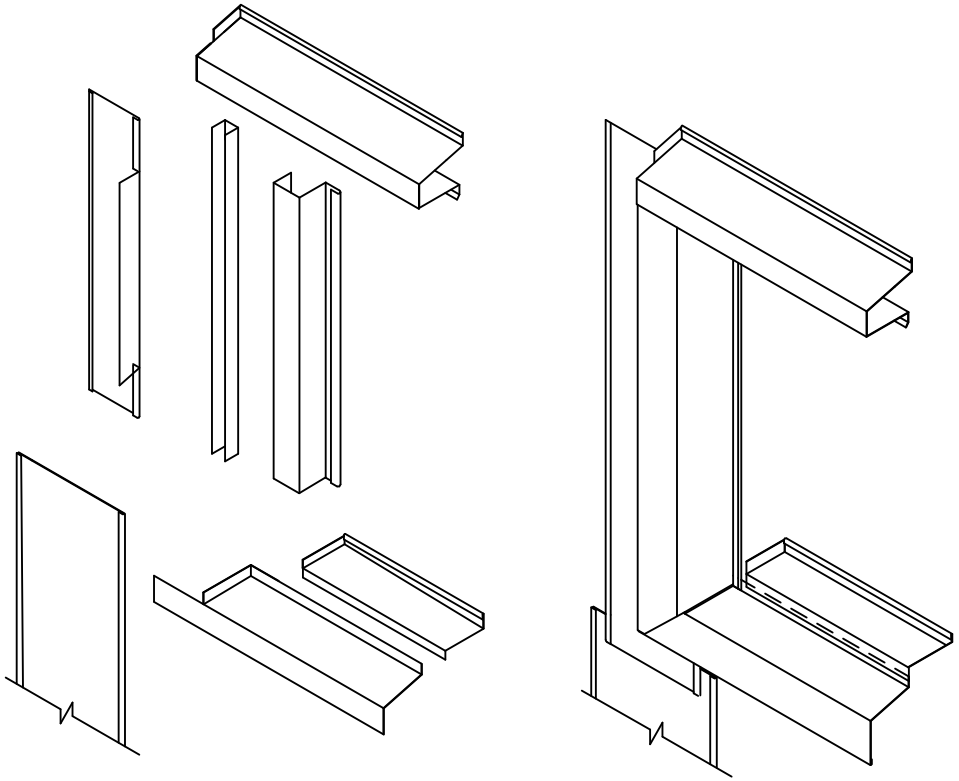

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX METER BOX HEAD FLASHING

Detail Number: RI-RSCRRWVD-150A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

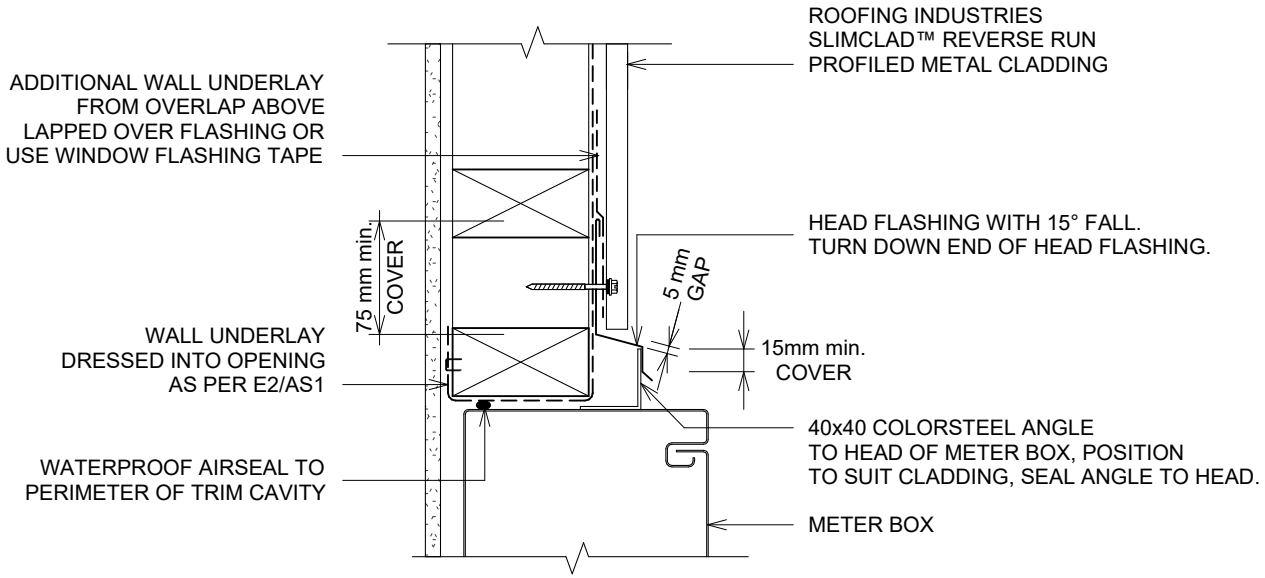

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL METER BOX AND SIMILAR PENETRATIONS / OPENINGS.
2. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
3. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

METER BOX HEAD FLASHING



GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX METER BOX SIDE FLASHING


Detail Number: RI-RSCRRWVD-160A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

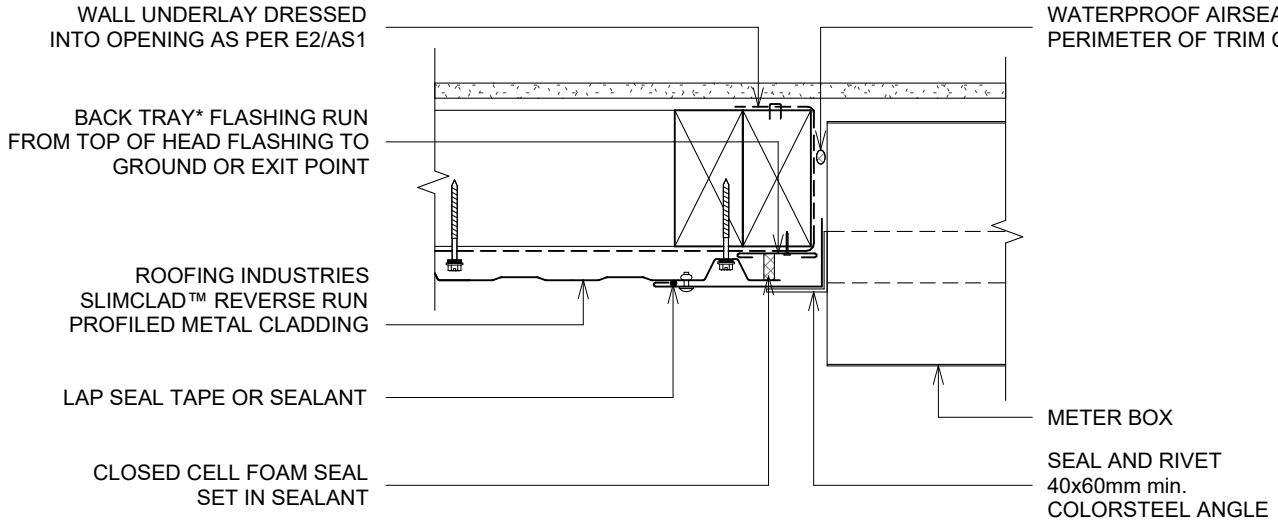

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL METER BOX AND SIMILAR PENETRATIONS / OPENINGS
2. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
3. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

METER BOX SIDE FLASHING



* Back tray size may require to increase to ensure coverage at ends of head flashing.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries roof.co.nz

RESIDENTIAL SLIMCLAD™ REVERSE RUN VERTICAL CLADDING DIRECT FIX METER BOX BASE FLASHING

Detail Number: RI-RSCRRWVD-170A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

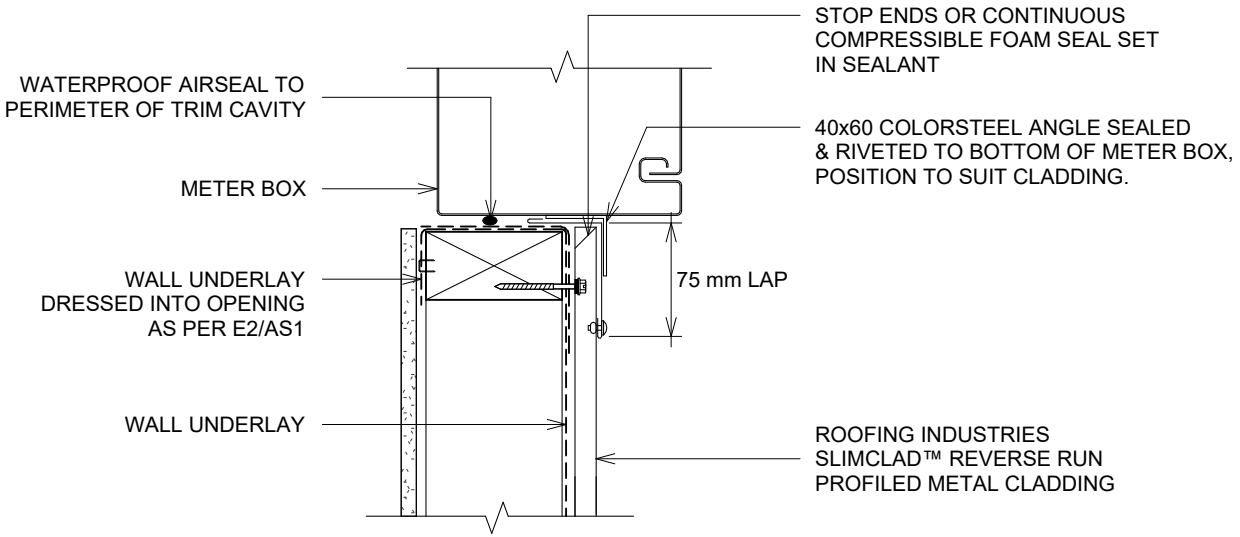

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL METER BOX AND SIMILAR PENETRATIONS / OPENINGS.
2. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED
3. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATION.

METER BOX BASE FLASHING



GENERAL NOTES:

- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz