COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
SHEET LIST

Detail Number: RI-CSCWVDM-00A
Date drawn: 25/08/2026
Scale: @ A3

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING		
Sheet Number	Type	Sheet Name
RI-CSCWVDM-00A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	SHEET LIST
RI-CSCWVDM-00B	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	PROFILES & ACCESSORIES
RI-CSCWVDM-00C	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	PROFILE SUMMARY
RI-CSCWVDM-010A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	EXTERNAL CORNER
RI-CSCWVDM-020A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	INTERNAL CORNER
RI-CSCWVDM-030A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	OVER PRECAST PANEL
RI-CSCWVDM-040A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	FLOOR JUNCTION
RI-CSCWVDM-050A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	TILT PANEL JUNCTION
RI-CSCWVDM-060A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	TILT PANEL JUNCTION
RI-CSCWVDM-070A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	VERTICAL BUTT FLASHING (CLADDING CHANGE)
RI-CSCWVDM-120A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	WINDOW/DOOR HEAD FLASHING
RI-CSCWVDM-120B	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	WINDOW/DOOR JAMB FLASHING OPTION 1
RI-CSCWVDM-120B-1	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	WINDOW/DOOR JAMB FLASHING OPTION 2
RI-CSCWVDM-120C	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	WINDOW/DOOR SILL FLASHING
RI-CSCWVDM-120D	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	WINDOW/DOOR FLASHING LAYOUT OPTION 1
RI-CSCWVDM-120D-1	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	WINDOW/DOOR FLASHING LAYOUT OPTION 2
RI-CSCWVDM-190A	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	ROLLER DOOR HEAD
RI-CSCWVDM-190B	COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING	ROLLER DOOR JAMB


Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING PROFILES & ACCESSORIES

Detail Number: RI-CSCWVDM-00B
Date drawn: 25/08/2026
Scale: 1 : 5@ A3


ROOFING INDUSTRIES
SLIMCLAD™
PROFILED METAL CLADDING




ROOFING INDUSTRIES
BARGE FLASHING




ROOFING INDUSTRIES
BARGE/PARAPET
CAPPING

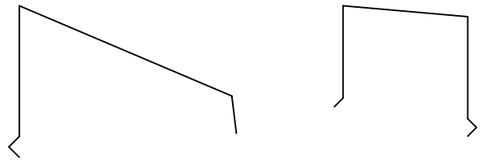

ROOFING INDUSTRIES
CHANGE IN PITCH
FLASHING




ROOFING INDUSTRIES
GUTTER APRON
FLASHING




ROOFING INDUSTRIES
SLIMCLAD™
PROFILED METAL CLADDING



ROOFING INDUSTRIES
RIDGE FLASHING

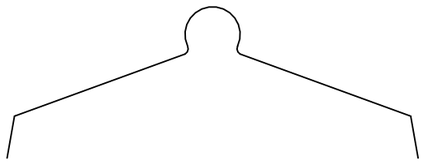

ROOFING INDUSTRIES
APRON FLASHING



HEAD FLASHING




ROOFING INDUSTRIES
COVER FLASHING



ROOFING INDUSTRIES
SOFFIT FLASHING



FIXINGS



CAVITY CLOSER




METAL ANGLE




HEAD FLASHING




JAMB FLASHING



ALTERNATE JAMB FALSHING




SILL FLASHING




ROOFING INDUSTRIES
METER BOX BASE
FLASHING




ROOFING INDUSTRIES
JAMB FLASHING




ROOFING INDUSTRIES
CORNER FLASHING



ROOFING INDUSTRIES
INTERNAL CORNER



ROOFING INDUSTRIES
EXTERNAL CORNER



ROOFING INDUSTRIES
VERTICAL BUTT JOINT FLASHING



ROOFING INDUSTRIES
CLADDING BASE FLASHING




Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
PROFILE SUMMARY

Detail Number: RI-CSCWVDM-00C
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

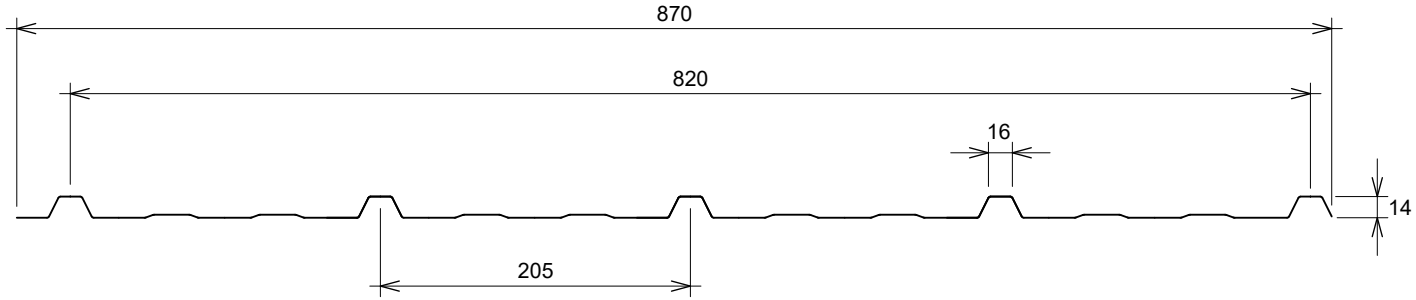

SLIMCLAD™ WITH SWAGES
A REDUCED ('LIGHT') SWAGE IS ALSO AVAILABLE

Scale 1:5

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING EXTERNAL CORNER

Detail Number: RI-CSCWVDM-010A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

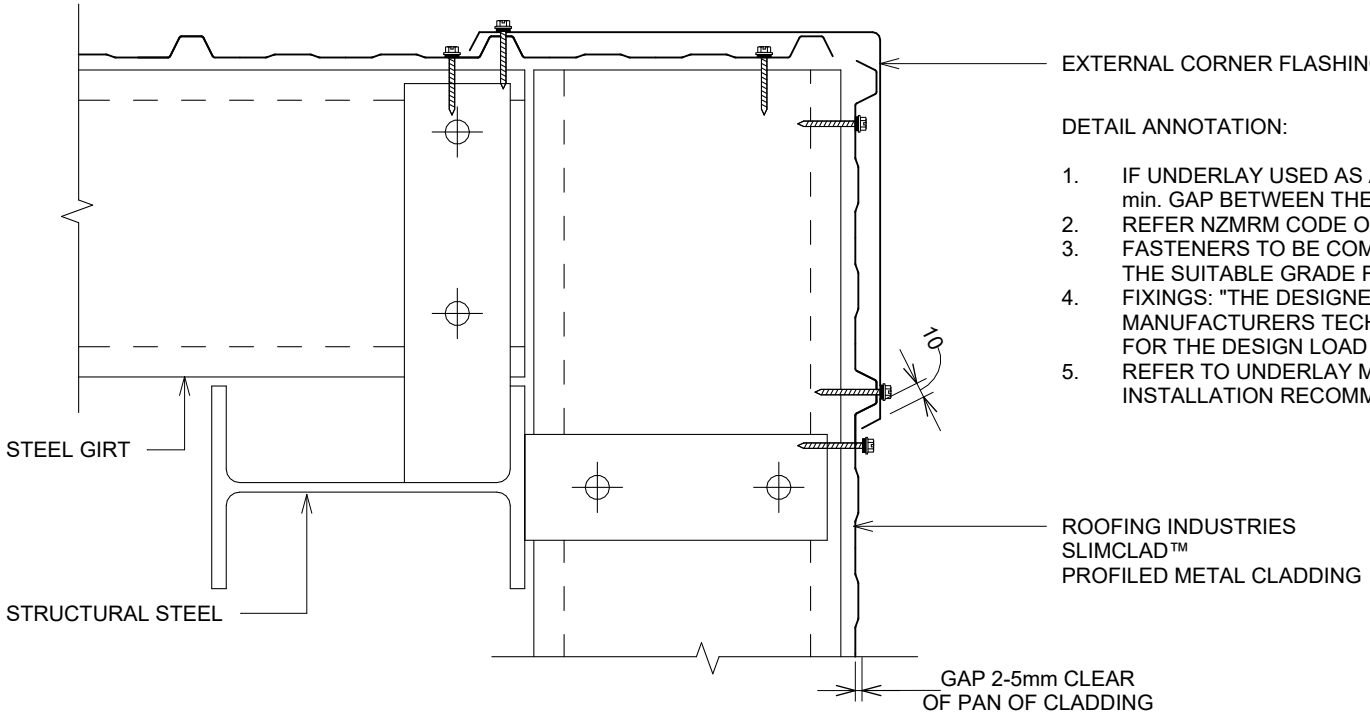

DETAIL ANNOTATION:

1. IF UNDERLAY USED AS A VAPOUR BARRIER IT MAY REQUIRE A 20MM min. GAP BETWEEN THE UNDERSIDE OF THE ROOFING & UNDERLAY.
2. REFER NZMRM CODE OF PRACTICE FOR FLASHING COVER.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FIXINGS: "THE DESIGNER NEEDS TO CHECK THE SCREW MANUFACTURERS TECHNICAL DATA OF THE SELECTED SCREW TYPE FOR THE DESIGN LOAD AND THE MATERIAL BEING FASTENED TO."
5. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING INTERNAL CORNER

Detail Number: RI-CSCWVDM-020A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

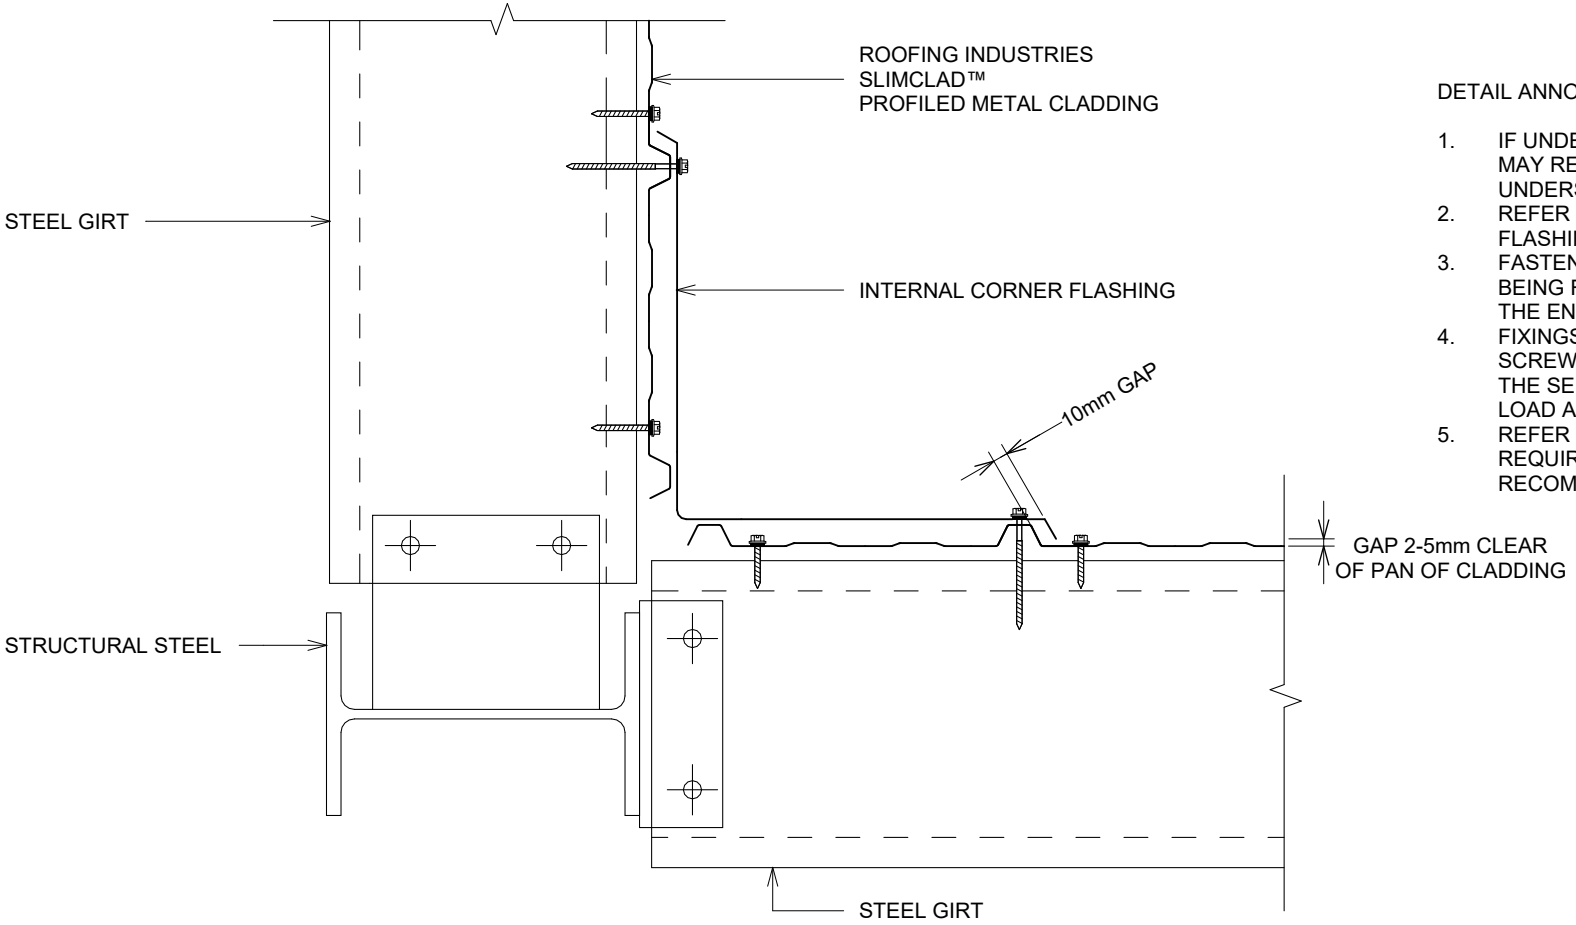

DETAIL ANNOTATION:

1. IF UNDERLAY USED AS A VAPOUR BARRIER IT MAY REQUIRE A 20MM min. GAP BETWEEN THE UNDERSIDE OF THE ROOFING & UNDERLAY.
2. REFER NZMRM CODE OF PRACTICE FOR FLASHING COVER.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FIXINGS: "THE DESIGNER NEEDS TO CHECK THE SCREW MANUFACTURERS TECHNICAL DATA OF THE SELECTED SCREW TYPE FOR THE DESIGN LOAD AND THE MATERIAL BEING FASTENED TO."
5. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING OVER PRECAST PANEL


Detail Number: RI-CSCWVDM-030A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

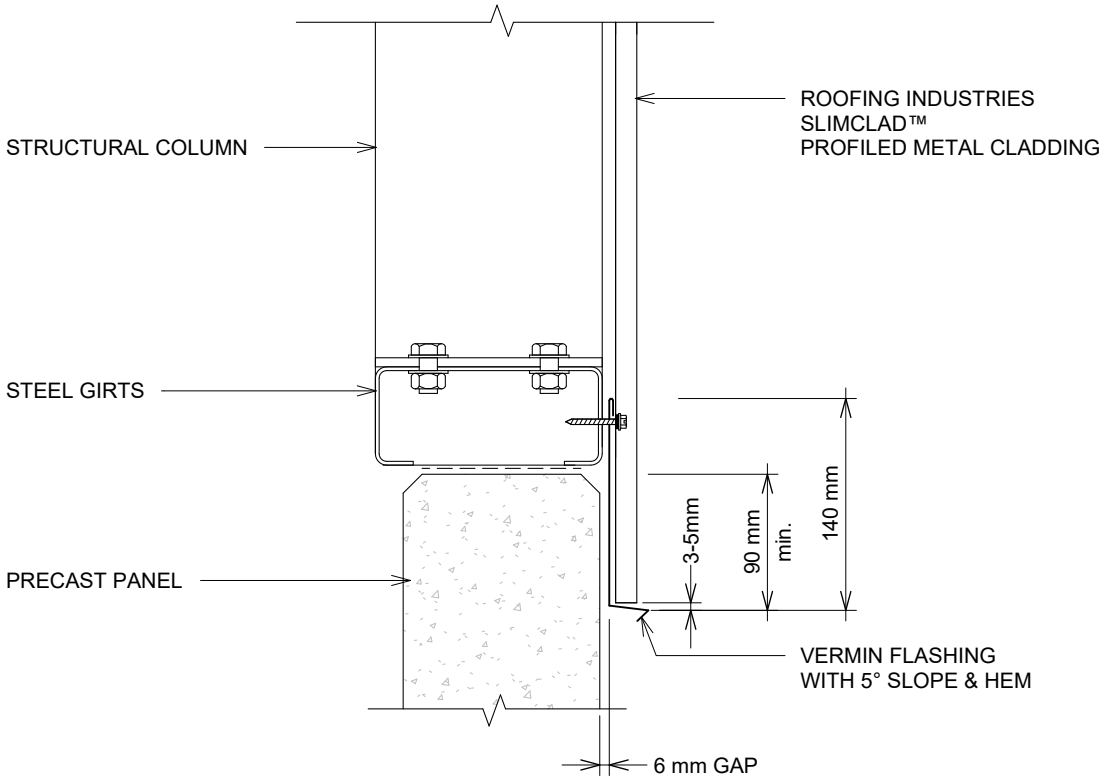


DETAIL ANNOTATION:

1. DPC MUST BE INSTALLED UNDER ALL SURFACES IN CONTACT WITH CONCRETE SUBSTRATE.
2. FOAM CLOSURE STRIP ONLY REQUIRED IN HIGH RISK SITUATIONS OF WIND BLOWN MOISTURE ENTERING.
3. IF UNDERLAY USED AS A VAPOUR BARRIER IT MAY REQUIRE A 20MM min. GAP BETWEEN THE UNDERSIDE OF THE ROOFING & UNDERLAY.
4. REFER NZMRM CODE OF PRACTICE FOR FLASHING COVER.
5. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
6. FIXINGS: "THE DESIGNER NEEDS TO CHECK THE SCREW MANUFACTURERS TECHNICAL DATA OF THE SELECTED SCREW TYPE FOR THE DESIGN LOAD AND THE MATERIAL BEING FASTENED TO."
7. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS
8. THE WALL CAVITY SHALL BE DRAINED AND VENTILATED TO THE EXTERIOR AT THE BASE OF WALL PANELS AND ABOVE OPENINGS. THIS SHALL BE ACHIEVED THROUGH THE USE OF OPEN PERPENDS, WHICH MUST BE FITTED WITH VERMIN-PROOFING WHERE ANY GAP EXCEEDS 13mm.

FLASHING OPTION 1



FLASHING OPTION 2



GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING FLOOR JUNCTION

Detail Number: RI-CSCWVDM-040A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

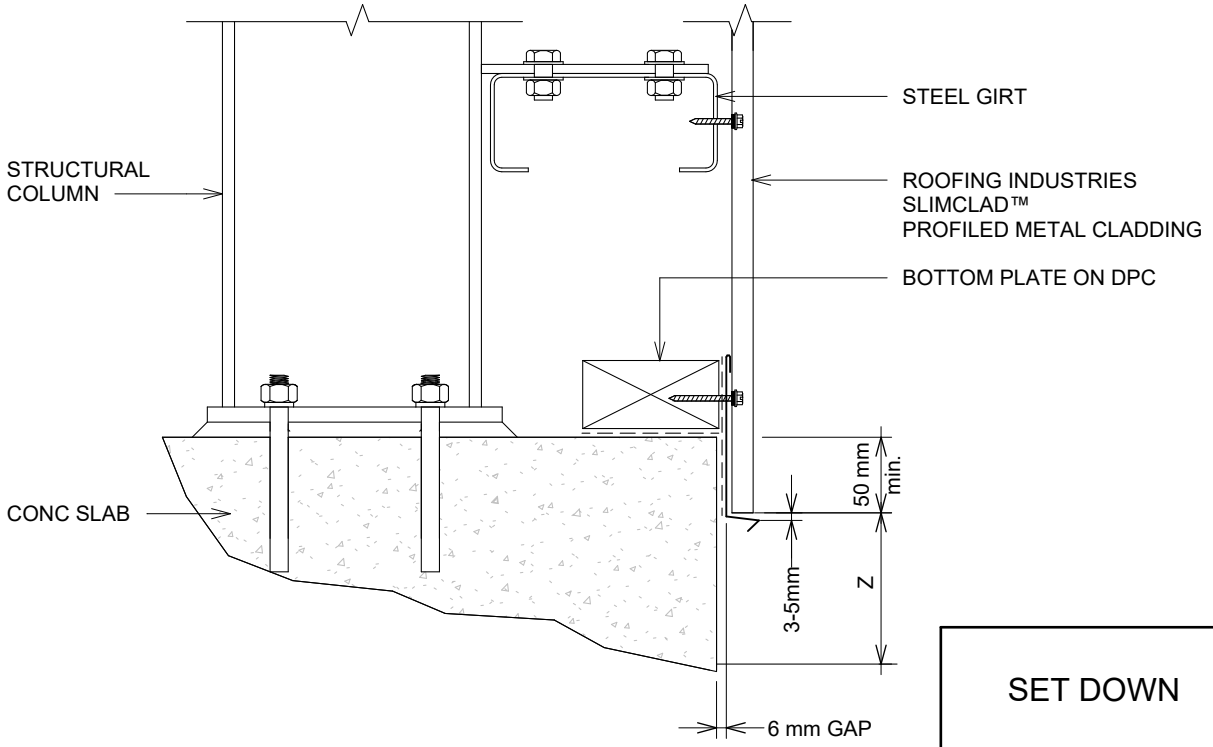


DETAIL ANNOTATION:

1. DPC MUST BE INSTALLED UNDER ALL SURFACES IN CONTACT WITH CONCRETE SUBSTRATE.
2. FOAM CLOSURE STRIP ONLY REQUIRED IN HIGH RISK SITUATIONS OF WIND BLOWN MOISTURE ENTERING.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FIXINGS: "THE DESIGNER NEEDS TO CHECK THE SCREW MANUFACTURERS TECHNICAL DATA OF THE SELECTED SCREW TYPE FOR THE DESIGN LOAD AND THE MATERIAL BEING FASTENED TO."
5. IF UNDERLAY USED AS A VAPOUR BARRIER IT MAY REQUIRE A 20MM min. GAP BETWEEN THE UNDERSIDE OF THE ROOFING & UNDERLAY.
6. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS.
7. THE WALL CAVITY SHALL BE DRAINED AND VENTILATED TO THE EXTERIOR AT THE BASE OF WALL PANELS AND ABOVE OPENINGS. THIS SHALL BE ACHIEVED THROUGH THE USE OF OPEN PERPENDS, WHICH MUST BE FITTED WITH VERMIN-PROOFING WHERE ANY GAP EXCEEDS 13mm.
8. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

SET DOWN	MINIMUM
	Z
PAVED SURFACE	100mm
UNPAVED SURFACE	175mm

FLASHING OPTION 1 FLASHING OPTION 2



GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING TILT PANEL JUNCTION

Detail Number: RI-CSCWVDM-050A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

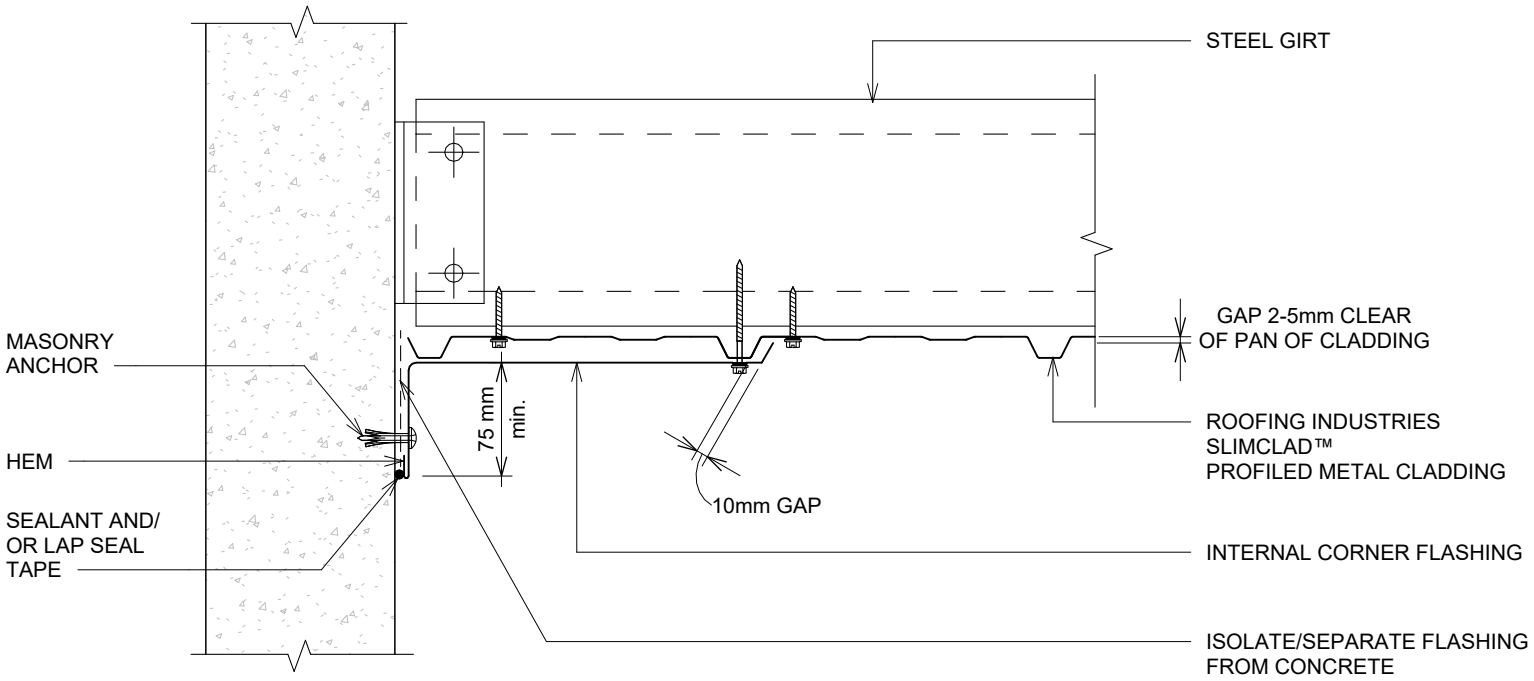

DETAIL ANNOTATION:

1. IF UNDERLAY USED AS A VAPOUR BARRIER IT MAY REQUIRE A 20MM min. GAP BETWEEN THE UNDERSIDE OF THE ROOFING & UNDERLAY.
2. REFER NZMRM CODE OF PRACTICE FOR FLASHING COVER.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FIXINGS: "THE DESIGNER NEEDS TO CHECK THE SCREW MANUFACTURERS TECHNICAL DATA OF THE SELECTED SCREW TYPE FOR THE DESIGN LOAD AND THE MATERIAL BEING FASTENED TO."
5. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING TILT PANEL JUNCTION

Detail Number: RI-CSCWVDM-060A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

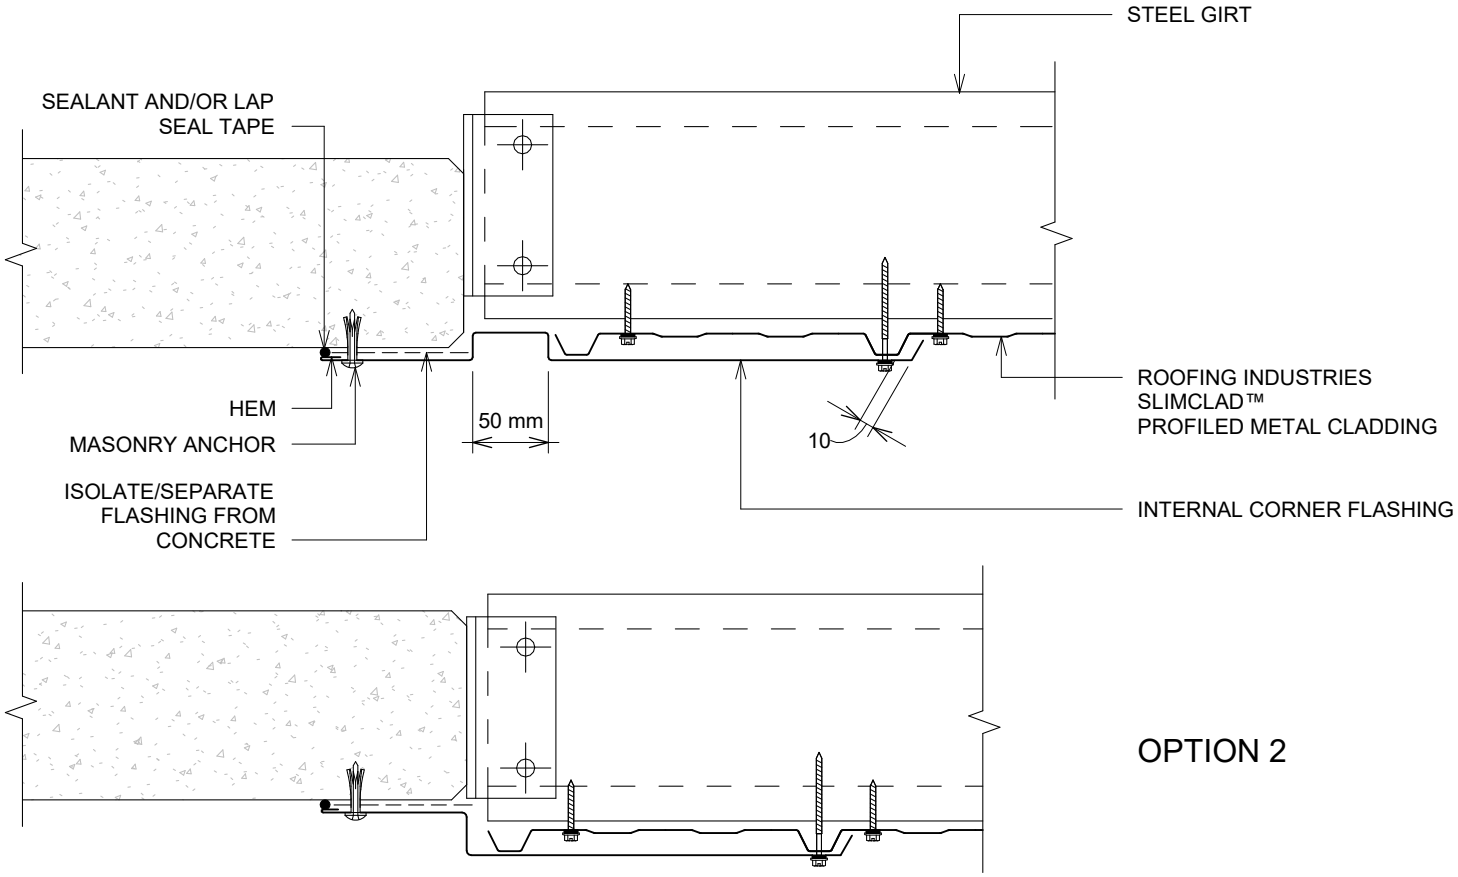

OPTION 2

DETAIL ANNOTATION:

1. IF UNDERLAY USED AS A VAPOUR BARRIER IT MAY REQUIRE A 20MM min. GAP BETWEEN THE UNDERSIDE OF THE ROOFING & UNDERLAY.
2. REFER NZMRM CODE OF PRACTICE FOR FLASHING COVER.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FIXINGS: "THE DESIGNER NEEDS TO CHECK THE SCREW MANUFACTURERS TECHNICAL DATA OF THE SELECTED SCREW TYPE FOR THE DESIGN LOAD AND THE MATERIAL BEING FASTENED TO."
5. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
VERTICAL BUTT FLASHING (CLADDING CHANGE)

Detail Number: RI-CSCWVDM-070A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

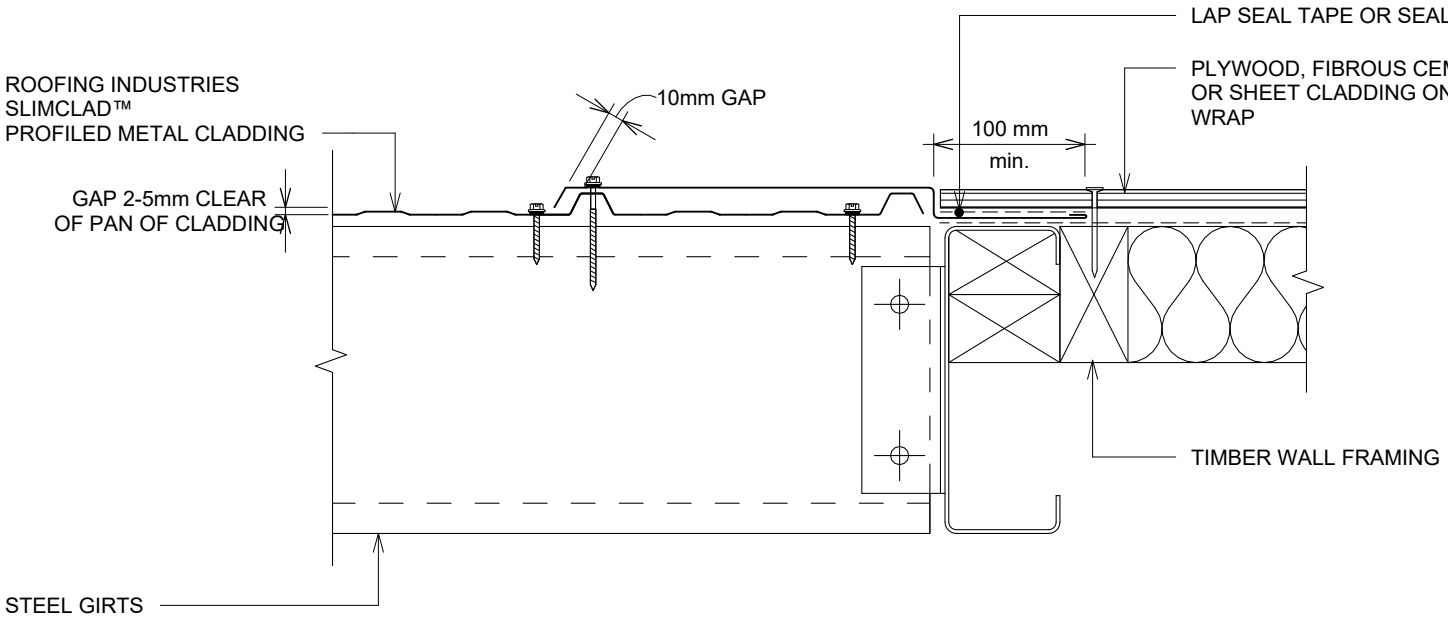

DETAIL ANNOTATION:

1. IF UNDERLAY USED AS A VAPOUR BARRIER IT MAY REQUIRE A 20MM min. GAP BETWEEN THE UNDERSIDE OF THE ROOFING & UNDERLAY.
2. REFER NZMRM CODE OF PRACTICE FOR FLASHING COVER.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FIXINGS: "THE DESIGNER NEEDS TO CHECK THE SCREW MANUFACTURERS TECHNICAL DATA OF THE SELECTED SCREW TYPE FOR THE DESIGN LOAD AND THE MATERIAL BEING FASTENED TO."
5. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS.
6. TIMBER CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING BY DPC, BUILDING WRAP, PVC OR PAINTING.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
WINDOW/DOOR HEAD FLASHING

Detail Number: RI-CSCWVDM-120A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

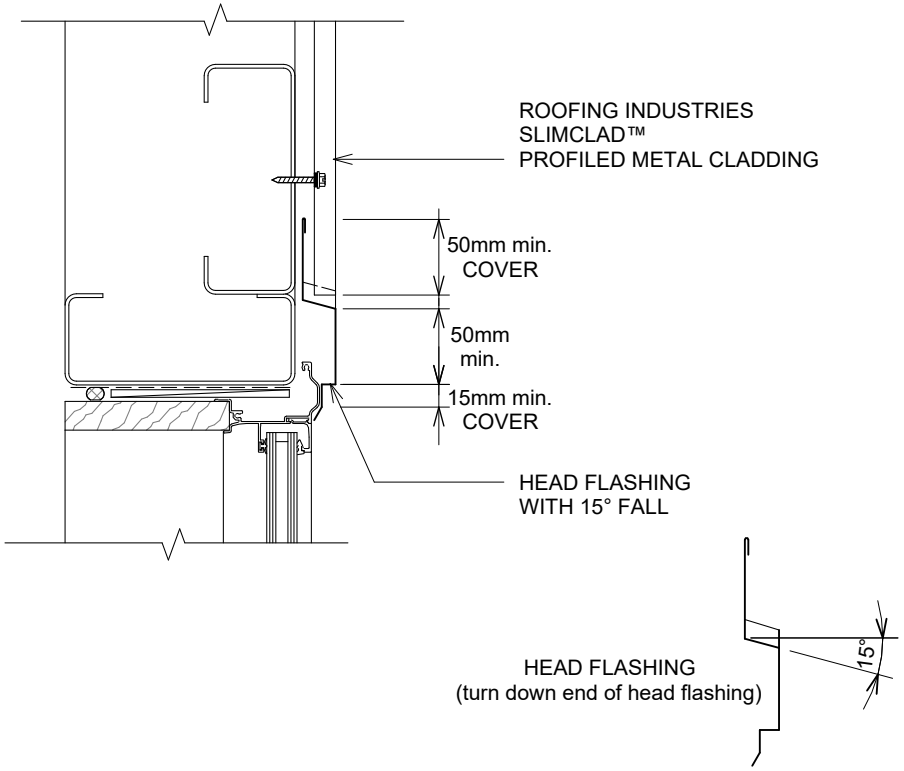

DETAIL ANNOTATION:

1. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
2. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
3. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS.
4. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz


COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
WINDOW/DOOR JAMB FLASHING OPTION 1

Detail Number: RI-CSCWVDM-120B
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

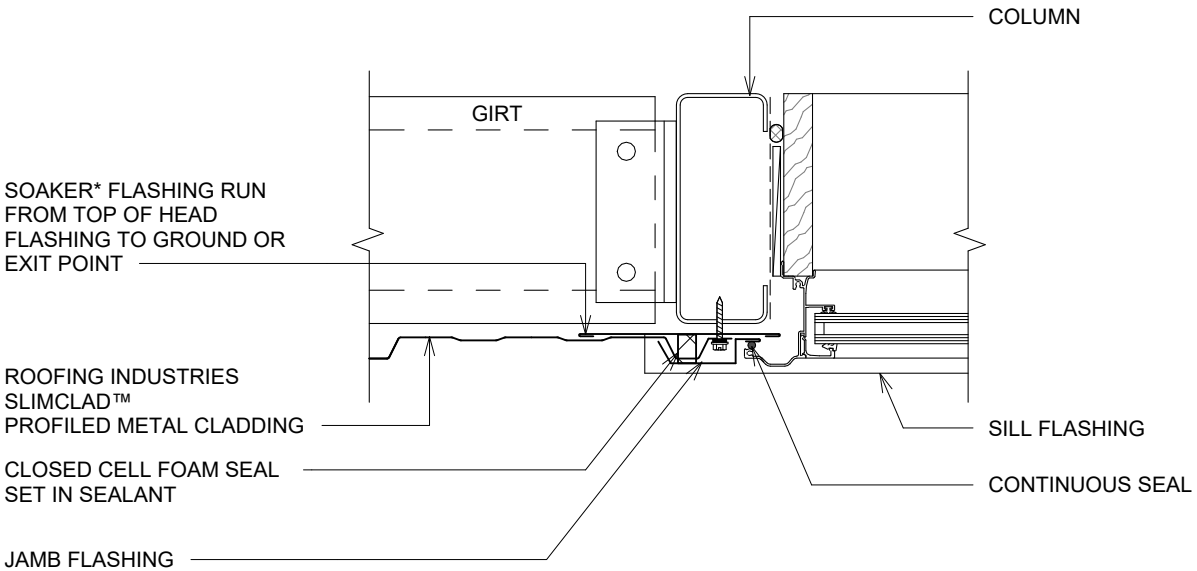

DETAIL ANNOTATION:

1. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
2. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
3. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS.
4. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.



*Soaker size may require to increase to ensure coverage at ends of head flashings. (Dimensions are indicative only) Turn down end of head flashing

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
WINDOW/DOOR JAMB FLASHING OPTION 2

Detail Number: RI-CSCWVDM-120B-1
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

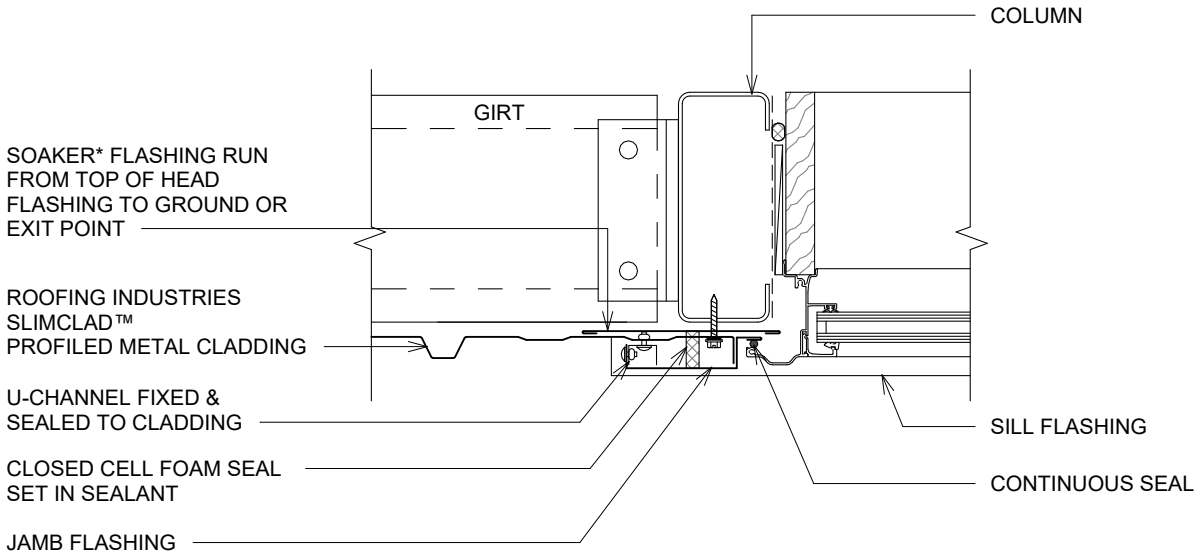

DETAIL ANNOTATION:

1. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
2. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
3. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS.
4. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.

JAMB FLASHING



*Soaker size may require to increase to ensure coverage at ends of head flashings. (Dimensions are indicative only) Turn down end of head flashing

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
WINDOW/DOOR SILL FLASHING


Detail Number: RI-CSCWVDM-120C
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

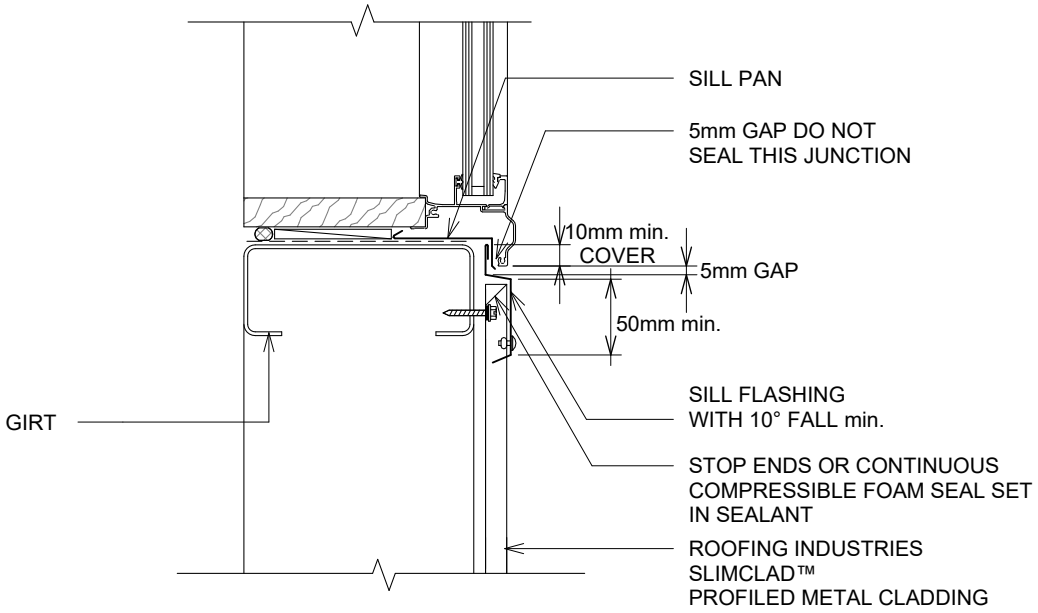

DETAIL ANNOTATION:

1. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
2. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
3. REFER TO UNDERLAY MANUFACTURERS REQUIREMENTS FOR INSTALLATION RECOMMENDATIONS.
4. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.

SILL FLASHING
Sill flashings stop ended to receive jamb flashings



GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
WINDOW/DOOR FLASHING LAYOUT OPTION 1

Detail Number: RI-CSCWVDM-120D
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

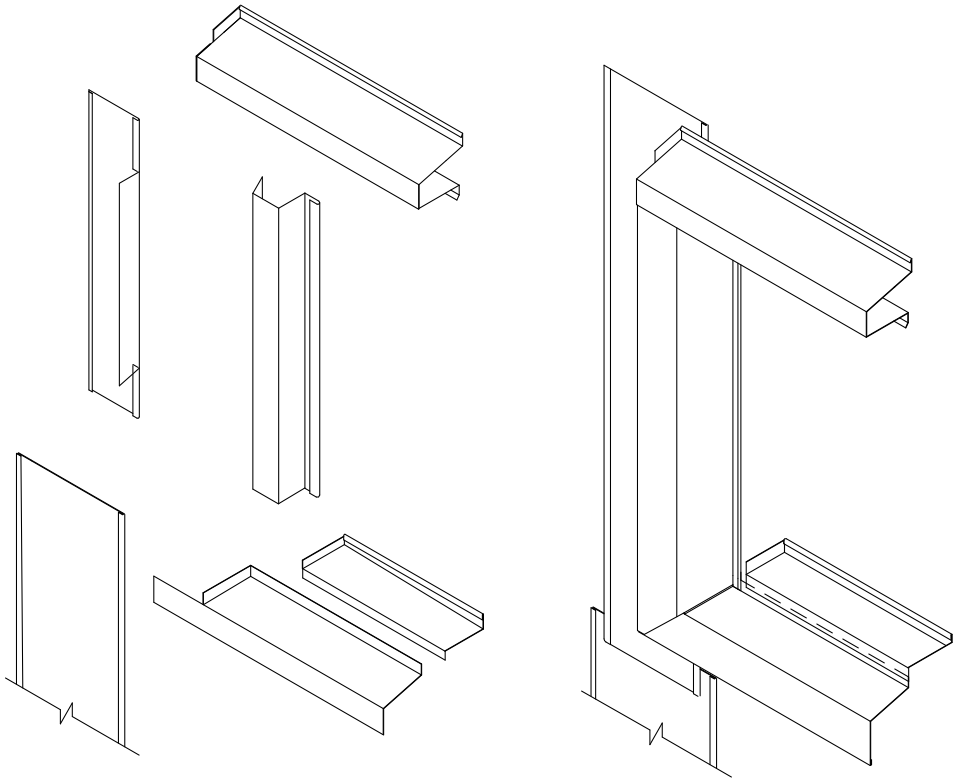

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
WINDOW/DOOR FLASHING LAYOUT OPTION 2

Detail Number: RI-CSCWVDM-120D-1
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

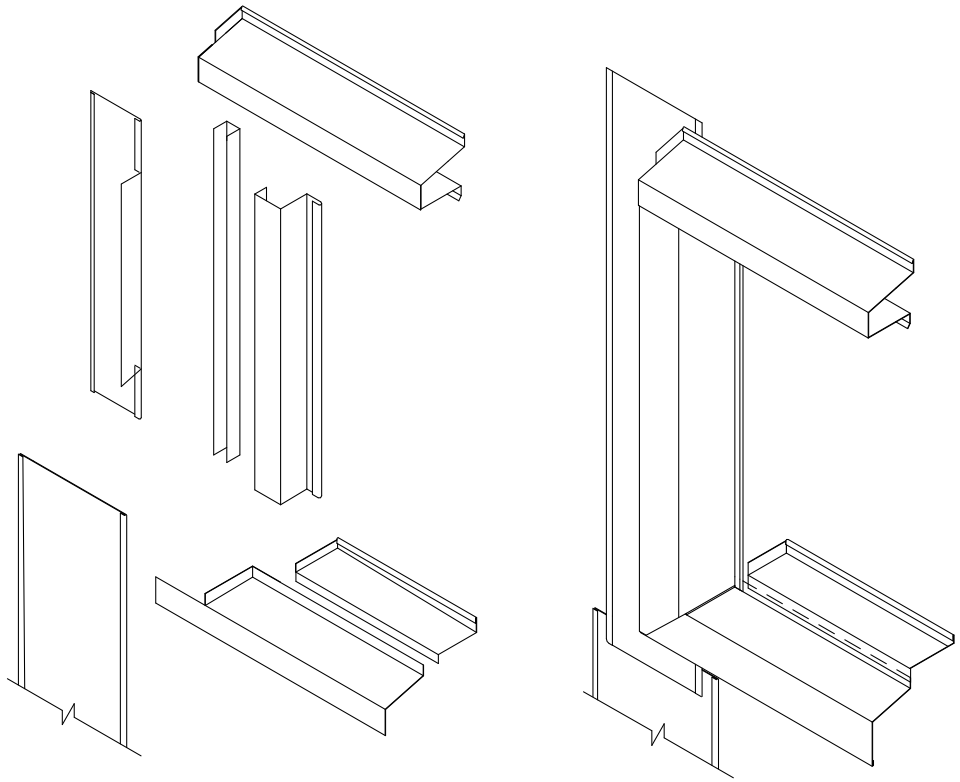

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
ROLLER DOOR HEAD

Detail Number: RI-CSCWVDM-190A
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

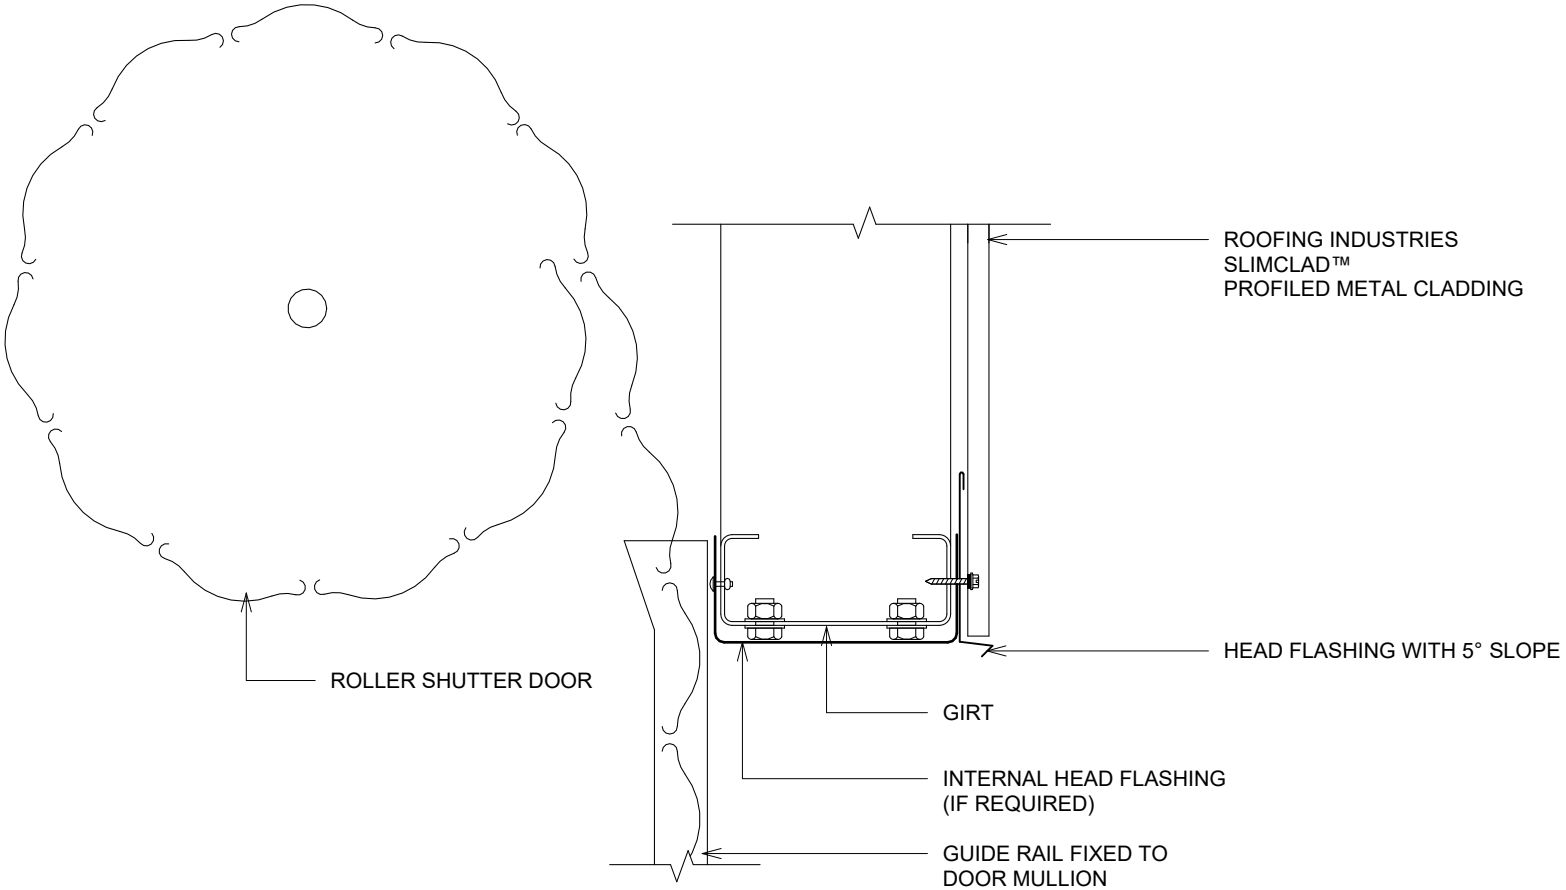

DETAIL ANNOTATION:

1. IF UNDERLAY USED AS A VAPOUR BARRIER IT MAY REQUIRE A 20MM min. GAP BETWEEN THE UNDERSIDE OF THE ROOFING & UNDERLAY.
2. REFER TO NZMRM CODE OF PRACTICE FOR FLASHING COVER.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FIXINGS: “THE DESIGNER NEEDS TO CHECK THE SCREW MANUFACTURERS TECHNICAL DATA OF THE SELECTED SCREW TYPE FOR THE DESIGN LOAD AND THE MATERIAL BEING FASTENED TO”.
5. THE WALL CAVITY SHALL BE DRAINED AND VENTILATED TO THE EXTERIOR AT THE BASE OF WALL PANELS AND ABOVE OPENINGS. THIS SHALL BE ACHIEVED THROUGH THE USE OF OPEN PERPENDS, WHICH MUST BE FITTED WITH VERMIN-PROOFING WHERE ANY GAP EXCEEDS 13mm.

GENERAL NOTES:


- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz

COMMERCIAL SLIMCLAD™ VERTICAL CLADDING ON STEEL FRAMING
ROLLER DOOR JAMB

Detail Number: RI-CSCWVDM-190B
Date drawn: 25/08/2026
Scale: 1 : 5@ A4

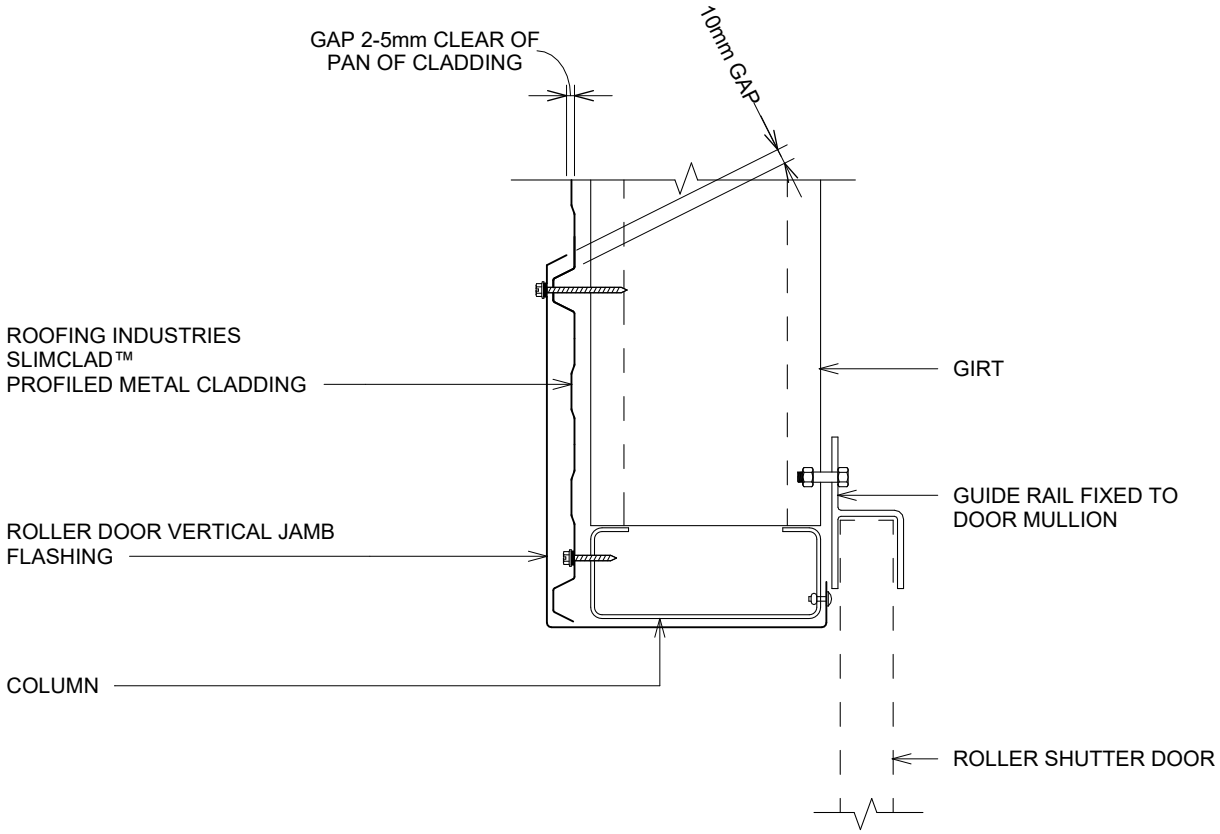

DETAIL ANNOTATION:

1. FOR FLASHING COVER REFER TO NZMRM CODE OF PRACTICE
2. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED

GENERAL NOTES:

- These details to be read with Roofing Industries SLIMCLAD™ REVERSE RUN Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2026

Roofing Industries
roof.co.nz