
EUROSTYLE EUROLOK™ ROOFING PENETRATION FLASHING CROSS SECTION

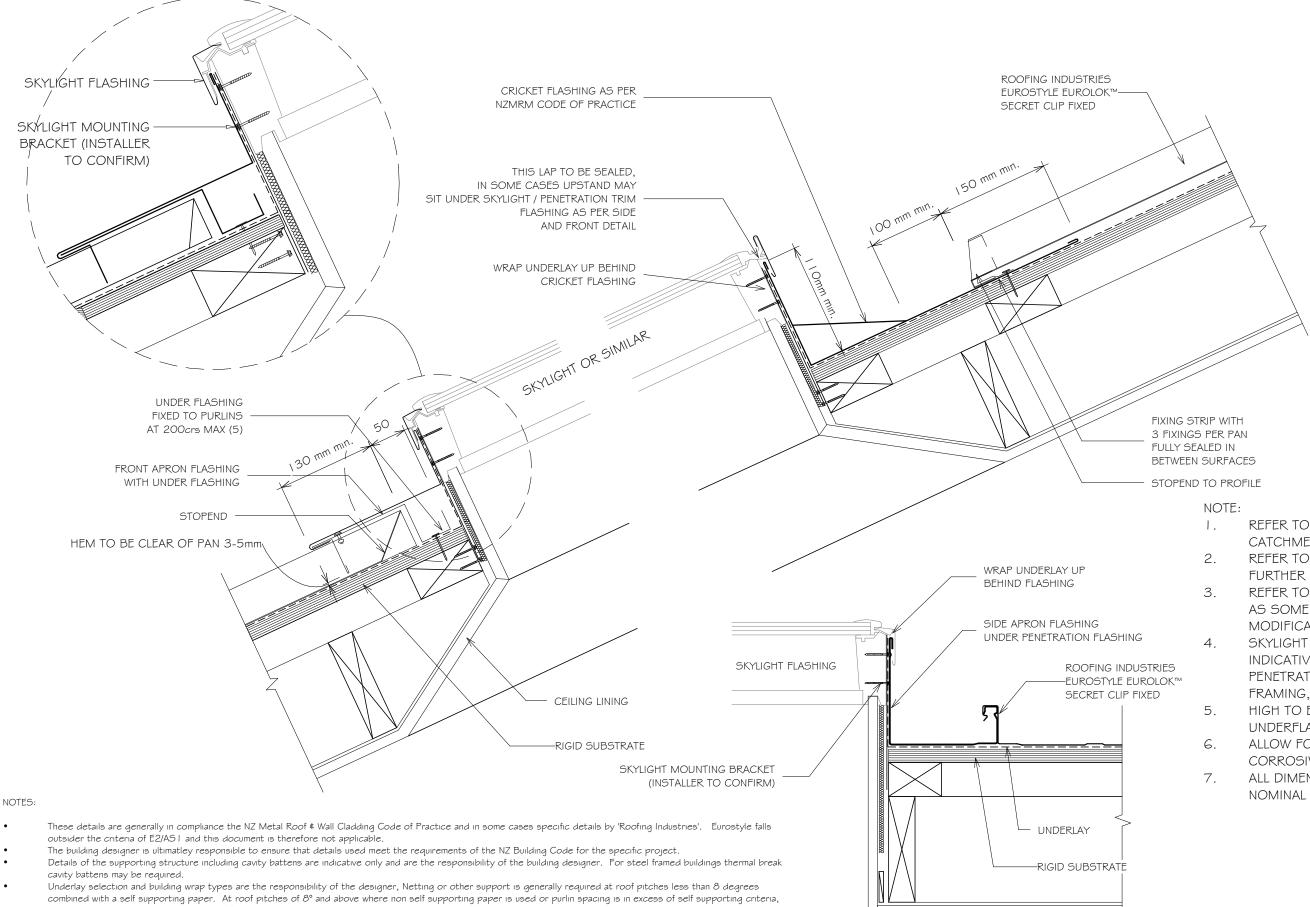

- netting or other support should be used. Alternative support to netting should be used in severe coastal environments including when aluminium is used
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- These details to be read with Roofing Industries profile technical summary regarding wind loads and fixings.
- Further information can be obtained from the NZ Metal Roof \$ Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS I.

Detail Number: RI-EE50R081AS Date drawn: 02/02/18 Scale: 1:5@ A3

- REFER TO NZMRM CODE OF PRACTICE FOR CATCHMENT AREA LIMITATIONS.
- REFER TO NZMRM CODE OF PRACTICE FOR FURTHER INFORMATION.
- REFER TO SKYLIGHT MANUFACTURERS DETAILS AS SOME LOW PITCH INSTALLATIONS REQUIRE MODIFICATIONS TO THESE DETAILS.
- SKYLIGHT MOUNTING BRACKETS ARE INDICATIVE ONLY AND DIFFERENT SKYLIGHTS / PENETRATIONS MAY REQUIRE DIFFERENT FRAMING, MOUNTING AND FLASHING DETAILS.
- HIGH TO EXTRA HIGH WIND ZONE DOUBLE FIX UNDERFLASHINGS.
- ALLOW FOR SEPARATION FROM ANY CORROSIVE TIMBER TREATMENT.
- ALL DIMENSIONS SHOWN ON DRAWINGS ARE NOMINAL +/- 5mm

Copyright detail (C) 2017

