
EUROSTYLE EUROLOK™ WALL CLADDING WINDOW / DOOR HEAD FLASHING FOR VERTICAL CLADDING ON CAVITY

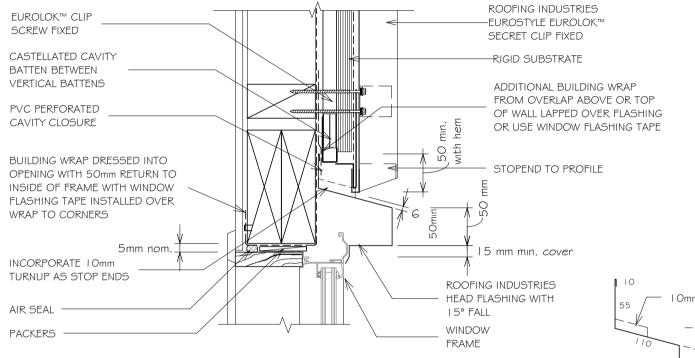

Detail Number: RI-EE50W012AS

Date drawn: 02/02/18

Scale: 1:5@ A4

GENERAL NOTES:

- REFER TO E2/AS | FOR GENERAL WINDOW OPENING FOR 1 WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
- 2 A MIN OF 8mm FFFFCTIVE COVER AT SILLS SHALL BE PERMITTED WHERE NECESSARY TO ALLOW FOR TOLERANCES
- WINDOW PROFILE TO BE SELECTED TO ACHIEVE COVER 3. SHOWN IN DETAILS
- 4. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY. DETAIL MAY BE USED WITH REBATED LINER.
- 5. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.
- 6 SEAL HEAD FLASHING TO WINDOW IN VERY HIGH & EXTRA HIGH WIND ZONES
- 7. ALLOW FOR SEPARATION FROM ANY CORROSIVE TIMBER TRFATMENT
- 8. ALL DIMENSIONS SHOWN ON DRAWINGS ARE NOMINAL +/-5mm
- CASTELLATED TIMBER BATTEN OR APPROVED DRAINED 9 BATTEN MAY BE USED WITH THIS SYSTEM.

REFERENCE FLASHINGS: NZ METAL ROOF AND WALL CLADDING CODE OF PRACTICE. F2/AST OR REFER MANUE DETAILING DIMENSIONS ARE INDICATIVE ONLY

Copyright detail (C) 2017



NOTES:

- These details are generally in compliance the NZ Metal Roof # Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'. Eurostyle falls outsider the criteria of E2/AS1 and this document is therefore not applicable.
- The building designer is ultimatley responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure including cavity battens are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Underlay selection and building wrap types are the responsibility of the designer.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- These details to be read with Roofing Industries profile technical summary regarding wind loads and fixings.
- Further information can be obtained from the NZ Metal Roof # Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1.

10mm STOP FNDS 50 min 47

(Dimensions are indicative only) Turn down end of head flashing to jamb flashing