
RESIDENTIAL MULTIRIB ROOFING RIDGE AND HIP FLASHING (SQUARE TOP)

Detail Number: RI-RMRR005B Date drawn: 07/07/2017 Scale: 1:5@ A4

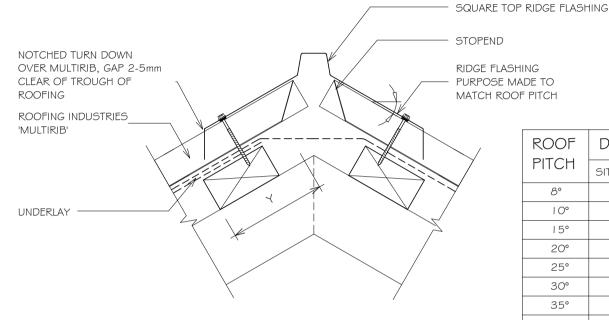

ROOF DISTANCE Y mm PITCH SITUATION SITUATION 2 8° N/A 218 167 10° 217 15° 162 212 200 156 206 25° 150 200 30° 143 193 35° 134 184 40° 125 17545° 115 165 FOR STANDARD 50mm PURLINS ON FLAT

SITE WIND ZONE	MINIMUM mm (X)
(As per NZS3604)	TRANSVERSE FLASHING OVER ROOFING
SITUATION I (1)	I 30 ⁽³⁾
SITUATION 2 (2)	200 ⁽³⁾

NOTES:

- 1. SITUATION 1: IN LOW, MEDIUM OR HIGH WIND ZONES, WHERE ROOF PITCH IS 10° OR GREATER.
- 2. SITUATION 2: FOR ALL ROOF PITCHES IN VERY HIGH AND EXTRA HIGH WIND ZONES, FOR ALL WIND ZONES WHERE ROOF PITCH LESS THAN 10°.
- 3. EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING.
- 4. FOR VENTILATION, BUILDING PAPER MAY REQUIRE SLOTS CUT AT RIDGE LINE. REFER MRM CODE OF PRACTICE.





NOTES:

- These details are generally in compliance with E2/AS I and/or the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimatley responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure including cavity battens are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Underlay selection and building wrap types are the responsibility of the designer, Netting or other support is generally required at roof pitches less than 8 degrees combined with a self supporting paper. At roof pitches of 8° and above where non self supporting paper is used or purlin spacing is in excess of self supporting criteria, netting or other support should be used. Alternative support to netting should be used in severe coastal environments including when aluminium is used.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- These details to be read with Roofing Industries profile technical summary regarding wind loads and fixings.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz OR NZBC clause E2/AS1.