





FRAMELESS BALUSTRADE SYSTEMS

Laguna Hydraulic Gate Hinges : Cut Out & installation details

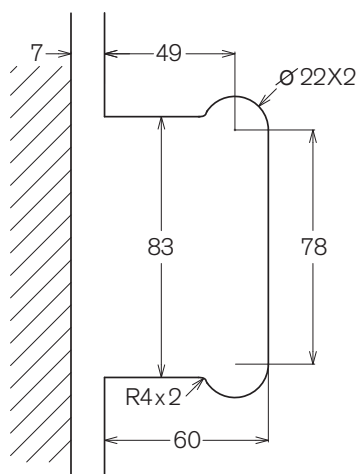



Wall to Glass Cut Out

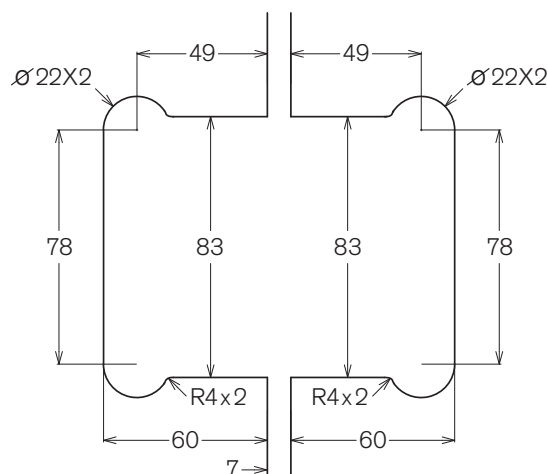

Glass to Glass Cut Out

Door alignment

1. Remove covers (E)
2. Loosen allen screws by 360° (D)
3. Adjust to required angle and retighten allen screws (D)
4. (C) is slotted speed valve.

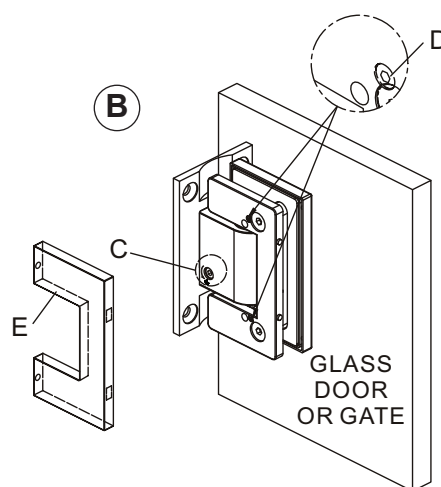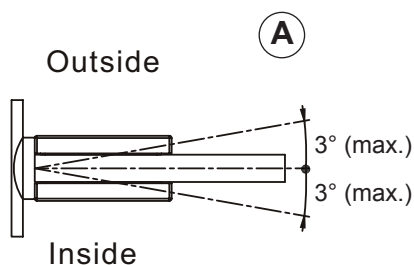

These self closing hydraulic gate hinges are designed to close gates up to 1000mm wide in external and in internal installations. They are designed to be used with the range of MFG Mag Latches for pool gates. Hinges are Non Hold Open. The hinges are available in both glass to glass and glass to post/wall models and both models are Non Handed, meaning they can be hung on either side of the gate opening. Gaskets are provided so the glass gate and side panels can be 10mm or 12mm toughened glass.

1. Remove clip on covers and install the hinges. Ensure all clearances are correct.
2. If gate requires alignment, loosen allen keys on both hinges by 360° as per detail B. Set the door to correct alignment and retighten allen screws.
3. To set closing speed, close slotted screws on both hinges then open both 1/4 of a turn. Then open or close slotted valves to obtain required closing speed. Take care to ensure the valves of each hinge are synchronized so they close at equal speed.
4. Install clip on covers.

Ex Auckland Store. All prices exclude G.S.T.