


Fax Order/Quotation Form

GLASS STANDOFF ANCHORS

Order Request Price Request

Company Name: _____ Order Number: _____

Contact Name: _____ Date: _____

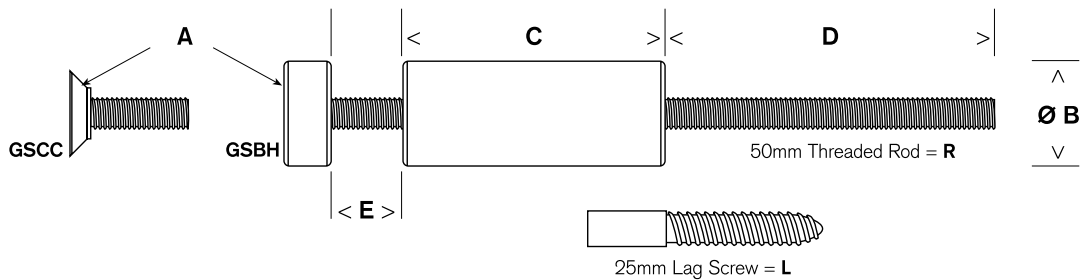


| | | | |
|--------------------------------|--|--------------|----------------------|
| A Head Type | Covered Countersunk Bush Button Head | GSCC GSBH | <input type="text"/> |
| B Glass Anchor Diameter | Ø19mm, Ø25mm, Ø32mm, Ø38mm - 304SSS, Ø50mm - 316SSS | | <input type="text"/> |
| C Standoff Length | 25mm, 50mm, Special length (specify) | | <input type="text"/> |
| D Fixing Type | Threaded Rod, 50mm long Wood Fix Lag Screw, 25mm long | R L | <input type="text"/> |
| E Glass Thickness | 6mm, 8mm, 10mm, 12mm, 15mm, 19mm, Other (mm) | | <input type="text"/> |
| F Quantity Required | | | <input type="text"/> |

| Anchor Diameter | Thread Size | Glass Hole Size For Button Head |
|-----------------|-------------|---------------------------------|
| Ø19mm and Ø25mm | M6 | 10mm |
| Ø32mm and Ø38mm | M8 | 12mm |
| Ø50mm | M10 | 16mm |

Note

Before drilling or countersinking glass check catalogue for correct dimensions.

CCB HOLE PREPARATION

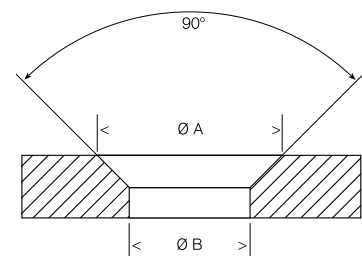

| Anchor Diameter | Counter Sunk Head Type | Glass Counter Sunk Dimensions |
|-----------------|------------------------|-------------------------------|
| Ø19mm x Ø25mm | CCB6 | A=22mm B=10mm |
| Ø32mm x Ø38mm | CCB8 | A=26mm B=14mm |
| Ø50mm | CCB10 | A=30mm B=18mm |

Ex Auckland Store. All prices exclude G.S.T.