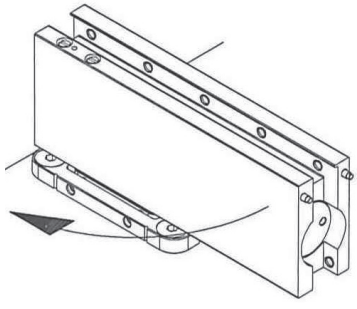


Merchant Price List

FRAMELESS COMMERCIAL HARDWARE

Ozone HS - High Strength Hydraulic Patch Fitting EN5

Product	Code	Description	Finish	Price
	FH-105 HO	Ozone High Strength Hydraulic Self Closing Patch 90° Hold Open	316 SSS	
	FH-105 NHO	Ozone High Strength Hydraulic Self Closing Patch Non Hold Open	316 SSS	

FH-105 Ozone high strength floor mounted patch fitting suitable for both internal and external doors.


Internal door max width = 1250mm External door max width = 1000mm


Simple installation with four screw fixings into any floor. Adjustable base plate for easy alignment of the door in either direction shown in diagram below.

Suitable for single or double action doors. Used in conjunction with standard MP20 top patch fitting. Two speed closing adjustment as shown below.

Suits toughened frameless glass doors from 10mm - 15mm thick with a maximum door weight of 100kg's.

Adjust the Door position

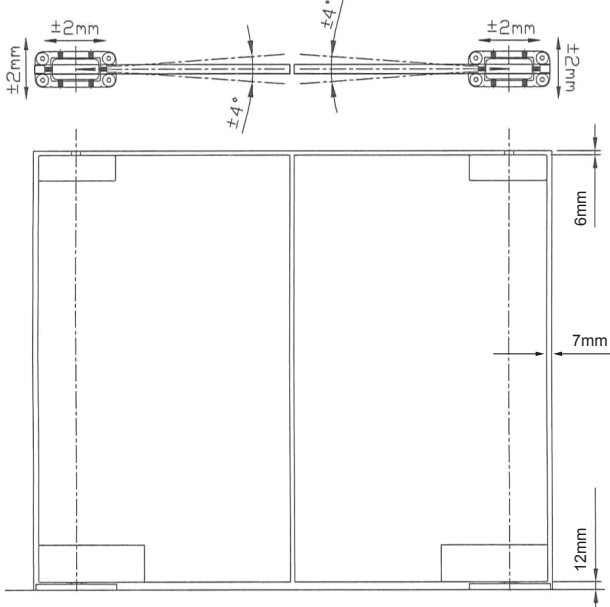

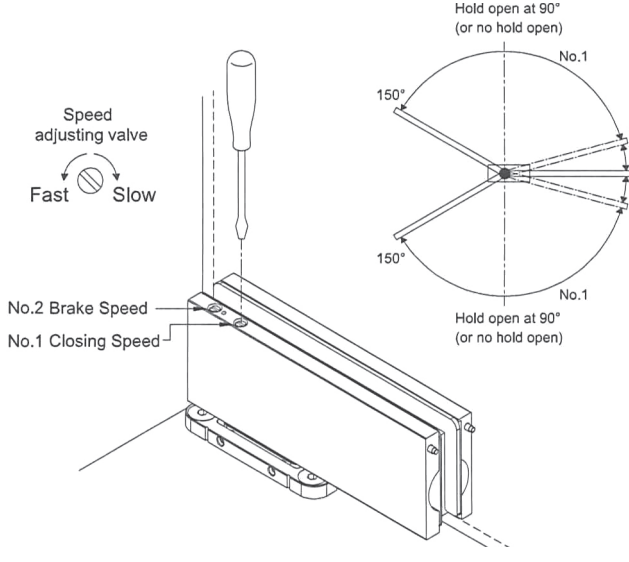

Ex Auckland Store. All prices exclude G.S.T.