




Instant Hot Water Systems

NeoTank™ - International Model: NXT

Stainless Steel Tank dispenses filtered steaming hot water instantly.

Water tap sold separately.

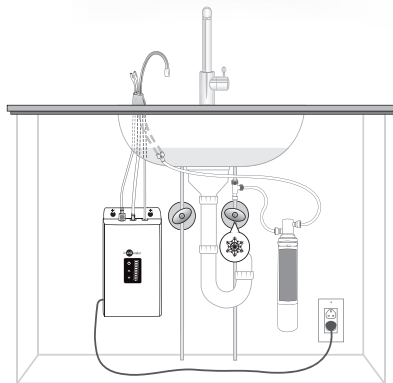

Submittal Sheet

- 2.5 litre stainless steel tank
- Easy to adjust electronic temperature control from 88 - 98°C
- Maintains the precise temperature setting $\pm 0.5^\circ\text{C}$
- Tool-free tank connections and dry start protection to ease installation
- 220-240 volts, 1300 watts, 5.7 amps
- For use with InSinkErator instant hot water taps, integrated faucets and filtration systems
- Unit not for commercial/industrial use


Specifications

Capacity	2.5 litre stainless steel tank
Electrical	220-240 volts, A.C., 1300 watts, 5.7 amp heating element with grounded plug
Thermostat	Electronic adjustable from 88°C to 98°C (factory pre-set at 96°C)
Insulation	Meets U.L. 94HF-1 flammability specification
Recommended Supply Pressure	1.7-8.6 bar
Shipping Weight	Approximately 2.7 kg Tank, 4.7 kg w/filtration system

Sample Specification

Instant hot water tap(s) shall be equipped with an InSinkErator NXTF stainless steel tank with filtration, adjustable internal water temperature from 88°C to 98°C with self-closing hot valve.

Dimensions

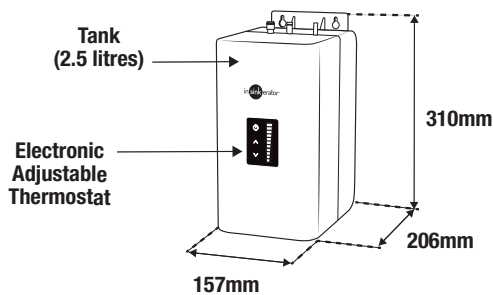

In-Home Parts and Service Limited Warranty*

Tank: 2-years
 Filtration System: 1-year
 (excluding replaceable filter cartridge)

* The complete InSinkErator warranty is included in the Care & Use booklet packed with each unit.



Sales Tel: 0800 200 510
Service Tel: 0800 200 510
Email: info.parex@emerson.co.nz
Website: www.insinkerator.co.nz

Parex Industries Ltd.
 5 Tolich Place, Henderson
 Auckland, New Zealand 0610

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.

© 2017 InSinkErator, InSinkErator® is a business unit of Emerson Electric Co. All Rights Reserved.