

Texture Coating Systems

The Ultimate in Protection, Durability & Style



EXSULITE[®] EXTERNAL INSULATING AND FINISHING SYSTEMS (EIFS) CLADDING SYSTEM

Dulux AcraTex systems use premium quality products that give the aesthetic appeal, value for money and outstanding performance that you would expect from *Dulux AcraTex*.

Whether it's a multi-story Commercial application or Residential dream home, *Dulux AcraTex* has the performance coating solution to deliver long term protection of any masonry substrate.

The range of exterior and interior acrylic texture coatings give long lasting protection and are available in a large selection of fashionable colours and profiles.

Supported with specialised project specification and technical service, *Dulux AcraTex* provides practical and efficient system solutions to satisfy both the aesthetic and technical demands of your project.

Exsulite[®]

EIFS Cladding System by



Texture Coating Systems

The Ultimate in Protection, Durability & Style



Specifications: *Exsulite* EIFS Cladding System

Substrate

Exsulite EIFS Cladding System:

This is a plastering system for application on Expanded Polystyrene Sheets (EPS), which have been installed over an approved drained and ventilated cavity, and comprising cement based polymer modified plasters, alkali resistant fibreglass mesh and assorted PVC flashings and trim.

The polystyrene sheets are mechanically fixed over a 20mm cavity, to timber or steel framing, or bonded directly onto masonry surfaces. This system is also ideal for the plastering and weatherproofing requirements of Structural Polystyrene Blocks.

The *Dulux AcraTex Exsulite* EIFS Cladding System is a three coat plaster system incorporating embedded alkali reinforced fibreglass mesh and selected finishing coats. The main plaster component is the *Dulux AcraTex P400 Meshing Render*, which provides a tough, durable and crack resistant base coat when used in conjunction with the alkali reinforcing mesh.

Building Regulations

When installed and maintained according to the details given in the *Dulux AcraTex EIFS Installation Manual*, The *Dulux AcraTex Exsulite* EIFS Cladding System will meet the provisions of the New Zealand Building Code as specified in the *Dulux AcraTex EIFS Installation Manual*.



Texture And Coating

This system can be finished with a *Dulux AcraTex* cement based texture or any pre-coloured texture from the *Dulux AcraTex* range. These trowel or sprayed textures can then be applied over the entire sheet and finished to desired profile.

The *AcraTex* acrylic textures are pre-tinted to the chosen colour to give a rich deep textured look. All *AcraTex* texture coatings must be over coated with *AcraShield Advance* which can be tinted to colours in the *Dulux Colour Range*.

It should be noted that the colours chosen for an E.I.F.S system need to comply with manufacturers recommendations and must have an LRV (Light Reflectance Value) of greater than 40%.

All texture and colour samples must be signed by the architect or owner prior to application. Dulux AcraTex recommends that all AcraTex products are applied by a qualified contractor to ensure integrity of the system for warranty requirements.

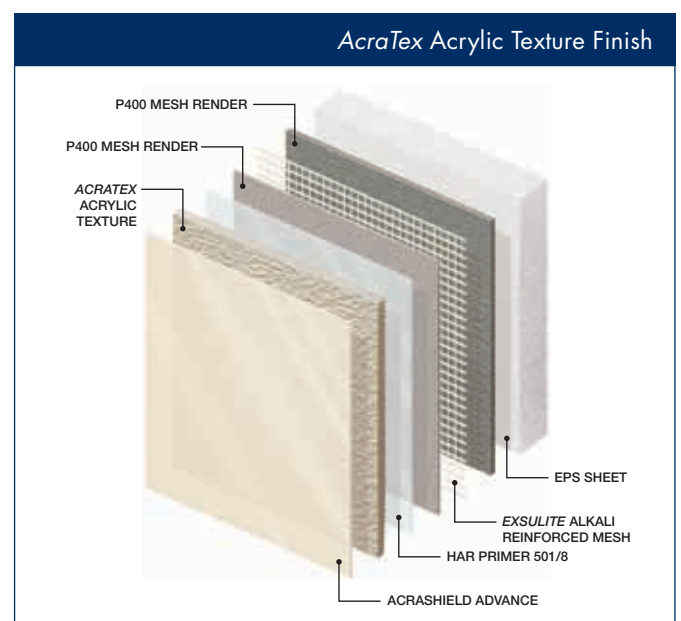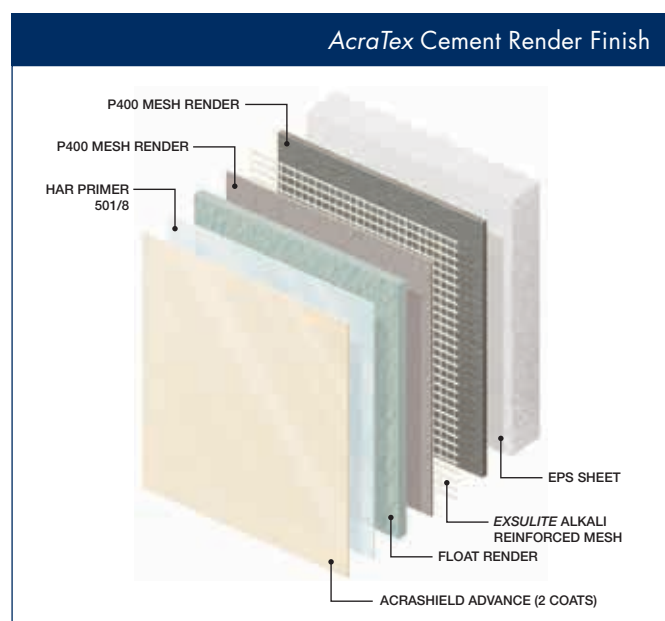

For further information go to dulux.co.nz or call Customer Service on **0800 800 424**

Dulux® AcraTex® is a division of DuluxGroup (Australia) Pty Ltd. ABN 67 000 049 427. Dulux®, AcraTex® and Exsulite® are registered trade marks of DuluxGroup (Australia) Pty Ltd.