

Pacific Doors

Data Sheet

www.pacificdoors.co.nz

Issue date: 6/26/25

Pacific Single Glazed Timber Framed Acoustic Windows SPA39-AW

Page 1 of 2

DESCRIPTION

Pacific Acoustic Windows are glazing units designed and tested for sound attenuation to a range of STC ratings. The units are all timber framed with fixed glazing, for interior use.

For further information on this product, visit:

https://www.pacificdoors.co.nz/products/acoustic/acoustic-windows/spa39-aw

PRODUCT OPTIONS

Single glazed units are supplied fully glazed in ready-to-install mode. Large units may require site glazing.

Window type	Max Glazed Area		Clear View		Overall Frame		Frame Type		STC
			Min. mm	Max. mm	Min. mm	Max. mm	Timber	Steel	Rating
SPA39- AW	4.9m2	Height	350	3000	478	3128	√	-	39
		Width	150	2500	278	2628	√	-	39



Sizing Rules

The tested clear view size for this window is 1510mm H x 810mm W. Acoustic performance may vary for extremely large or small units.


Data Sheet



Frame Types & Profiles

Timber Frame

This window is available in the below frame profile.

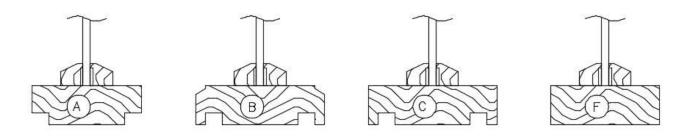

Standard jamb thicknesses are 30mm and 42mm. For more in-depth information on frame profiles and sizes, please see our Installation Instructions.

Steel Frame

These units are not available in a steel frame.

Wall Types

• Masonry or Gib® Systems.

The entire assembly, including wall, frame, and window glazing, is the tested unit.