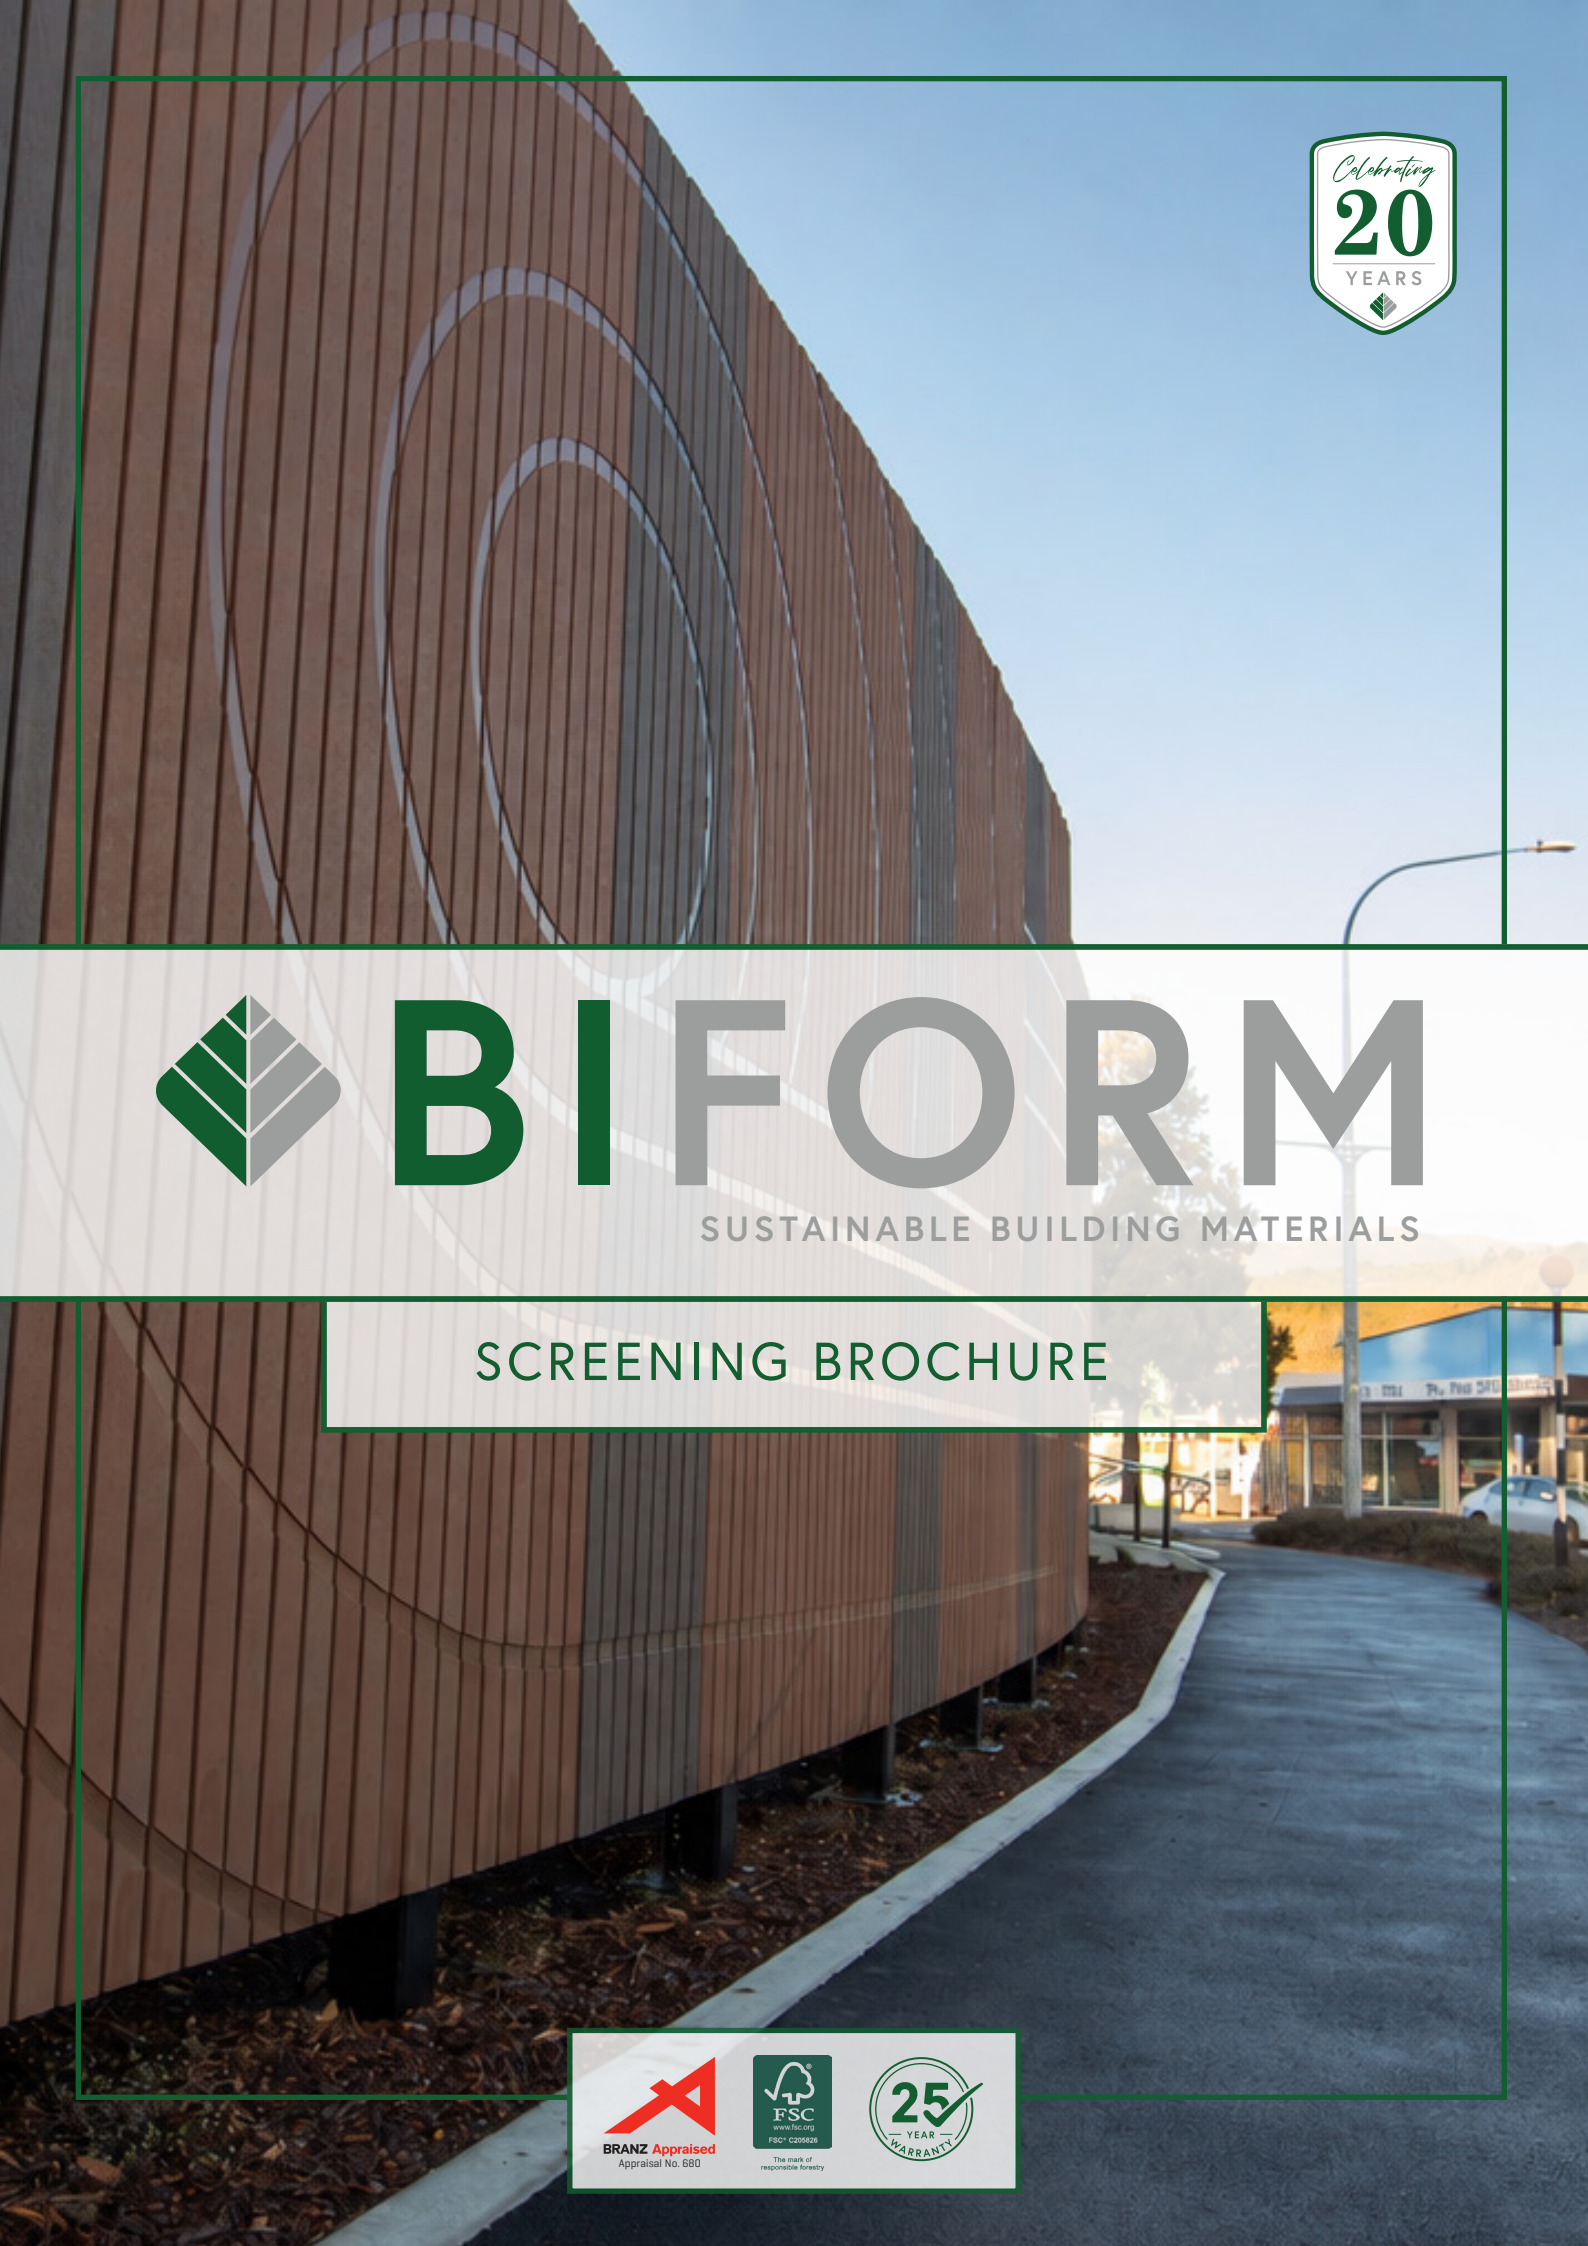


Celebrating 20 YEARS

BIFORM

SUSTAINABLE BUILDING MATERIALS

SCREENING BROCHURE

BRANZ Appraised
Appraisal No. 680

FSC
www.fsc.org
FSC® C205826
The mark of responsible forestry

25 YEAR WARRANTY

Why use BiForm Composite Screening?

Low Maintenance:

Unlike traditional timber, BiForm Composite Screening requires no painting or staining. Enjoy the natural look of wood without the hassle of regular upkeep.

Enhanced Durability:

Engineered to withstand the elements, our composite screening won't rot, decay, or succumb to insect damage, ensuring a long-lasting solution for your outdoor spaces.

Eco Friendly:

Crafted from recycled plastic and FSC Certified timber, BiForm Composite Screening aligns with our dedication to protecting the environment. It provides a responsible alternative to traditional wood products without sacrificing performance or aesthetics.

Made for New Zealand:

Designed specifically for New Zealand's unique climate conditions, BiForm Composite Screening is built to withstand the harsh UV exposure, varying temperatures, and high humidity typical of the region.

Anti-fungal:

Built with an anti-fungal agent, BiForm Composite Screening resists mold and mildew growth, maintaining a clean and healthy environment for your outdoor areas.

Simple Installation:

Our composite screening is designed for a simple, surface-fixed installation, making it a convenient option for DIY projects and professional applications alike.



BiForm Screening

Composite Screening

Batten Profile: 68mm x 17mm x 3600 mm

Explore our versatile composite screenining. Perfect for fencing, carports, concealing subframes, privacy screens, and more!

BiForm Composite Screening offers a high-quality, sustainable solution for various outdoor applications. Made from the same successful wood plastic composite as our decking, our screening battens provide the natural look of timber without the associated maintenance. With no need for painting or staining and a design that resists rot and decay, BiForm Composite Screening is the ideal choice for those seeking a durable and aesthetically pleasing alternative to traditional wood screening and fencing.

Available in three versatile colours:




Cedar Brown



Charcoal



Mid Grey

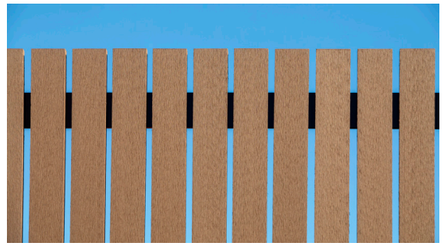


Technical Details:

Centre to Ground Post Spacing:	900 mm
Minimum Ground Clearance:	50 mm
Minimum Side to Side Gap:	5 mm
Minimum Butt Join Gap:	2 mm




Key Benefits:

- No painting or staining required
- Low-maintenance
- Won't rot or decay
- Simple installation
- Environmentally-friendly
- Natural look

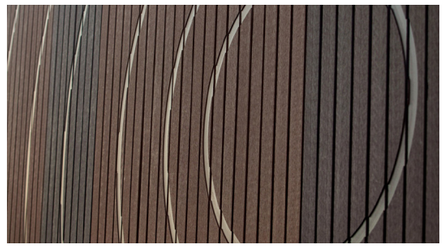

---

* BiForm Composite Screening is to be used as intended. Not suitable for use as a decking board or any load bearing/structural situation*

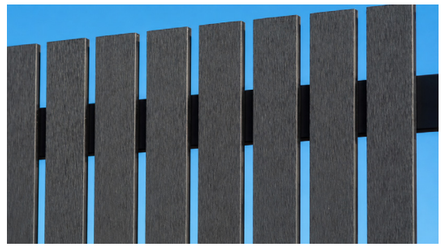


BIFORM
SUSTAINABLE BUILDING MATERIALS

www.biform.co.nz | 0800 449 274

BiForm Accessories



BiForm Deck Cleaner
- covers 70m²



Composite Decking Screw -
Vintage (Brown)
Stainless Steel 316




Composite Decking Screw -
Black
Stainless Steel 316



Composite Decking Screw -
Stainless Steel 304 (316 on request)

We're more than just composite screening! Check out our other products online.

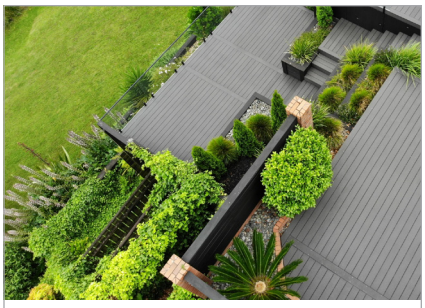

Composite Decking



Composite Sheds



SPC Flooring

BIFORM
SUSTAINABLE BUILDING MATERIALS

Celebrating 20 YEARS

Free sample pack available on request.

Free recommended layout design and quote from plans available.
Send to: info@biform.co.nz

We would love to hear your feedback or questions.
International Customers: +64 636 3511 | New Zealand Customers: 09 636 3511 / 0800 449 274

www.biform.co.nz

Find us on:

EBOSS ARCHIPRO masterspec