
IBS RigidRAP®-XT

CARE AND MAINTENANCE GUIDE
NOVEMBER 2026

SUSTAINABLE BUILDING PRODUCTS



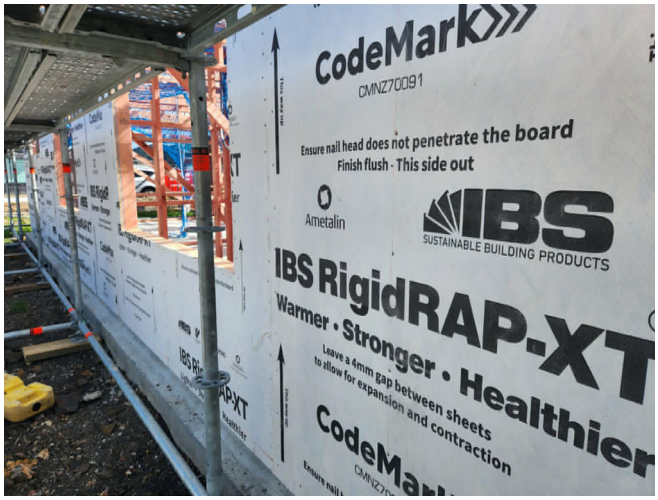

IBS RigidRAP®-XT comprises of an 8mm thick, moisture-resistant, oriented strand board (OSB3) panel with a synthetic wall underlay adhered to the outer face and a 10mm thermal break on the inside face suitable for use as a wall bracing element, structural rigid air barrier. Designed primarily for steel frame construction but can also be used with timber frame construction.

When IBS RigidRAP®-XT arrives on site it should be kept dry and well supported with timber bearers at a maximum of 600mm crs.

Where IBS RigidRAP®-XT is used as a wall bracing element or rigid air barrier, it requires no maintenance.

IBS RigidRAP®-XT should always be installed vertically with the arrows pointing upwards when installed as a bracing element.

IBS RigidRAP®-XT should always be installed as a ventilated cavity system.

The external cladding system must be maintained in accordance with the manufacturers specification.

If water damage occurs to an area where IBS RigidRAP®-XT is installed, ensure the area is allowed to dry to a moisture content of between 12-14% before replacing any cladding.

Maximum exposure to weather must not exceed 90 days.

NZBN 9429000097253

IBS RigidRAP®-XT Product Details			
L x W x Thickness (mm)	**Weight (kg)**	**IBS Product Code**	**GTIN**
2440 x 1196 x 18	17	RRAPXT182412	09421028769891
2745 x 1196 x 18	19	RRAPXT182712	09421028769907
3050 x 1196 x 18	22	RRAPXT183012	09421028769914

Scan the QR code to view all IBS RigidRAP®-XT documents.

THREE GREEN TICK APPROVED

3 Zelanian Drive, East Tamaki / 0800 367 759 / www.ibs.co.nz