

INSTALLATION INSTRUCTIONS Wall-Mount Dual Handle Basin Faucet

14415A-4 WALL-MOUNT DUAL HANDLE BASIN FAUCET

BEFORE YOU BEGIN

All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

Please leave these instructions for the consumer. They contain important information.


NOTES:

1. Flush the water supply pipes thoroughly to remove debris.
2. Inspect the supply tubing for damage. Replace as necessary.
3. Observe local plumbing codes.
4. Check for leaks before covering the pipes, repairs as needed.

HANDLE OPERATION

Both handles open with turning upwards, close with turning downwards.

ROUGH-IN DIMENSIONS

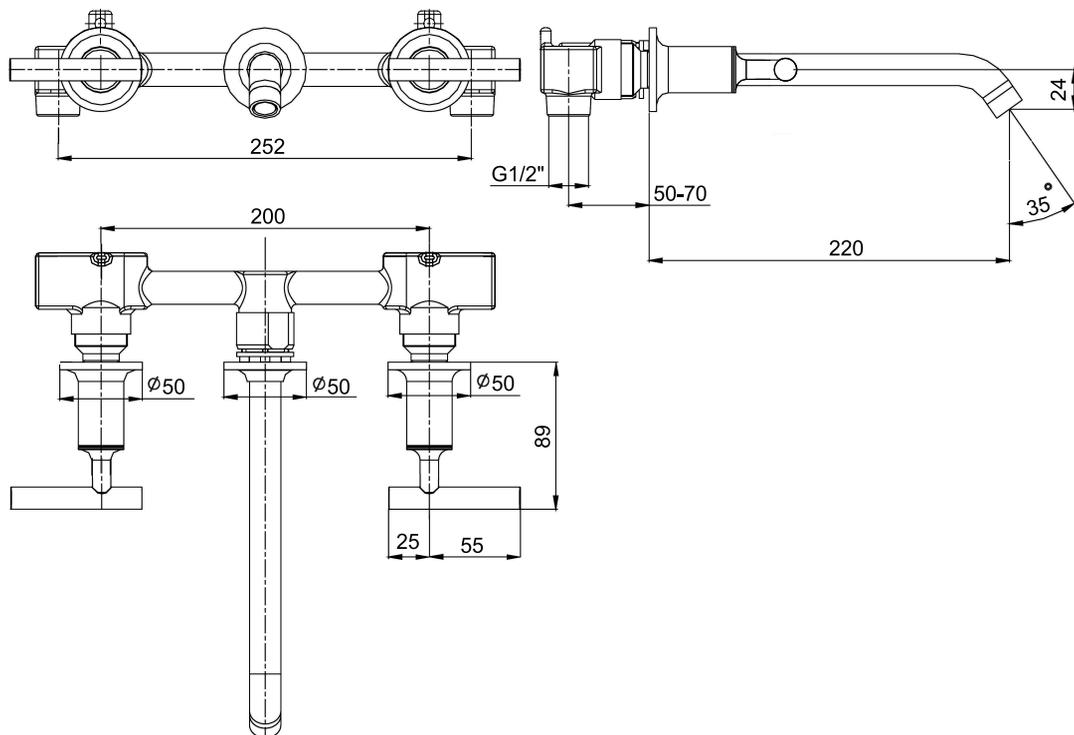


INSTALLATION

How To Install The Yoke

Do not take off guards(1) at this moment.


Connect the G1/2" water supply pipes(2) to the supply yoke(3) so the installed water supplies will be between 50mm and 70mm from the finished wall. Make sure the left supply pipe is the hot supply and connected to the end with red mark.

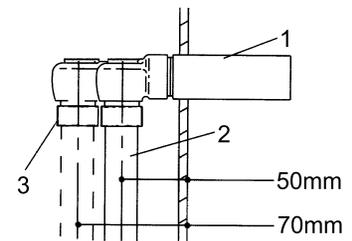


How To Install Escutcheons And Handles

Remove and discard the guards after completed the finished wall.

Screw the escutcheons(5) to the valve bodies(4) until the escutcheons against the wall. Screw the handle kits(6) to the valve bodies until the handle kits against the escutcheons. Ensure the handle kit with red washer on the left when facing the front of the faucet.

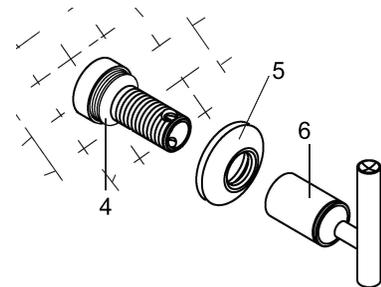


The configuration shown is the correct position of the handles in the closed position.

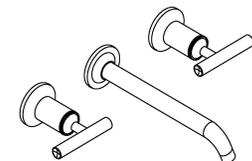

How To Install The Spout

Remove and discard the guard from the spout(7).

Thread the spout onto the spout connector(8). Unscrew the spout properly to make sure it adown. Adjust the flange(11), tighten the screws(9) by hex wrench(12) to secure the spout. Push the escutcheon(10) against the wall and ensure the mark of "KOHEL" upward.

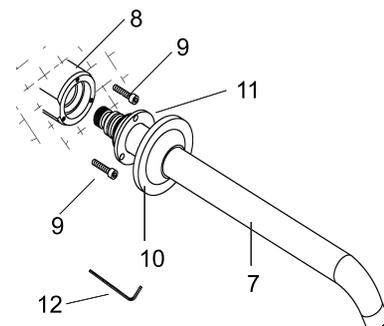


INSTALLATION CHECKOUT

Ensure that all connections are tight. Ensure that the handles are in the off position.

Open the drain. Turn on main water supply and check for leaks. Repair as required.

Remove aerator assembly(11). Turn the faucet handles on and run hot and cold water through spout for about a minute to remove any debris. Remove any debris from aerator assembly. Shut off faucet and reinstall aerator assembly.

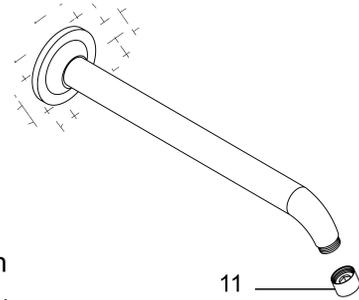

CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Kohler faucets and fittings.

14415A-4 WALL-MOUNT DUAL HANDLE BASIN FAUCET

