




X1500 BALUSTER STYLE SPECIFICATION, STANDARD SIDE-MOUNTED (EX-BA.01)SS.01.31

This is a Style Specification for the use of Extreme Barriers Systems, and must only be used in conjunction with a Fixing Specification, the Specification Notes on page 38, and the Assembly Specification on page 40. Installation must be completed in accordance with the Installation Guide on pages 64-73.

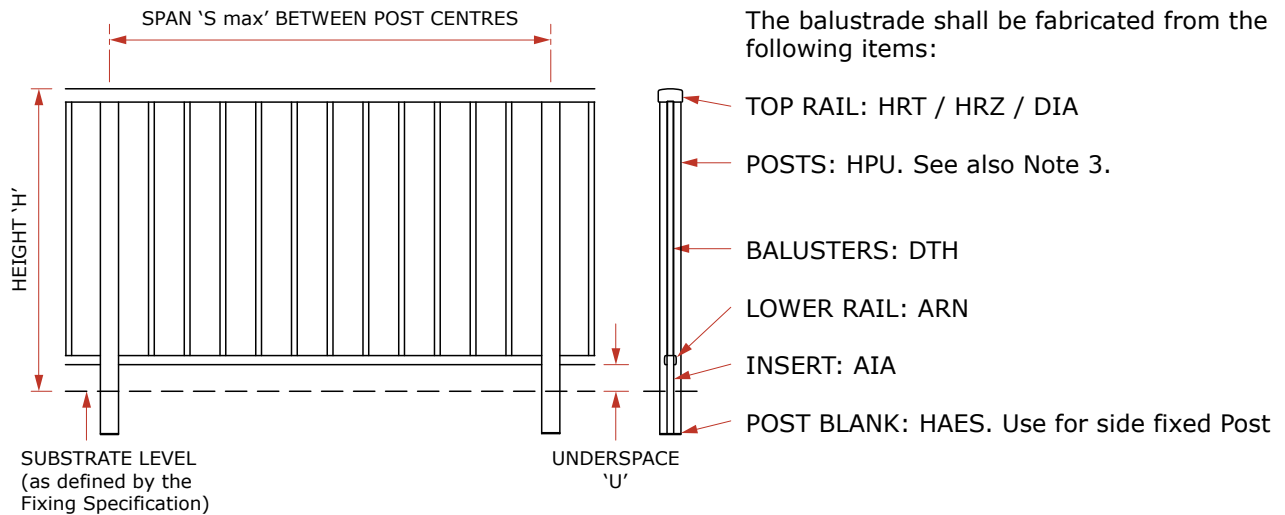

THIS SPECIFICATION IS BASED ON THE ATTACHMENT OF THE BALUSTRADE BEING IN ACCORDANCE WITH ONE OF THE STANDARD SIDE FIXING SPECIFICATIONS CONTAINED ON PAGES 26-31. REFER TO UNEX SYSTEMS FOR NON-STANDARD FIXING METHODS.

MAXIMUM POST CENTRES 'S max' (metres)				
HEIGHT (Note 2)	Post Type (Note 3)	Line No.	SPAN 'S max'	
			LOADING CLASS (Note 1)	
			N15	N07R & N07C
1.1	HPU	1	1.31	2.05
	RAILS ONLY	2	1.37	2.05
1.2	HPU	3	1.21	2.05
	RAILS ONLY	4	1.37	2.05

(1) LOADING CLASS: Refer to Page 74 of this MANUAL for the scope of the Loading Class designations.
 (2) HEIGHT 'H': is the overall height of the balustrade above the substrate level shown. Interpolate for Heights between those shown.
 (3) POST TYPES: Refer to Pages 5. "RAILS ONLY" gives the maximum span of the rails when fixed in single panels between walls or columns designed to provide adequate support to the rails.