




## X1500 BALUSTER STYLE SPECIFICATION, STANDARD TOP-MOUNTED (EX-BA.01)ST.01.31

This is a Style Specification for the use of Extreme Barriers Systems, and must only be used in conjunction with a Fixing Specification, the Specification Notes on page 38, and the Assembly Specification on page 40. Installation must be completed in accordance with the Installation Guide on pages 64-73.

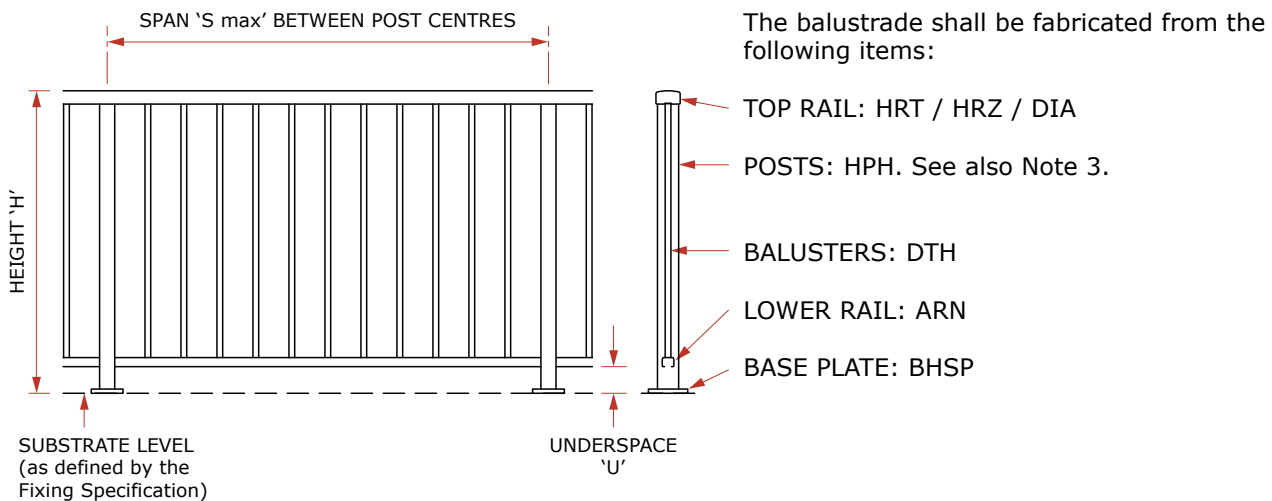

THIS SPECIFICATION IS BASED ON THE ATTACHMENT OF THE BALUSTRADE BEING IN ACCORDANCE WITH ONE OF THE STANDARD TOP FIXING SPECIFICATIONS CONTAINED ON PAGES 26-31. REFER TO UNEX SYSTEMS FOR NON-STANDARD FIXING METHODS.

MAXIMUM POST CENTRES 'S max' (metres)

| HEIGHT<br>(Note 2) | Post Type<br>(Note 3) | Line<br>No. | SPAN 'S max'           |             |
|--------------------|-----------------------|-------------|------------------------|-------------|
|                    |                       |             | LOADING CLASS (Note 1) |             |
|                    |                       |             | N15                    | N07R & N07C |
| <b>1.1</b>         | HPH                   | 1           | 0.95                   | 1.91        |
|                    | RAILS ONLY            | 2           | 1.37                   | 2.05        |
| <b>1.2</b>         | HPH                   | 3           | 0.87                   | 1.75        |
|                    | RAILS ONLY            | 4           | 1.37                   | 2.05        |

(1) LOADING CLASS: Refer to Page 74 of this MANUAL for the scope of the Loading Class designations.

(2) HEIGHT 'H': is the overall height of the balustrade above the substrate level shown. Interpolate for Heights between those shown.

(3) POST TYPES: Refer to Pages 5. "RAILS ONLY" gives the maximum span of the rails when fixed in single panels between walls or columns designed to provide adequate support to the rails.