




## X3000 BALUSTER STYLE SPECIFICATION, STANDARD TOP-MOUNTED (EX-BA.01)ST.01.51

This is a Style Specification for the use of Extreme Barriers Systems, and must only be used in conjunction with a Fixing Specification, the Specification Notes on page 38, and the Assembly Specification on page 43. Installation must be completed in accordance with the Installation Guide on pages 64-73.

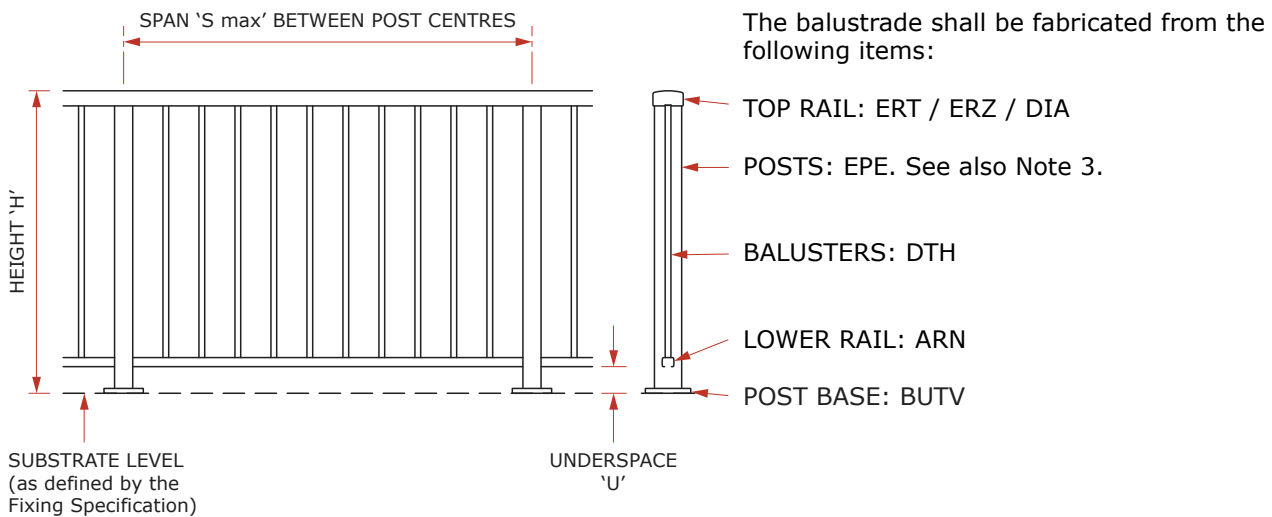

THIS SPECIFICATION IS BASED ON THE ATTACHMENT OF THE BALUSTRADE BEING IN ACCORDANCE WITH ONE OF THE STANDARD TOP FIXING SPECIFICATIONS CONTAINED ON PAGES 32-37. REFER TO UNEX SYSTEMS FOR NON-STANDARD FIXING METHODS.

MAXIMUM POST CENTRES 'S max' (metres)

HEIGHT (Note 2)	Post Type (Note 3)	Line No.	SPAN 'S max'		
			LOADING CLASS (Note 1)		
			N30	N20	N15
<b>1.1</b>	EPE	1	1.10	1.37	1.37
	RAILS ONLY	2	1.37	1.37	1.37
<b>1.2</b>	EPE	3	1.01	1.37	1.37
	RAILS ONLY	4	1.37	1.37	1.37

(1) LOADING CLASS: Refer to Page 74 of this MANUAL for the scope of the Loading Class designations.

(2) HEIGHT 'H': is the overall height of the balustrade above the substrate level shown. Interpolate for Heights between those shown.

(3) POST TYPES: Refer to Pages 5. "RAILS ONLY" gives the maximum span of the rails when fixed in single panels between walls or columns designed to provide adequate support to the rails.