




## X1500 4 SIDED GLAZED STYLE SPECIFICATION, STANDARD SIDE-MOUNTED (EX-BA.01)SS.26.31

This is a Style Specification for the use of Extreme Barriers Systems, and must only be used in conjunction with a Fixing Specification, the Specification Notes on page 38, and the Assembly Specification on page 41. Installation must be completed in accordance with the Installation Guide on pages 64-73.

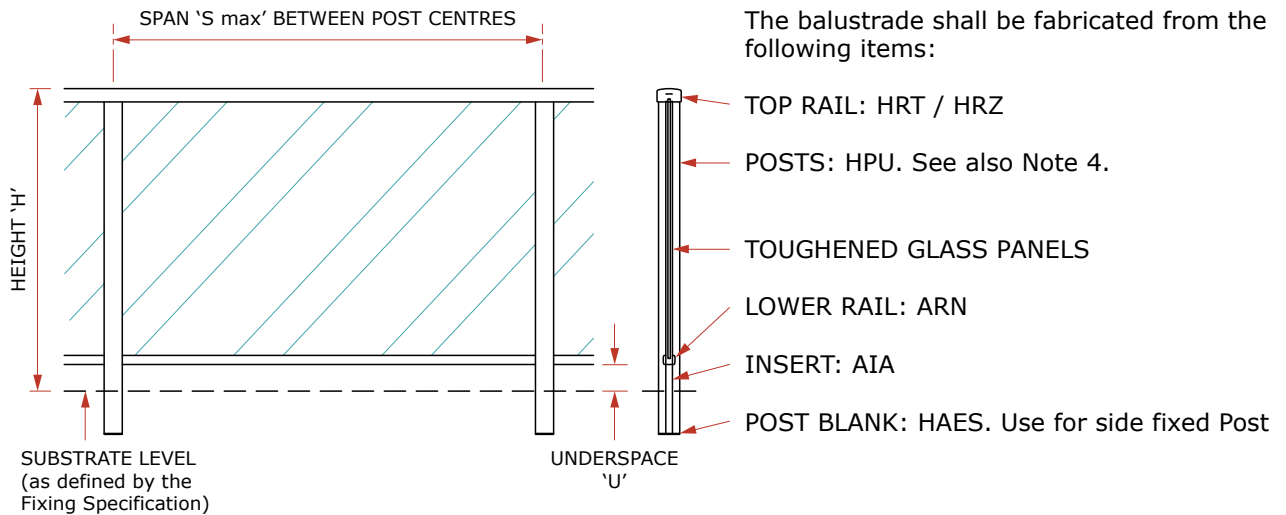

THIS SPECIFICATION IS BASED ON THE ATTACHMENT OF THE BALUSTRADE BEING IN ACCORDANCE WITH ONE OF THE STANDARD TOP FIXING SPECIFICATIONS CONTAINED ON PAGES 26-31. REFER TO UNEX SYSTEMS FOR NON-STANDARD FIXING METHODS.

MAXIMUM POST CENTRES 'S max' (metres) & MINIMUM TOUGHENED GLASS THICKNESS (Millimetres)					
HEIGHT (Note 2)	Post Type (Note 4)	Toughened Glass Thickness	Line No.	SPAN 'S max'	
				50m/s Max. Design Wind Speed (Note 3)	
				LOADING CLASS (Note 1)	
				N15	N07R & N07C
<b>1.1</b>	HPU	8	1	1.31	2.05
	RAILS ONLY	8	2	1.37	2.05
<b>1.2</b>	HPU	8	3	1.21	2.05
	RAILS ONLY	8	4	1.37	2.05

(1) LOADING CLASS: Refer to Page 74 of this MANUAL for the scope of the Loading Class designations.  
 (2) HEIGHT 'H': is the overall height of the balustrade above the substrate level shown. Interpolate for Heights between those shown.  
 (3) DESIGN WIND SPEED: in m/s, Refer to Page 38 note 4 for details of applicable wind codes and the methods for determining the Design Wind Speed for any particular site.  
 (4) POST TYPES: Refer to Pages 5. "RAILS ONLY" gives the maximum span of the rails when fixed in single panels between posts attached to walls or columns designed to provide adequate support.