

COMMERCIAL TRIMRIB ROOFING TYPICAL STEP FLASHING

DETAIL NO.

CTR011A

DATE DRAWN

28/03/12

FILE REFERENCE

RI-CTR011A.DWG

PROFILED FOAM CLOSURE STRIP (2)

ROOFING INDUSTRIES
TRIMRIB

R.I. 0.55mm STEP FLASHING
NOTCHED TURN-DOWN OVER
TRIMRIB, GAP 5mm MAX CLEAR
OF TROUGH OF ROOFING


1x55 STEELTEK & NEO

DRIP FORM SHEETS

ROOFING INDUSTRIES
TRIMRIB

UNDERLAY LAID OVER
SAFETY NETTING

STEEL PURLIN & CLEAT

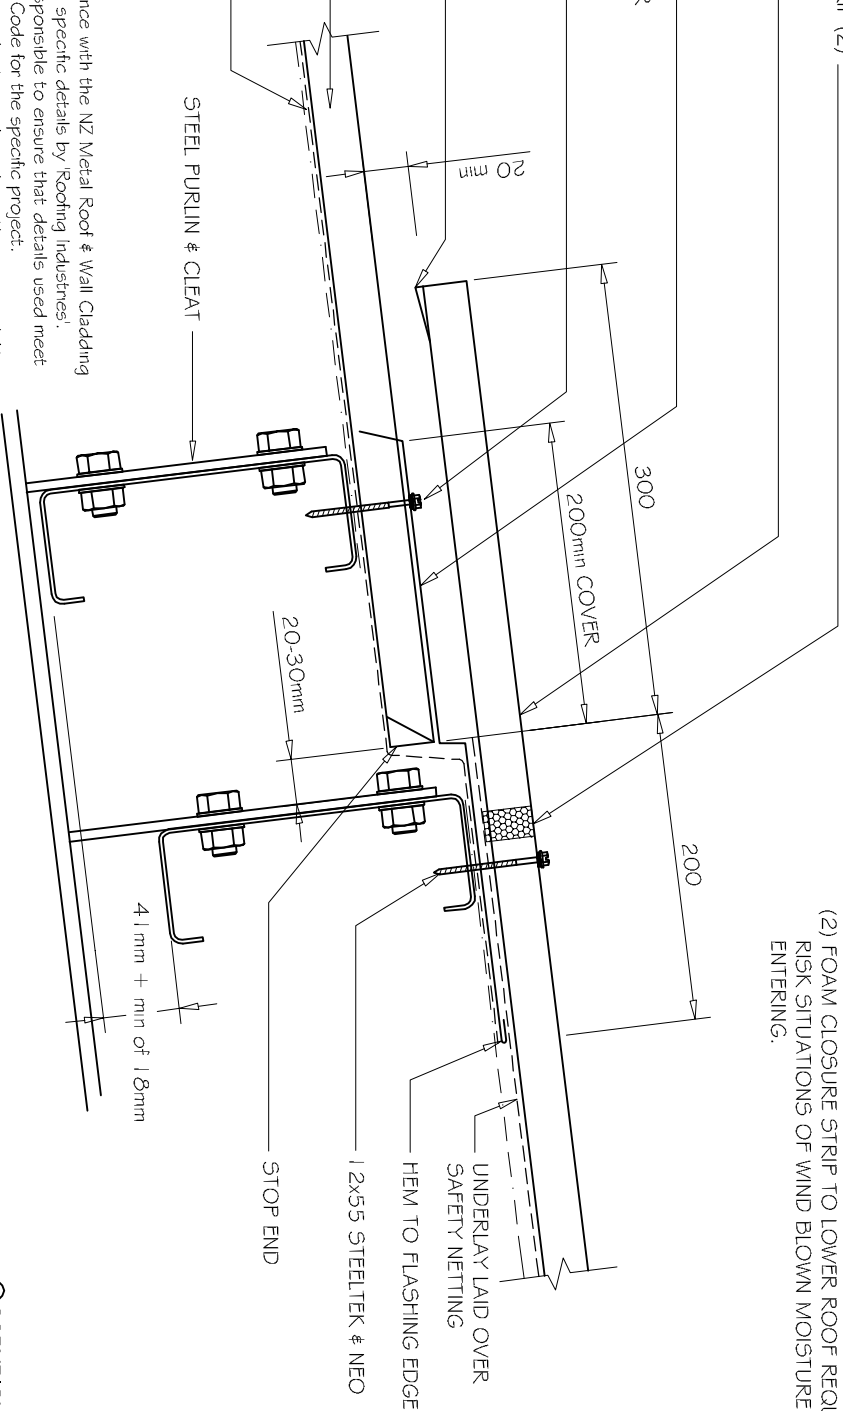


NOTE:
(1) MINIMUM PITCH 3°
(2) FOAM CLOSURE STRIP TO LOWER ROOF REQUIRED IN HIGH
RISK SITUATIONS OF WIND BLOWN MOISTURE OR DRAFTS
ENTERING.

NOTES:

- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure are indicative only and are the responsibility of the building designer.
- Thermal break or cavity battens may be required in some circumstances.
- Underlay selection and building wrap types are the responsibility of the designer. Alternative support to galvanised netting should be used in severe coastal environments including when aluminum is used.
- These details are for Roofing Industries profiles as nominated and may not be applicable to other profiles.
- This drawing is the copyright of Roofing Industries and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice www.metaloofers.org.nz
- Where necessary adjust drawings for purlin battens or cavity battens.
- Details are for steel based materials, other substrate may require some changes.

A
-
1:5
TYPICAL STEP IN ROOF



©COPYRIGHT DETAIL 2012