


# COMMERCIAL TRIMRIB ROOFING PENETRATION SOAKER FLASHING

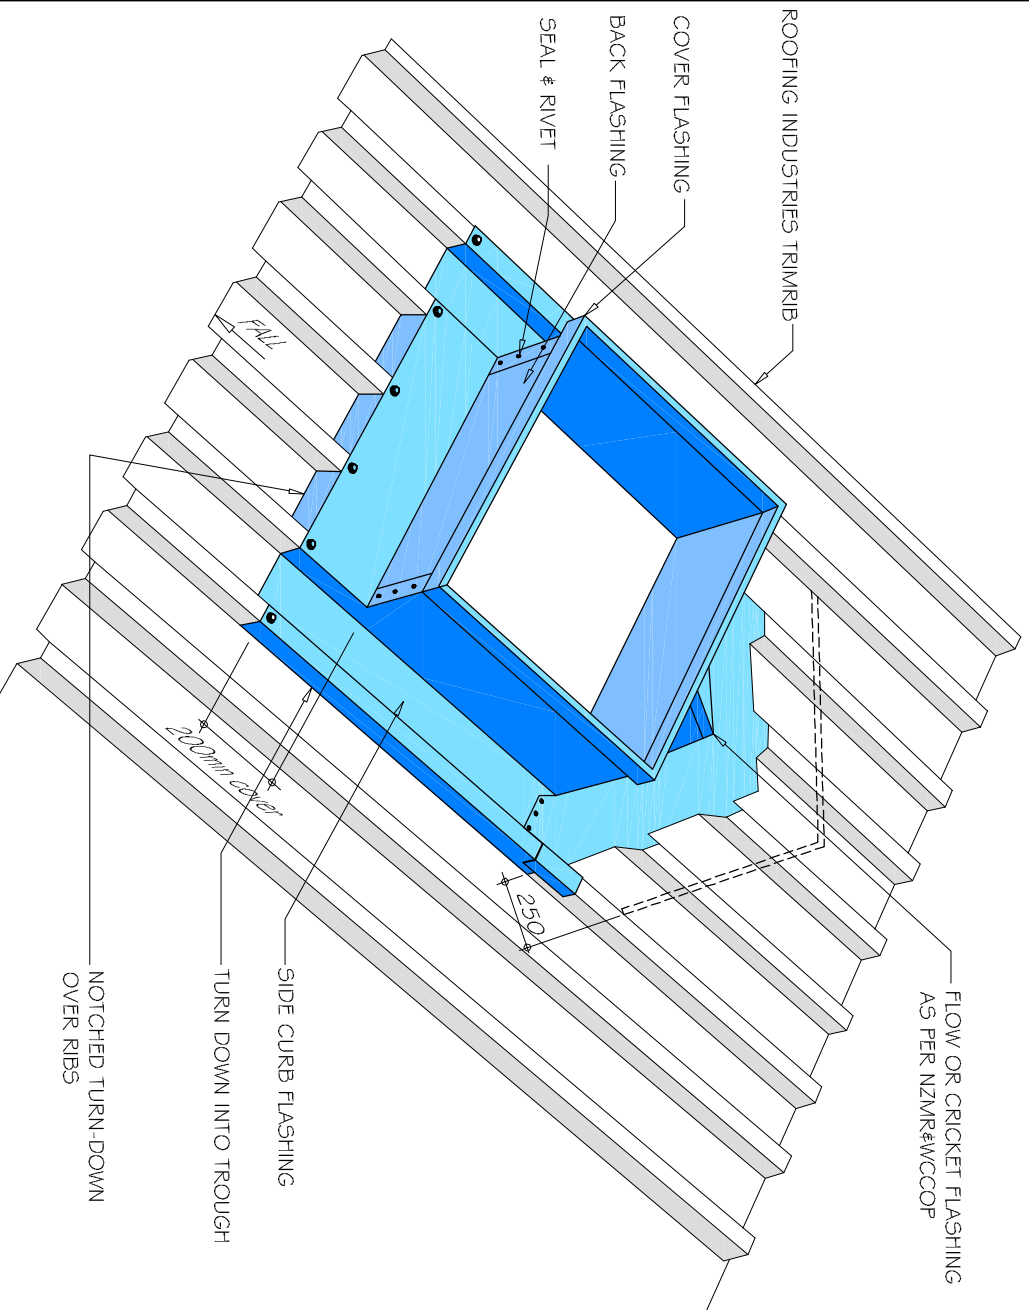

DETAIL NO.                   CTR019A  
 DATE DRAWN               28/03/12  
 FILE REFERENCE           RI-CTR019A.DWG

**NOTES:**

- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure are indicative only and are the responsibility of the building designer.
- Thermal break or cavity battens may be required in some circumstances.
- Underlay selection and building wrap types are the responsibility of the designer,
- Alternative support to galvanised netting should be used in severe coastal environments, including when aluminum is used.
- These details are for Roofing Industries profiles as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice [www.metd/roofer.org.nz](http://www.metd/roofer.org.nz)
- Where necessary adjust drawings for purlin battens or cavity battens.
- Details are for steel based materials, other substrate may require some changes.

**NOTES:**

- (1) ADDITIONAL SUPPORT FRAMING MAYBE REQUIRED WHEN PENETRATION EXCEEDS 200mm THROUGH ROOF
- (2) REFER TO SECTION G OF NZMRM CODE OF PRACTICE FOR ATTACHMENT AREA LIMITATION.

©COPYRIGHT DETAIL 2012

