



COMMERCIAL TRIMRIB ROOFING 175 BOX GUTTER DETAIL - External Bracket (Pan Fixed)

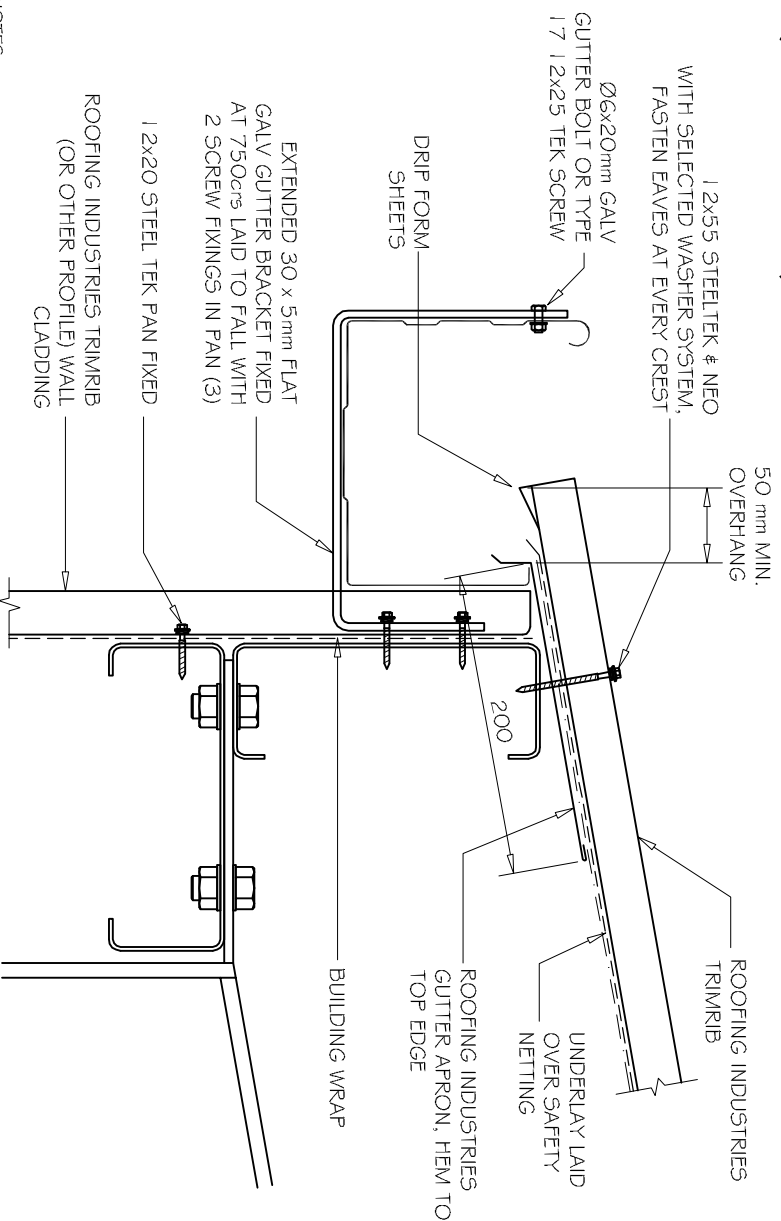

DETAIL NO.	CTR031C
DATE DRAWN	28/03/12
FILE REFERENCE	CTR031C.DWG
NOTES:	<p>(1) MINIMUM PITCH 3°</p> <p>(2) FOR CAPACITY CALCULATION REFER TO NZMRM CODE OF PRACTICE.</p> <p>(3) SNOW STRAPS & BRACKETS TO BE FITTED AT 600c/s TO ALL GUTTERS IN AREAS SUBJECT TO SNOW.</p>

NOTES:

- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by Roofing Industries.
- The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure are indicative only and are the responsibility of the building designer.
- Thermal break or cavity battens may be required in some circumstances.
- Underlay selection and building wrap types are the responsibility of the designer, Alternative support to galvanised netting should be used in severe coastal environments including when aluminum is used.
- These details are for Roofing Industries profiles as nominated and may not be applicable to other profiles.
- This drawing is the copyright of Roofing Industries and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice www.metaloof.co.nz & www.roof.co.nz
- Where necessary adjust drawings for purlin battens or cavity battens.
- Details are for steel based materials, other substrate may require some changes.



175 BOX GUTTER TRIMRIB PROFILE
1:5

©COPYRIGHT DETAIL 2012

