
COMMERCIAL RT7 ROOFING 25 BOX GUTTER DETAIL (External Bracket)

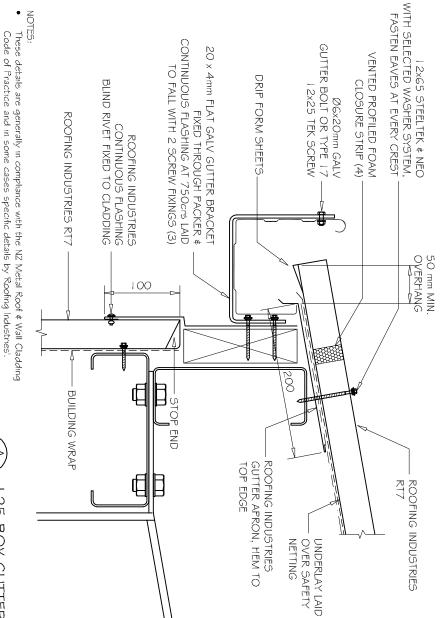

DETAIL NO

CRT7R030B

DATE DRAWN

28/03/12

FILE REFERENCE

RI-CRT7R030B.DWG

NOTES

- (1) MINIMUM PITCH 3°
- (2) FOR CAPACITY CALCULATION REFER TO NZMRM CODE OF PRACTICE.
- (3) SNOW STRAPS & BRACKETS AT 600 crs TO ALL GUTTERS IN AREAS SUBJECT TO SNOW
- (4) FOAM CLOSURE STRIP ONLY REQUIRED IN HIGH RISK SITUATIONS OF WIND BLOWN MOISTURE ENTERING OR IF BIRD OR VERMIN PROOFING IS REQUIRED

125 BOX GUTTER RT7 PROFILE

©COPYRIGHT DETAIL 2012



the building designer Thermal break or cavity battens may be required in some circumstances

The building designer is ultimately responsible to ensure that details used meet the

requirements of the NZ Building Code for the specific project.

Details of the supporting structure are indicative only and are the responsibility of

Underlay selection and building wrap types are the responsibility of the designer,

Alternative support to galvanised netting should be used in severe coastal

environments including when aluminium is used. These details are for Roofing Industries profile/s as nominated and may not be

This drawing is the copyright of 'Roofing Industries' and can only be copied or applicable to other profiles

reproduced with their permission.

Practice www.metalroofer.org.nz & www.roof.co.nz Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of

Where necessary adjust drawings for purlin battens or cavity battens

Details are for steel based materials, other substrate may require some changes