


FILE REFERENCE

RI-CRT7W090A.DWG

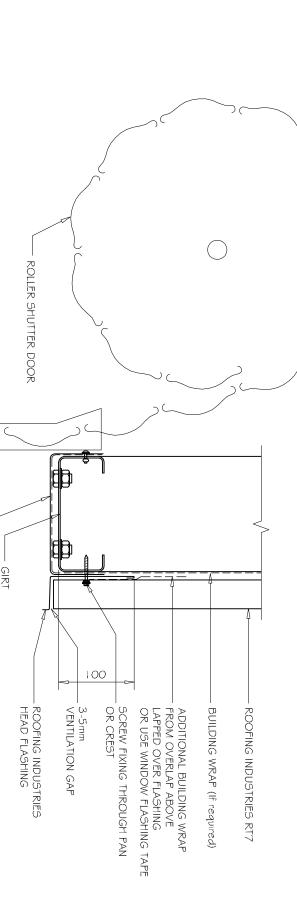

- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by Roofing Industries!
- requirements of the NZ Building Code for the specific project. The building designer is ultimately responsible to ensure that details used meet the

GUIDE RAIL FIXED TO DOOR MULLION

(if required)

INTERNAL HEAD FLASHING ROOFING INDUSTRIES

- the building designer. Details of the supporting structure are indicative only and are the responsibility of
- Thermal break or cavity battens may be required in some circumstances
- environments including when aluminium is used.
 These details are for Roofing Industries profile/s as nominated and may not be Alternative support to galvanised netting should be used in severe coastal Underlay selection and building wrap types are the responsibility of the designer,
- This drawing is the copyright of 'Roofing Industries' and can only be copied or applicable to other profiles.
- reproduced with their permission. Practice www.metalroofer.org.nz & www.roof.co.nz Further information can be obtained from the NZ Metal Roof \$ Wall Cladding Code of
- Where necessary adjust drawings for purlin battens or cavity battens
- Details are for steel based materials, other substrate may require some changes



ROLLER DOOR HEAD VERTICAL RT7

©COPYRIGHT DETAIL 2012 roof.co.nz