

COMMERCIAL MULTIDEK ROOFING SIDE APRON - CHASED

DETAIL NO. CMDR005A
DATE DRAWN 21/02/12
FILE REFERENCE R1-CMDR005A.DWG

NOTE:
(1) MINIMUM PITCH 3°
(2) A BRACKET FIXING SYSTEM MAY BE NECESSARY
WHERE LONG RUNS ARE APPLICABLE.

R.1. 0.55mm 2 PIECE APRON FLASHING
TO COVER 2 CRESTS


10mm GAP IF COMPLIANCE
WITH E2/AS1

SCREW FIXING WITH
1.2x25 TYPE 1.7 TEK & NEO
OR 4.8mm ALUM RIVETS
MIDSPAN WHERE APPLICABLE
(offset for clarity)

5mm MAX CLEAR OF
TROUGH OF ROOFING

UNDERLAY LAID OVER
SAFETY NETTING


ROOFING INDUSTRIES
MULTIDEK

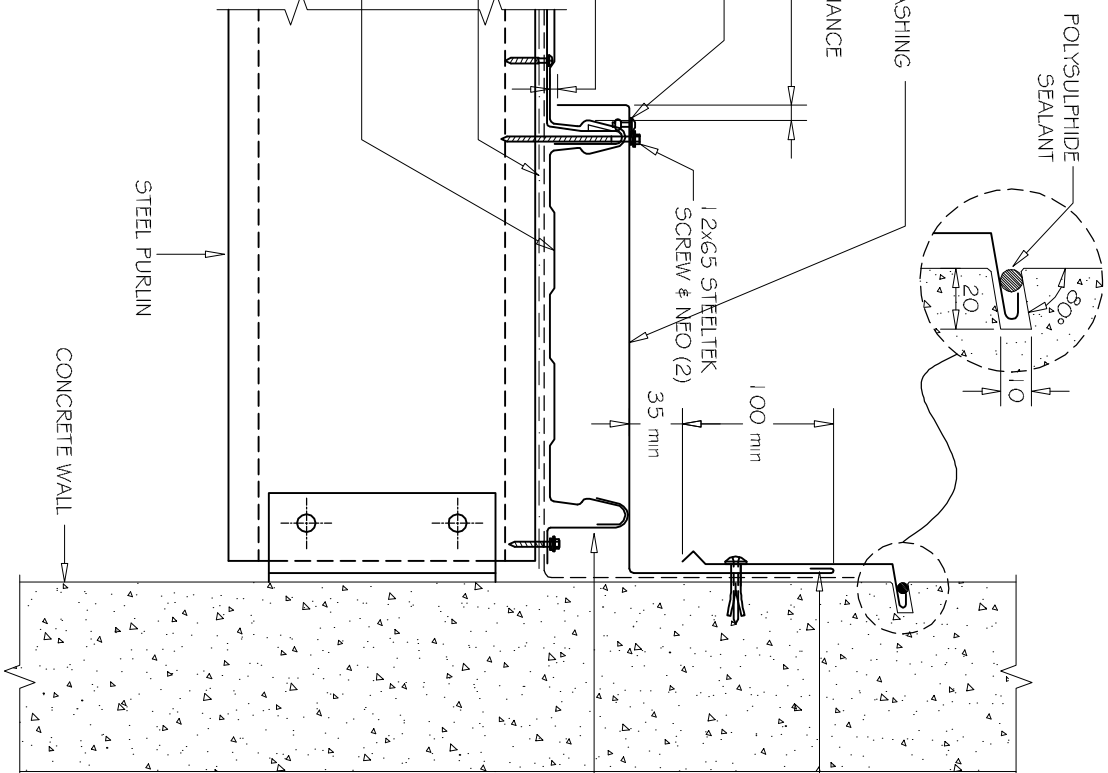

HEM TO
FLASHING
EDGE

MODIFIED CLIP
TO END

- NOTES:
- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
 - The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
 - Details of the supporting structure are indicative only and are the responsibility of the building designer.
 - Thermal break or cavity battens may be required in some circumstances.
 - Underlay selection and building wrap types are the responsibility of the designer. Alternative support to galvanised netting should be used in severe coastal environments, including when aluminum is used.
 - These details are for Roofing Industries profiles as nominated and may not be applicable to other profiles. This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission. Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice www.metlroofer.org.nz & www.roof.co.nz
 - Where necessary adjust drawings for purlin battens or cavity battens.
 - Details are for steel based materials, other substrate may require some changes.

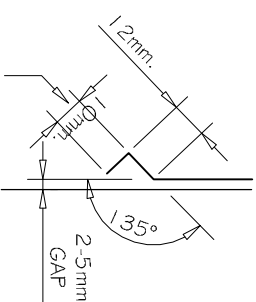

Bird's beak dimension
may vary between
manufacturing locations.

A SIDE APRON CHASED
1:5

©COPYRIGHT DETAIL 2012

