

COMMERCIAL MULTIDEK ROOFING TRANSLUCENT

DETAIL NO.


CMDR04 1 A

DATE DRAWN


1 6/08/12

FILE REFERENCE

RI-CMDR04 1 A.DWG

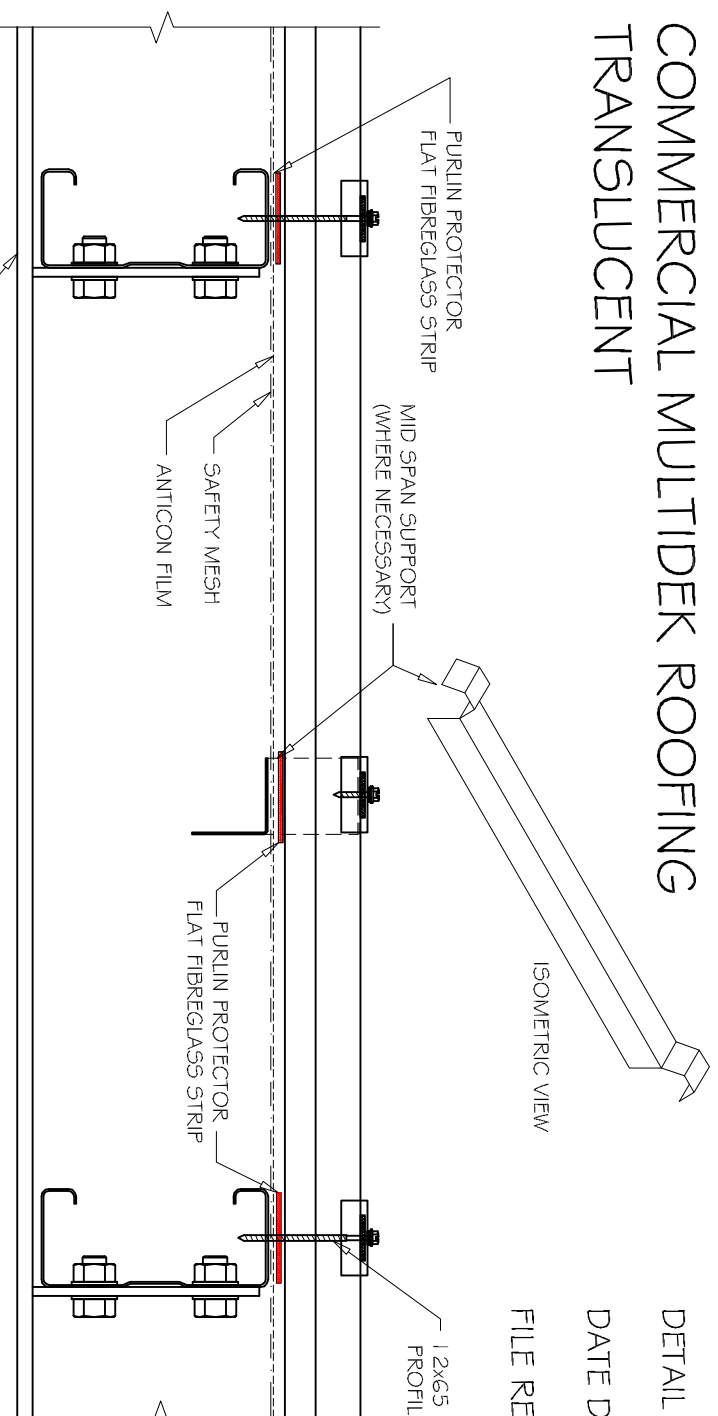

- NOTE:
- (1) MINIMUM PITCH 3°
 - (2) DRILL OVERSIZE HOLES IN TRANSLUCENT SHEETING PRIOR TO FIXING.
 - (3) USE MID SPAN SUPPORT WHEN SPANS EXCEED MAXIMUM SPAN, OR SPECIFY HEAVIER WEIGHT GRP SHEET WHICH IS THE RECOMMENDED OPTION.
 - (4) USE ANTI CONDENSATION FILM UNDER CLEAR SHEETS WHERE CONDENSATION LIKELY, BUT DIFFICULT TO USE WHERE MIDSPAN SUPPORTS ARE USED.

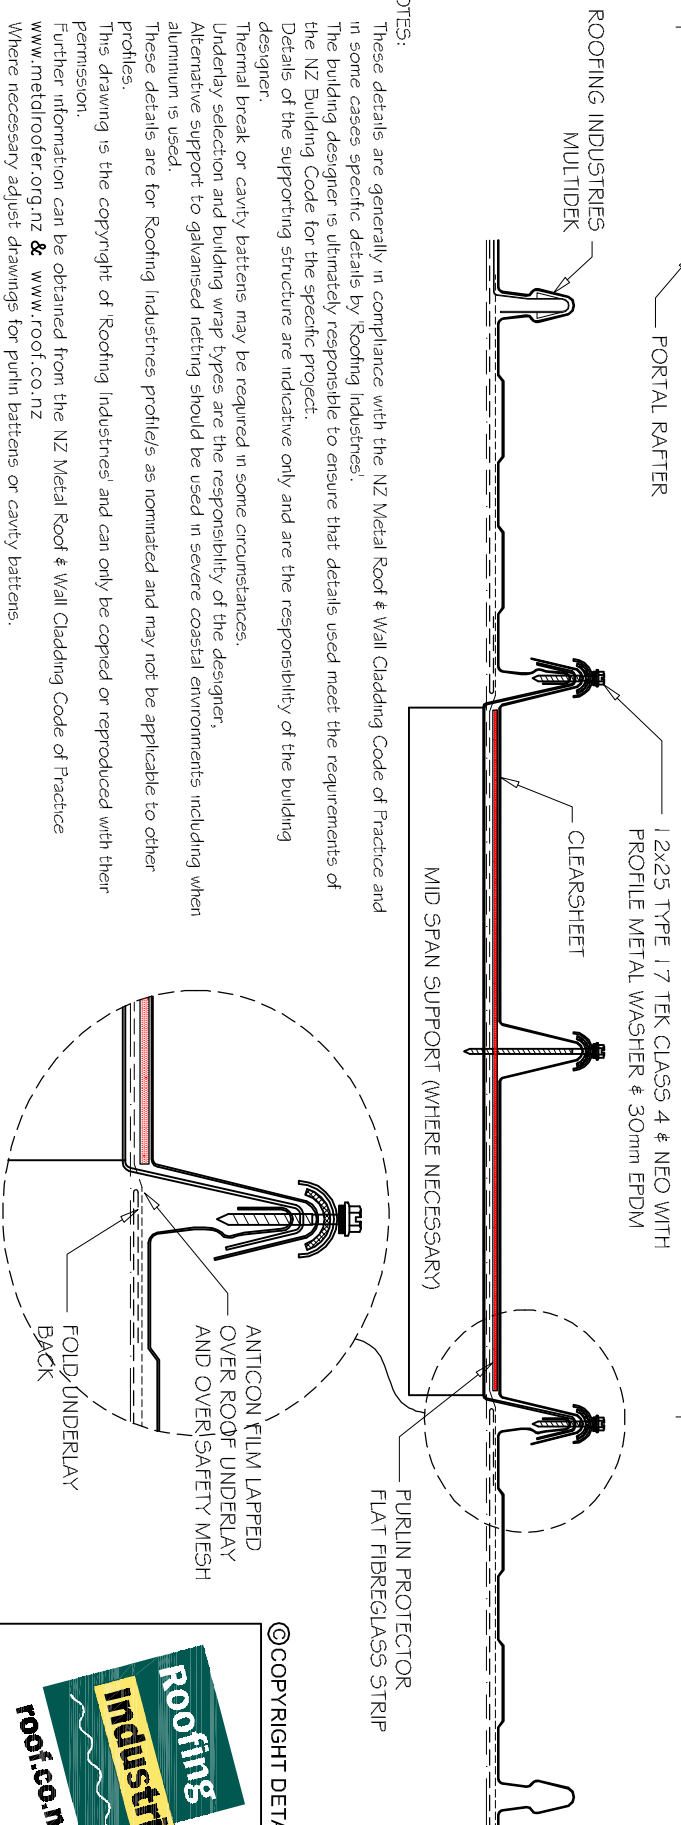

- NOTES:
- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
 - The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
 - Details of the supporting structure are indicative only and are the responsibility of the building designer.
 - Thermal break or cavity battens may be required in some circumstances.
 - Underlayment selection and building wrap types are the responsibility of the designer.
 - Alternative support to galvanised netting should be used in severe coastal environments including when aluminium is used.
 - These details are for Roofing Industries profiles as nominated and may not be applicable to other profiles.
 - This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
 - Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice www.metaloofers.org.nz & www.roof.co.nz
 - Where necessary adjust drawings for Purlin battens or cavity battens.
 - Details are for steel based materials, other substrate may require some changes.

©COPYRIGHT DETAIL 2012

