## ROLLER DOOR JAMB FOR HORIZONTAL CLADDING. COMMERCIAL MAXISPAN

DETAIL NO


CMSW090B-1

DATE DRAWN

1 1/03/12

FILE REFERENCE

RI-CMSW090B-I.DWG

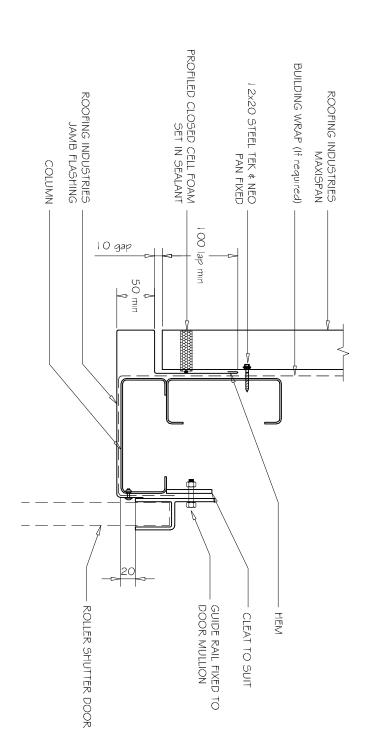

- These details are generally in compliance with the NZ Metal Roof \$ Wall Cladding Code of Practice and in some cases specific details by Roofing Industries!
- the requirements of the NZ Building Code for the specific project The building designer is ultimately responsible to ensure that details used meet
- of the building designer Details of the supporting structure are indicative only and are the responsibility
- Thermal break or cavity battens may be required in some circumstances
- environments including when aluminium is used.
  These details are for Roofing Industries profile/s as nominated and may not be Alternative support to galvanised netting should be used in severe coastal Underlay selection and building wrap types are the responsibility of the designer
- applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or
- of Practice www.metalroofer.org.nz & www.roof.co.nz Further information can be obtained from the NZ Metal Roof & Wall Cladding Code
- Where necessary adjust drawings for purlin battens or cavity battens
- Details are for steel based materials, other substrate may require some changes



ROLLER DOOR JAMB HORIZONTAL MAXISPAN

©COPYRIGHT DETAIL 2012

