

**FLASHING WIDTH TABLE - "X"mm  
(BASED ON TABLE 7, E2/AS1, 24 DECEMBER 2011)**

**SITUATION 1:** LOW, MEDIUM OR HIGH WIND ZONES, WHERE ROOF PITCH IS GREATER THAN OR EQUAL TO 5°.


**SITUATION 2:** ALL ROOF PITCHES IN VERY HIGH WIND ZONES.  
VERY HIGH WIND ZONE WHERE ROOF PITCH IS LESSER THAN OR EQUAL TO 5°.

**SITUATION 3:** ALL ROOF PITCHES IN EXTRA HIGH WIND ZONES.

	<b>SITUATION 1 (MINIMUM)</b>	<b>SITUATION 2 (MINIMUM)</b>	<b>SITUATION 3 (MINIMUM)</b>
<b>TRANSVERSE FLASHING</b>	130	200	200

**PSP - ALUMINIUM & TIMBER RAFTER SPACING  
TABLE**

<b>SHEET THICKNESS</b>	<b>6mm SHEET</b>	<b>8mm SHEET</b>
<b>ALUMINIUM RAFTER SPACING</b>	600 crs	750 crs

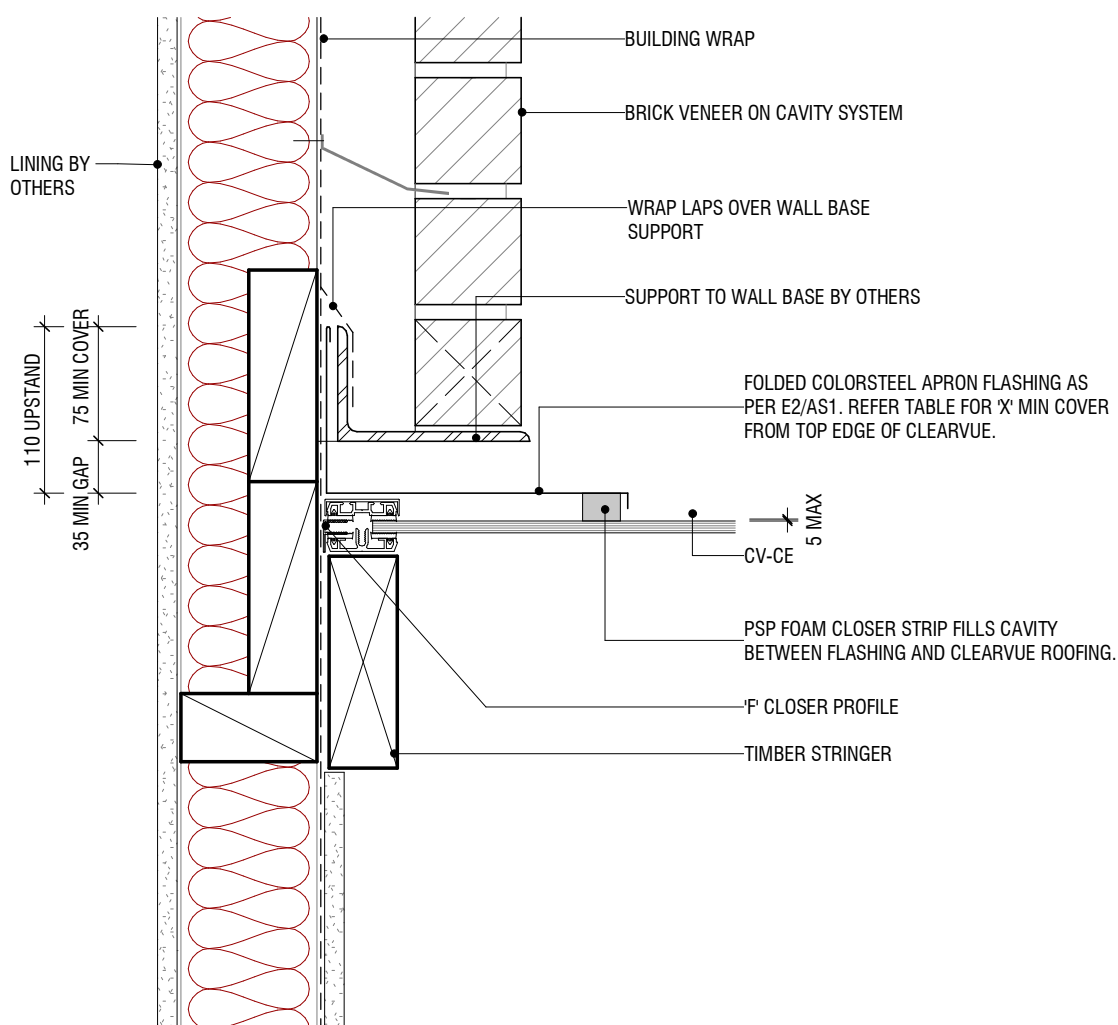

NOTE: Recommended roof pitch 5°. Minimum roof pitch of 3°, consult your PSP agent for suitable applications.

NOTE: All dimensions are in millimeters (mm)

**ClearVue**

**TYPICAL BARGE DETAIL - BRICK VENEER**

320 Rosedale Road, Albany, Auckland, New Zealand  
PO Box 101 851 NSMC, New Zealand

Note: Details may be subject to change without notification



T.09 415 2800  
F.09 415 2809  
www.psp.co.nz

ClearVue roofing system to be installed and fixed to suitable structural support, complying with relevant clauses of the NZBC and the New Zealand Building Act.

Scale: 1 : 5@ A4

Date: 10/12/2019

Dwg: **XX-AP-04**