
CLEARSPAN or CLEARVIEW FACE FIXED TO TIMBER WITH CASTAWAY BRACKET- BOLT THROUGH



			Leverage height <u>max</u> (distance from top of handrail to bottom of post)								
			0.95m	1.00m	1.05m	1.10m	1.15m	1.20m	1.25m	1.30m	1.35m
Glass or Solid infill (Vista, Classic, Clearview)	Up to very high wind zone (50m/s)	Maximum post ctrs	1.39m	1.32m	1.26m	1.20m	1.15m	1.10m	1.05m	0.95m	0.85m
	Extra high wind zone (55m/s)		1.39m	1.32m	1.24m	1.13m	1.03m	0.95m	0.87m	0.78m	0.68m
35% max closed area (Settler, Heritage, Face hung fin)	All wind zones (up to 55m/s)		1.39m	1.32m	1.26m	1.20m	1.15m	1.10m	1.05m	0.95m	0.85m

- Applicable to occupancy types A, B, C3 & E.
- This fixing detail PS1 should be used in conjunction with the appropriate system PS1.
- This is a balustrade connection detail. Deck design, construction and water-proofing is the responsibility of others. For all other applications or non-standard or site specific connections not covered under the standard detail manual please contact Spectrum.



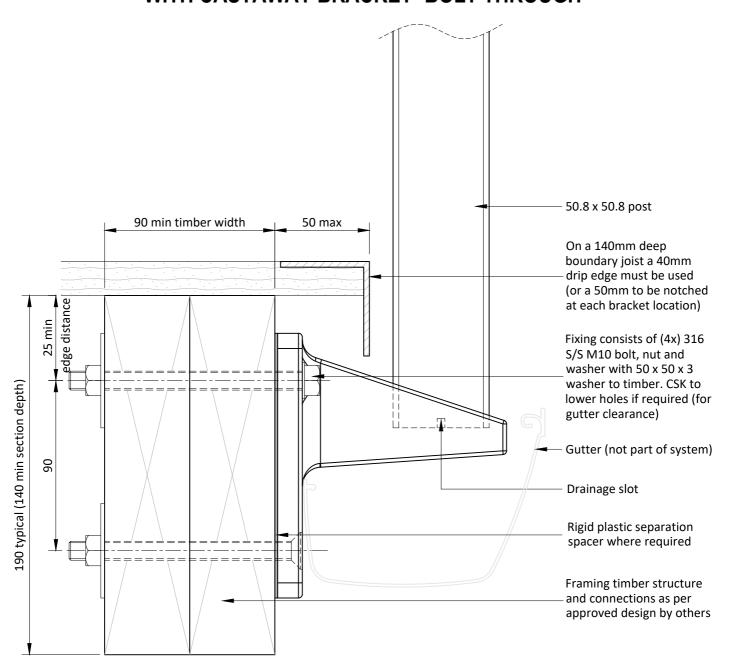



Building Code Clause(s) B1

	ODUCER STATEMENT - ance on use of Producer Statements is avail			ISSUE: 1
ISSU	ED BY:	Kirk Roberts Consulting Enginee	rs Ltd.	PROJECT NO: 2150118
TO:		Spectrum		
то в	E SUPPLIED TO:	(Owner/Developer) Territorial Local Authority (Building Consent Authority)		
	ESPECT OF: Spectrum — Cleantersigned by myself and Kirk	rspan or Clearview face fixed to timbe Roberts, dated 10/05/22) (Description of Building Work)	er with Castaway t	oracket – bolt through (Drawing
AT: I	Nationwide ess)	LOT	DP	so
the r All	requirements of Clause(s) B1/ or Part only (as specified i	n the attachment to this statement), of the	_	
		en prepared in accordance with: y the Ministry of Business, Innovation & Er		VM1 or
	Alternative solution as per the a	tached schedule	•	on method / acceptable solution)
On b i) ii) iii) v) v) vi)	Structural design loads are structures not in other important The PS1 is for the balustrade the balustrade system (included This certificate does not cover This Producer Statement - De Inspections of the structural	meet their performance specification re based on a 50-year design life and Im tance levels) as defined in AS/NZS 1170, system listed above only. The design of ding torsional loads) is the responsibility	nportance Level 2 s .0 2004 clause 3.3; the supporting stru of others; within 2 year from the Building Consent Au	cture for the loads imposed from ne date of issue; athority (council). As Kirk Roberts
docu pers	ıments provided or listed in the	hat a) the building, if constructed in acc attached schedule, will comply with the r esign have the necessary competency to d	elevant provisions of	
The	a Member of: Engineering N	New Zealand NZIA and hold the followient holds a current policy of Professional In		
Date	e: 10/05/2022 (signature)	N BEHALF OF Kirk Roberts Consulting Eng	(Design Firm)	
Note:	: This statement shall only be relied up	on by the Building Consent Authority named above	. Liability under this state	ment accrues to the Design Firm only. The

This form is to accompany Form 2 of the Building (Forms) Regulations 2004 for the application of a Building Consent.

building work, whether in contract, tort or otherwise (including negligence), is limited to the sum of \$200,000*.

total maximum amount of damages payable arising from this statement and all other statements provided to the Building Consent Authority in relation to this